

# Separate Controller Ionizer

## Bar Type / Nozzle Type




**Space Saving**

Bar type  
**IZT40/41/42 Series**

Height **37 mm** x Width **30 mm**

**New** Nozzle type  
**IZT43 Series**

Height **32 mm** x Width **16 mm**

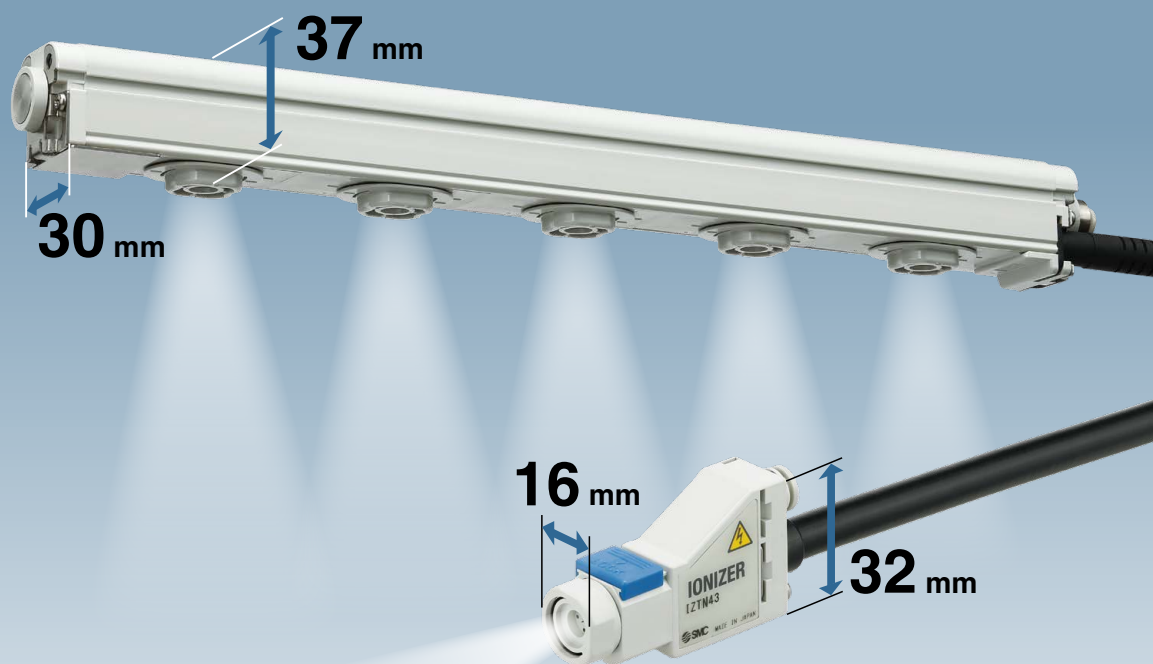

Potential amplitude: **25 V** or less<sup>\*1</sup>

Rapid static neutralization: Fastest time **0.1 s**<sup>\*2</sup>

Static neutralization is possible even when air is not being supplied.

| Type     | Application                                   | Bar          | Nozzle       |
|----------|---|--------------|--------------|
| Dual AC  | For reducing the potential amplitude          | <b>IZT42</b> | —            |
| AC       | For maintaining a constant offset voltage     | <b>IZT41</b> | <b>IZT43</b> |
| Standard | Simple operation by just turning the power on | <b>IZT40</b> | —            |

\*1 IZT42 installation height: 300 mm

\*2 IZT40, 41

Conditions: Discharge time from 1000 V to 100 V

Object to be neutralized: Charged plate (150 mm x 150 mm, Capacitance 20 pF)

Installation distance: 100 mm (High speed static neutralization cartridge, Tungsten electrode needle with air purge)

Bar length: 1120 mm

# IZT40/41/42/43 Series



CAT.ES100-120C

Bar

## Dual AC Type *IZT42 Series* (Potential amplitude reduction specification)

Potential amplitude: **25 V or less**<sup>\*1</sup>

Rapid static neutralization: **0.1 s**<sup>\*2</sup>

\*1 IZT42 installation height: 300 mm

\*2 IZT40, 41

Conditions: Discharge time from 1000 V to 100 V

Object to be neutralized: Charged plate (150 mm x 150 mm, Capacitance 20 pF)


Installation distance: 100 mm (High speed static neutralization cartridge, Tungsten electrode needle with air purge)

Bar length: 1120 mm




### The potential amplitude can be reduced with SMC's original dual AC type sensor.

Static neutralization in consideration of damage to a device which is sensitive to electrostatic discharge (ESD) can be achieved. The potential amplitude applied to the applicable workpiece is reduced even if the workpiece is mounted within close proximity of the ionizer.

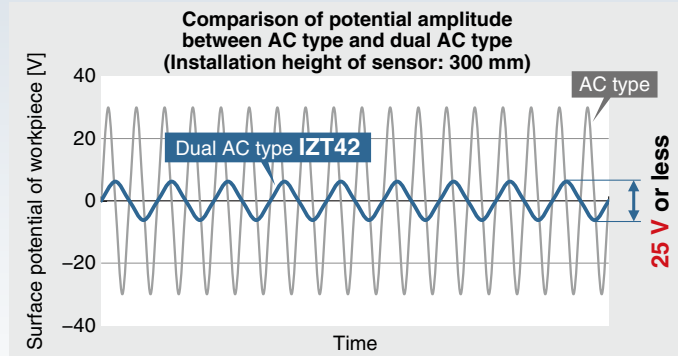


#### Dual AC type IZT42

+ ions and - ions are discharged at the same time to allow the + and - ions to reach the workpiece evenly, thereby reducing the potential amplitude.

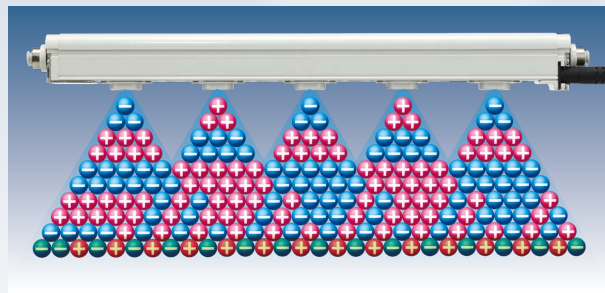


#### AC type IZT40, 41, 43

+ ion and - ion layers reach the workpiece alternately, which increases the potential amplitude.

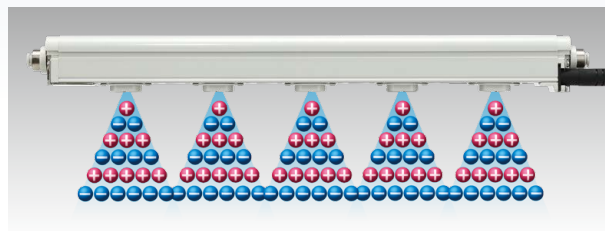


#### Application Examples For the static neutralization of glass substrates



Prevents the breakage of glass substrates by the static electricity generated when the substrate is lifted from the surface plate

#### For the static neutralization of electric substrates



- Prevents element disruption due to discharge
- Prevents the adhesion of dust

## AC Type *IZT41, 43 Series*



### ● With auto balance function

\* The controller can be used with either type. Use a high voltage power supply module compatible with the selected type.



IZT41

IZT43







- Emitter contamination detection continually displayed and output
- Individual ON/OFF command from an external input signal

### With auto balance function

The sensor is installed within the ionizer body and may be mounted anywhere.

The offset voltage (ion balance) in the static neutralization area is controlled so that the voltage is maintained at a constant value by monitoring the ions emitted from the ionizer using the ground line.

#### Effect of auto balance (Image)

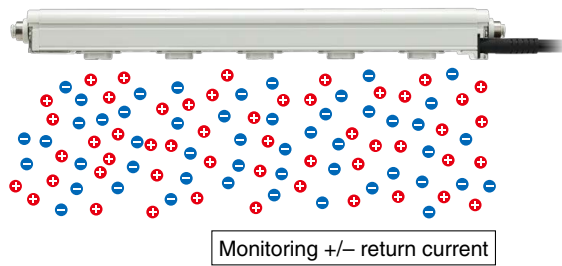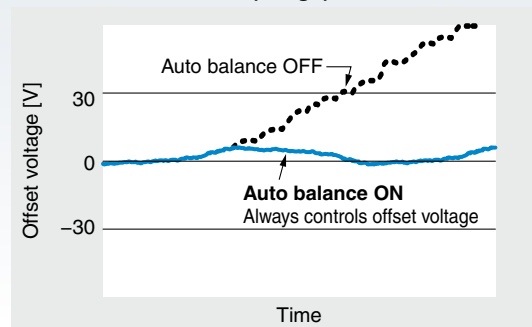

### Standard Type IZT40 Series



- Simple operation: Can be controlled by powering the ionizer ON

An AC adapter is available.

(The AC adapter can only be used for 1 ionizer.)




■ The compact body allows for space saving.



- Reduced height



57 mm shorter  
(60%)

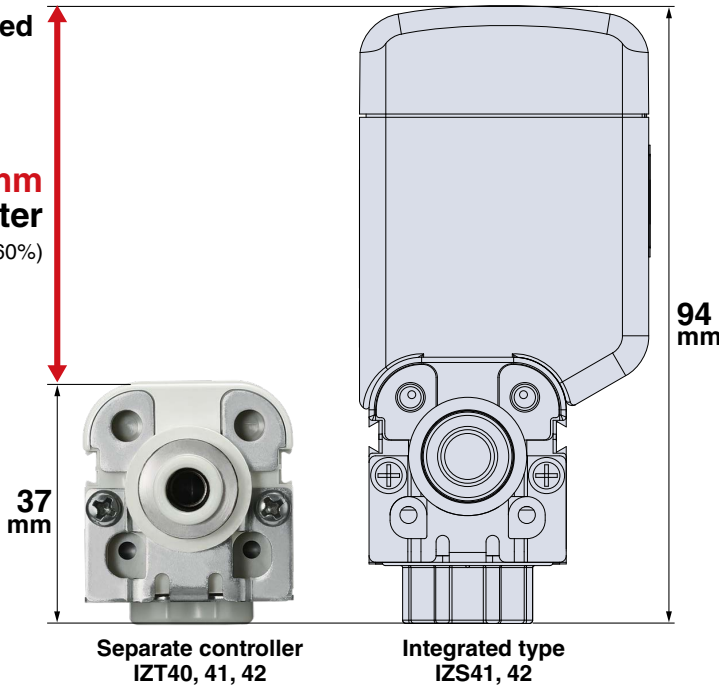

30 mm



- Can be mounted in narrow spaces

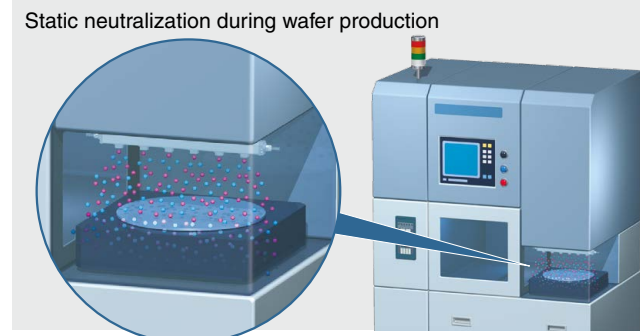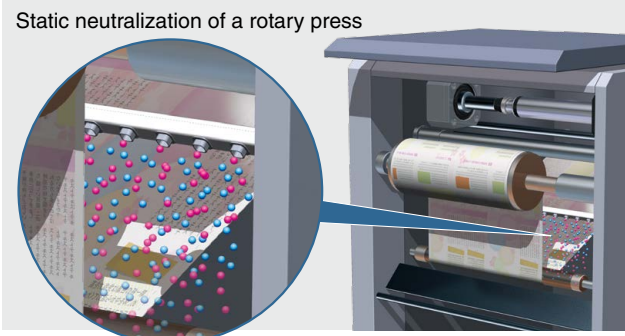


■ Space saving



Thickness 16 mm x Width 53 mm x Height 32 mm

- For the removal of dust and static neutralization by air blow

For the static neutralization of plastic bottles and particle elimination

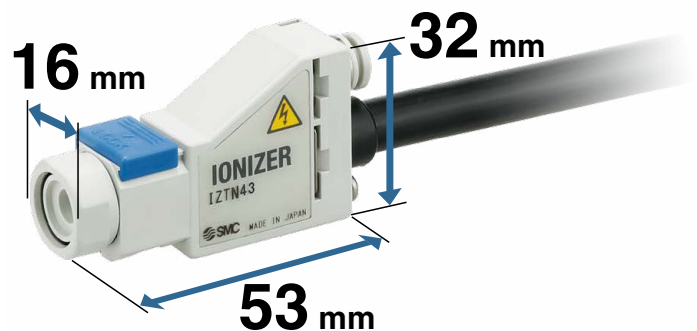


## One controller can control a maximum of 4 ionizers.




- Mixed bar and nozzle connection is possible.

Concentrated control is available.

- Bar and nozzle errors can be detected.
- Contamination of the emitter can be monitored.

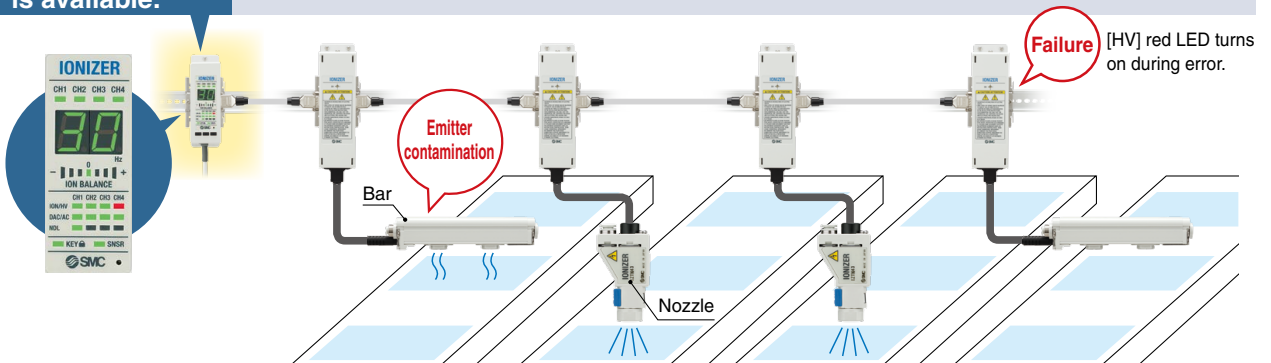


## A flexible layout can be achieved due to the various module connection methods.

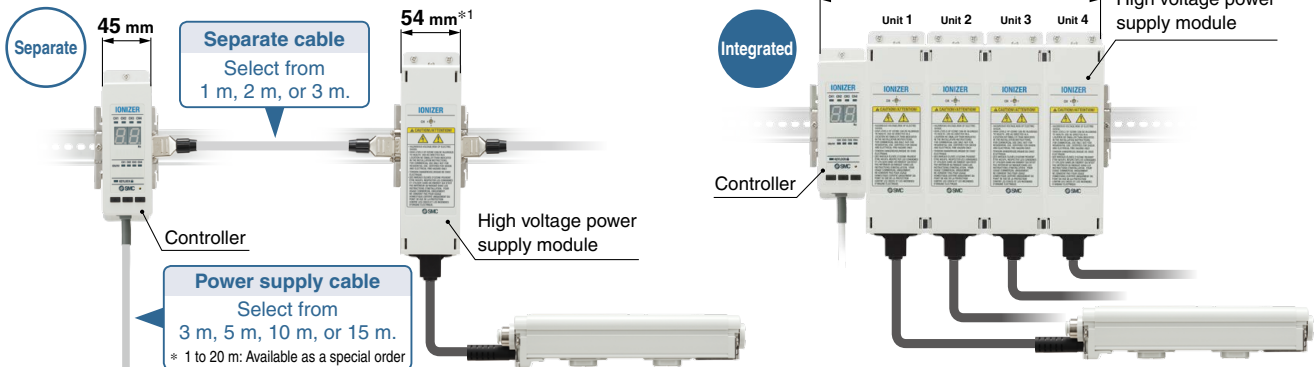

\*1 For IZT40, 41, 43


- Max. installation distance between controller and bar/nozzle: 15 m

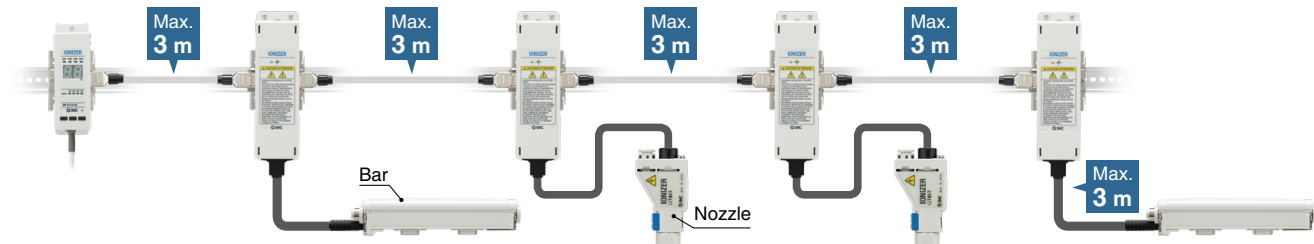


## The simple installation of each module is possible by connector connection.




- The connector connection of cables is possible for each module after installation.

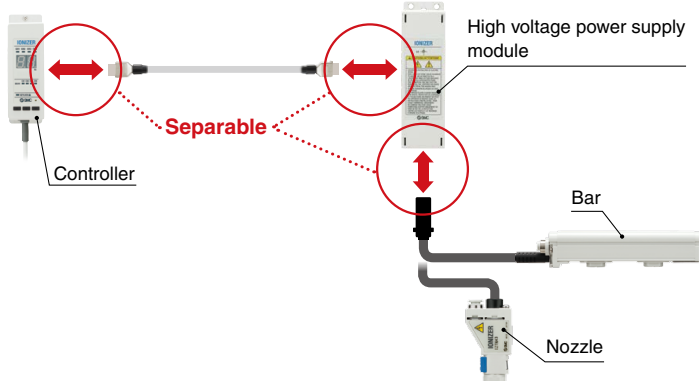

## Easy insertion and removal due to connector connection





## For the insertion and removal of high voltage cables

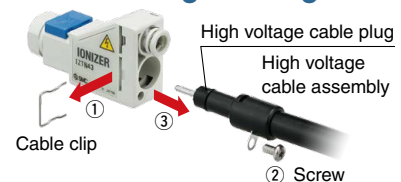



## Various low maintenance cartridges can be selected according to the application.

- Minimizes the contamination of emitters by discharging compressed air at the surface of the emitters

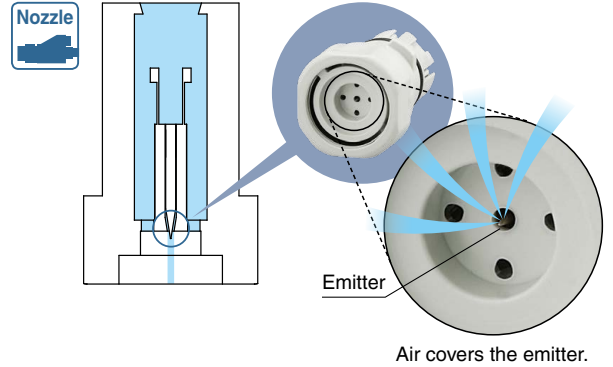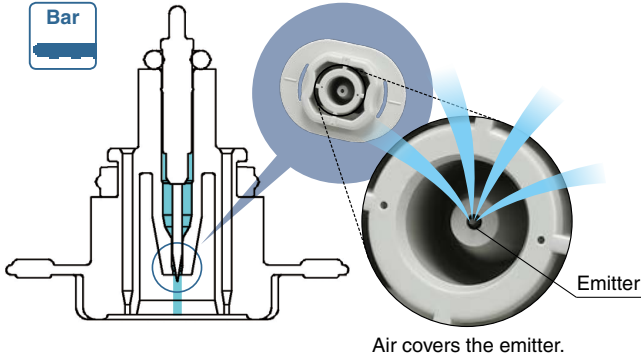


### Emitter cartridge type

#### High speed static neutralization cartridge

##### Long range static neutralization and dust removal


1 cartridge equipped with 2 assist air nozzles allows for high speed static neutralization by transferring ionized air produced in the emitter to the workpiece.

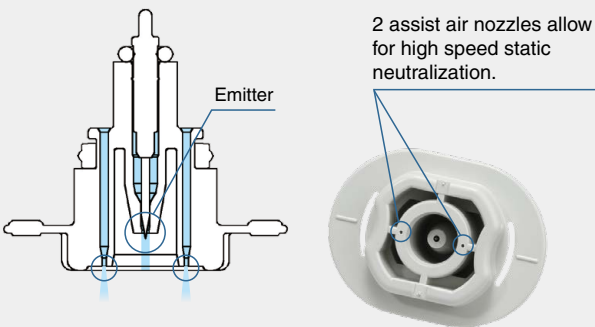

#### Energy saving static neutralization cartridge



##### Short range static neutralization

Reducing the number of assist nozzles by half for static neutralization, which does not require a high volume of assist air due to the close distance to the object to be neutralized, allows for energy savings by reducing air consumption.

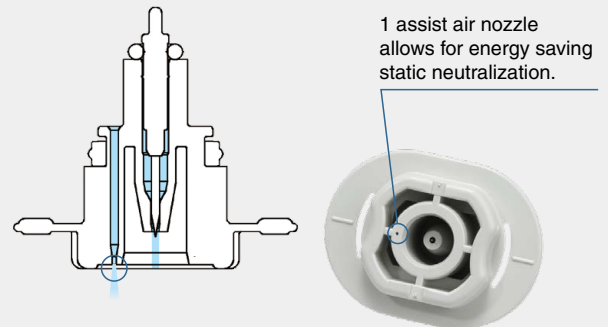

For Bar

For Nozzle

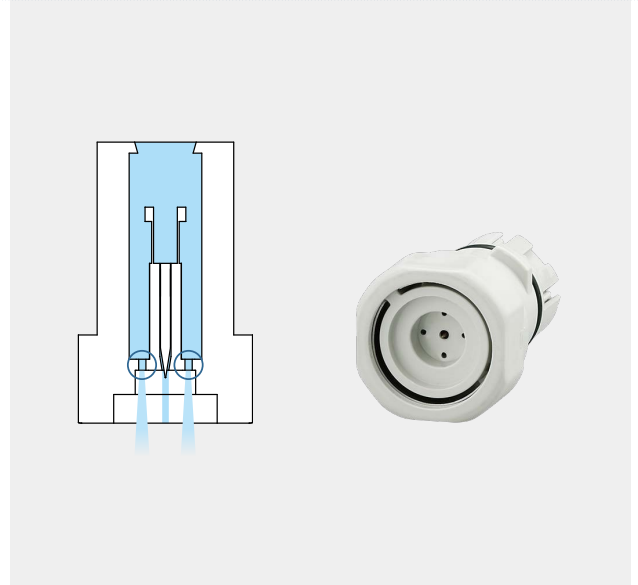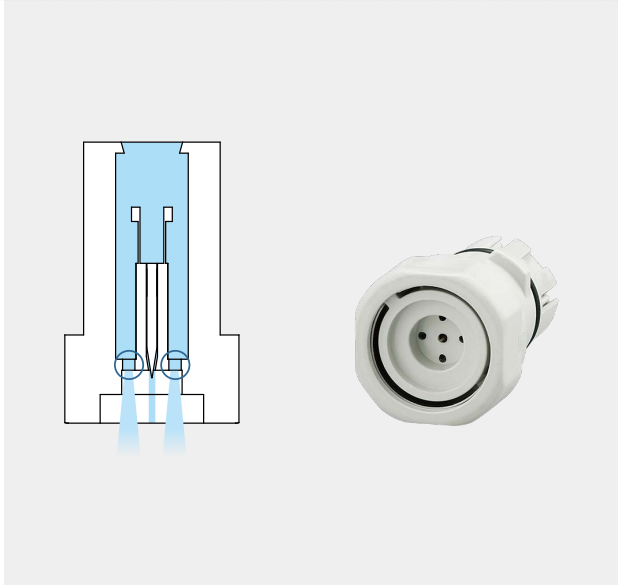

<For Nozzle> The external shape of the high speed static neutralization cartridge and that of the energy saving static neutralization cartridge is the same. However, as shown in the image above, the diameter of the holes differs.

● Emitter material type

Tungsten/Single crystal silicon (for silicon wafers)



Tungsten  
(Emitter cartridge color: White)


Silicon  
(Emitter cartridge color: Gray)



Tungsten  
(Emitter cartridge color: White)


Energy saving high-efficiency cartridge

Assist air amplified by the sucking in of ambient air (the ejector effect) allows for highly efficient static neutralization through the efficient transfer of the produced ionized air.

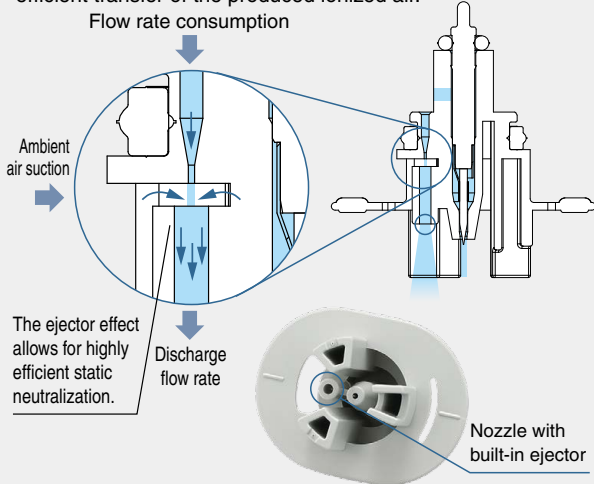


Flow rate for installation distance of each cartridge

Conditions: IZT41-112□ (Number of cartridges: 18 pcs.), Discharge time 1 s

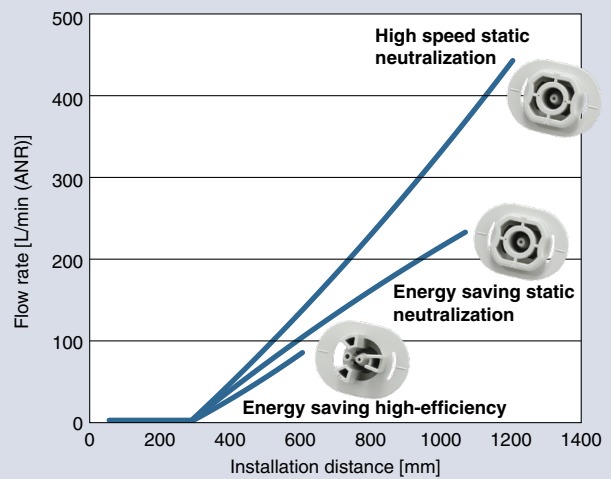

Flow rate for installation distance of each cartridge


Discharge time 1 s

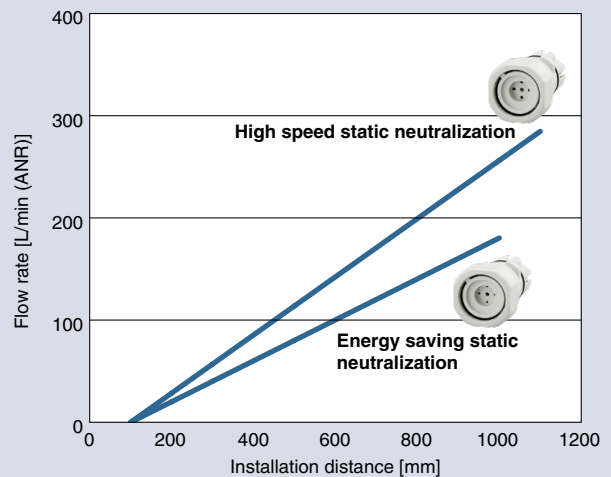

**Air can be supplied by air piping on one side.**


- The optimal design of the piping port size allows for sufficient blow performance even with piping only on one side.

- Piping on both sides
- Piping only on one side

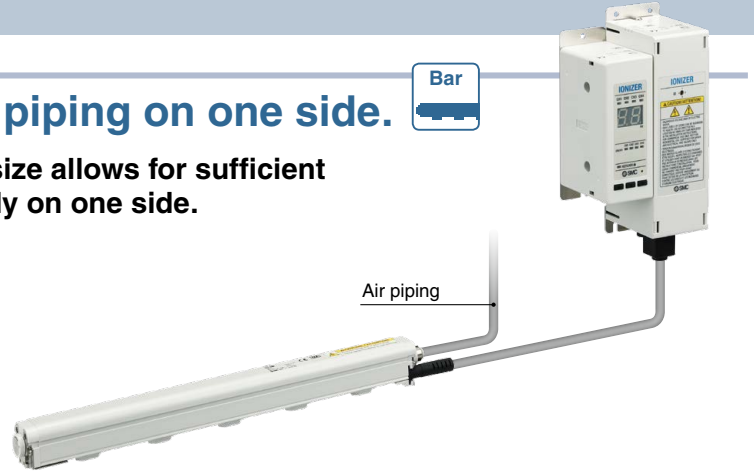


**High speed static neutralization cartridge**

2 assist air nozzles allow for high speed static neutralization.

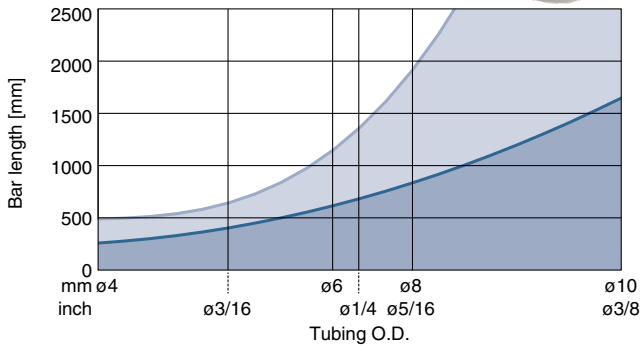


**Energy saving static neutralization cartridge**

1 assist air nozzle allows for energy saving static neutralization.

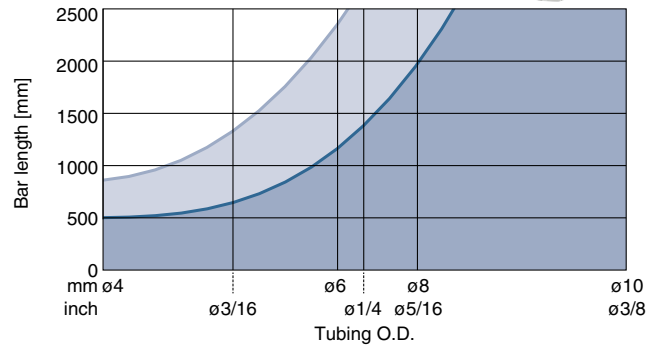


**Energy saving high-efficiency cartridge**

Nozzle with built-in ejector

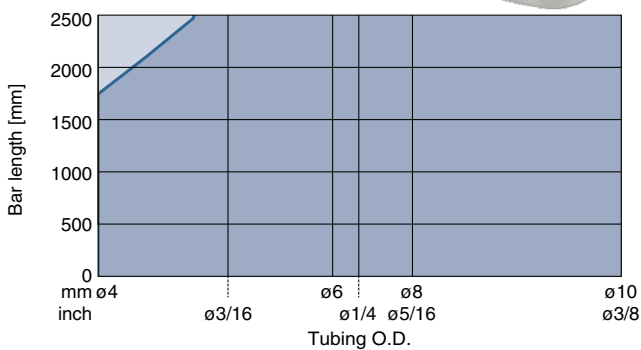


**Air supply port position is selectable: Right side/Left side/Both sides**



**Bar and high voltage cable lengths are selectable.**

pp. 21, 25, 43

Bar length: Select a length in 60 mm increments from 160 to 2500 mm. (Includes made-to-order options)

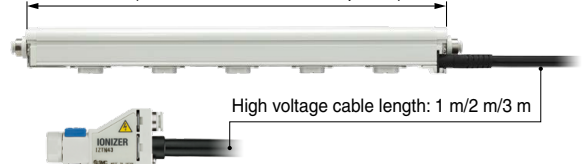

High voltage cable length: 1 m/2 m/3 m





## 2 types of brackets are available.




### For the bar type

When an adjustable mounting angle is required/Bracket 1

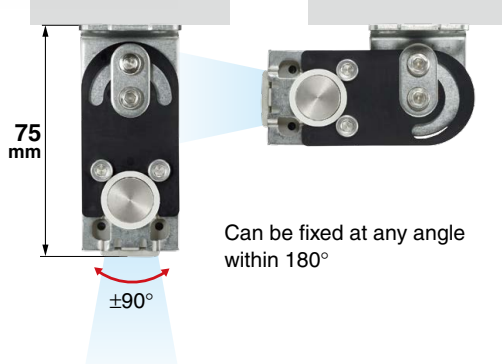
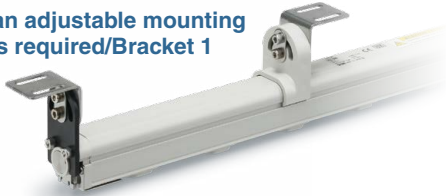


When space reduction is required/Bracket 2

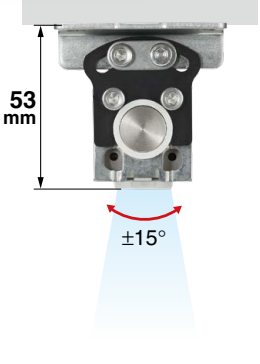


### For the nozzle type

Angle adjustment bracket

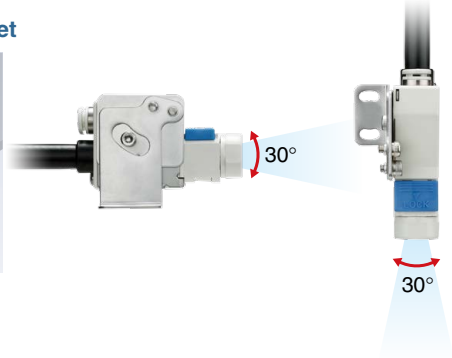

L-bracket




## Emitter cartridge drop prevention




Emitter cartridge drop prevention function

Double-action locking

Bar type

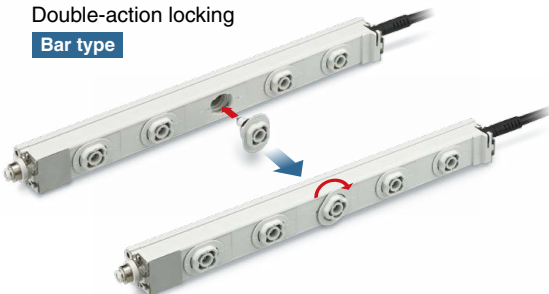


Nozzle type

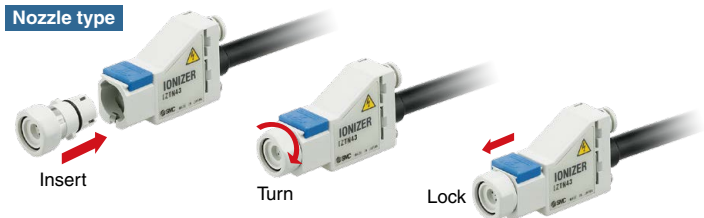






Drop prevention cover **Made to order**

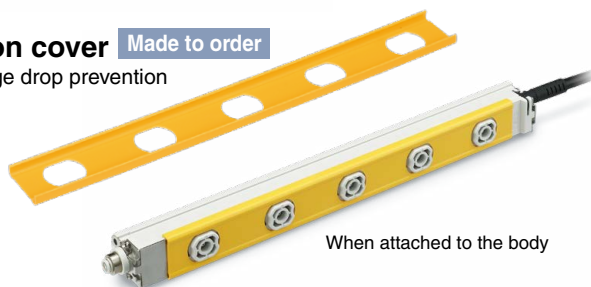For increased cartridge drop prevention

\* Only for the bar type






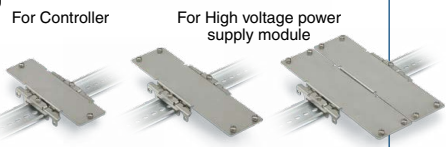










## <Models and Functions>

| Series  |                                     |  | IZT42                        | IZT41                        | IZT40                        | IZT43           |
|---|-------------------------------------|--|------------------------------|------------------------------|------------------------------|-----------------|
| Method of applying voltage  |                                     |  | Dual AC                      | AC, DC*1                     | AC, DC*1                     | AC, DC*1        |
| Auto balance  |                                     |  | ●                            | ●                            | —                            | ●               |
| I/O   |                                     |  | ●                            | ●                            | —                            | ●               |
| Ion balance display   |                                     |  | ●                            | ●                            | —                            | ●               |
| High voltage abnormality detection  |                                     |  | ●                            | ●                            | ●                            | ●               |
| Maintenance detection   |                                     |  | ●                            | ●                            | —                            | ●               |
| Low maintenance emitter   |                                     |  | ●                            | ●                            | ●                            | ●               |
| Emitter cartridge   | High speed static neutralization    | For Bar     | ●                            | ●                            | ●                            | —               |
|   |                                     | For Nozzle  | —                            | —                            | —                            | ●               |
|   | Energy saving static neutralization | For Bar     | ●                            | ●                            | ●                            | —               |
|   |                                     | For Nozzle  | —                            | —                            | —                            | ●               |
|   | Energy saving high-efficiency       | For Bar     | ●                            | ●                            | ●                            | —               |
|   | One-touch fitting                   | Metric size  |                              | ø4, ø6, ø8, ø10              | ø4, ø6, ø8, ø10              | ø4, ø6, ø8, ø10 |
| Inch size   |                                     |  | ø3/16", ø1/4", ø5/16", ø3/8" | ø3/16", ø1/4", ø5/16", ø3/8" | ø3/16", ø1/4", ø5/16", ø3/8" | ø1/4"           |
| Bracket mounting  |                                     |  | ●                            | ●                            | ●                            | ●               |
| <b>Made to order</b> <span style="background-color: #333; color: white; padding: 2px;">p. 25</span> <ul style="list-style-type: none"> <li>• Non-standard bar length (-X10)</li> <li>• Model with emitter cartridge drop prevention cover (-X14)</li> </ul> |                                     |  | ●                            | ●                            | ●                            | —               |


\*1 Apply cathode or anode to DC.

**<Accessories (for Individual Parts)>**

| Series            |  | IZT42            | IZT41            | IZT40 | IZT43    |      |         |   |   |   |   |
|-------------------|--|------------------|------------------|-------|----------|------|---------|---|---|---|---|
| Emitter cartridge | <p>For Bar<br/>High speed static neutralization    Energy saving static neutralization    Energy saving high-efficiency</p>  <table border="1" style="margin-top: 5px;"> <tr> <th>Cartridge color</th> <th>Emitter material</th> </tr> <tr> <td>White</td> <td>Tungsten</td> </tr> <tr> <td>Gray</td> <td>Silicon</td> </tr> </table> | Cartridge color  | Emitter material | White | Tungsten | Gray | Silicon | ● | ● | ● | — |
|                   | Cartridge color  | Emitter material |                  |       |          |      |         |   |   |   |   |
| White             | Tungsten   |                  |                  |       |          |      |         |   |   |   |   |
| Gray              | Silicon  |                  |                  |       |          |      |         |   |   |   |   |
| pp. 28, 46        | <p>For Nozzle</p>  <p>Tungsten (Color: White)</p>   | —                | —                | —     | ●        |      |         |   |   |   |   |
| Bracket           | <p>For Bar</p>    | ●                | ●                | ●     | —        |      |         |   |   |   |   |
|                   | <p>For Nozzle</p>    | —                | —                | —     | ●        |      |         |   |   |   |   |
| pp. 28, 46        | <p>Power supply cable</p>   | ●                | ●                | ●     | ●        |      |         |   |   |   |   |
| pp. 28, 46        | <p>DIN rail mounting bracket for controller and high voltage power supply module</p>  <p>For Controller    For High voltage power supply module</p> <p>IZT40, 41, 43    For IZT42</p>   | ●                | ●                | ●     | ●        |      |         |   |   |   |   |
| pp. 28, 46        | <p>High voltage cable holder</p>    | ●                | ●                | ●     | ●        |      |         |   |   |   |   |
| pp. 28, 46        | <p>Drop prevention cover (Only for the bar type)</p>    | ●                | ●                | ●     | —        |      |         |   |   |   |   |
| p. 29             | <p>AC adapter (Only for use with 1 ionizer bar/nozzle)</p>    | ●                | ●                | ●     | ●        |      |         |   |   |   |   |
| pp. 29, 47        | <p>Separate cable</p>   | ●                | ●                | ●     | ●        |      |         |   |   |   |   |
| pp. 29, 47        | <p>Cleaning kit</p> <p>For Bar</p>    | ●                | ●                | ●     | —        |      |         |   |   |   |   |
| pp. 29, 47        | <p>For Nozzle</p>   | —                | —                | —     | ●        |      |         |   |   |   |   |
| pp. 29, 47        | <p>High voltage cable assembly (For Nozzle)</p>   | —                | —                | —     | ●        |      |         |   |   |   |   |
| pp. 47            | <p>Body assembly (For Nozzle)</p>   | —                | —                | —     | ●        |      |         |   |   |   |   |


## <Application Examples: Bar Type>

For the static neutralization of resin frames

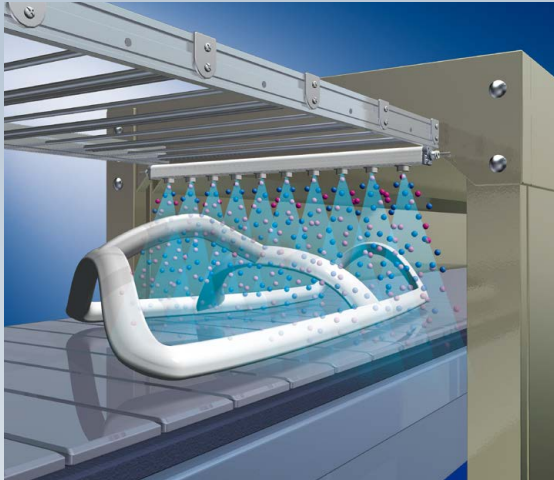


For the static neutralization of film-molded goods

- Prevents goods from adhering to the conveyer
- Prevents the dispersion of finished goods

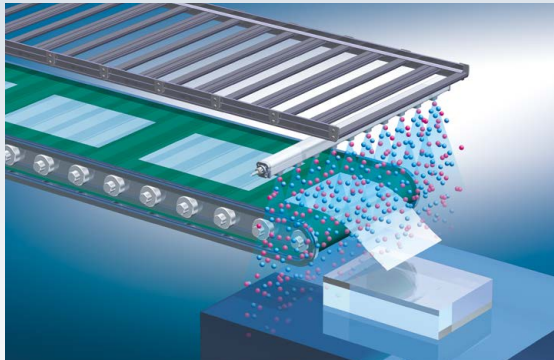



For the static neutralization of packing films

- Prevents the filled substances from adhering to packing films
- Reduces packing mistakes

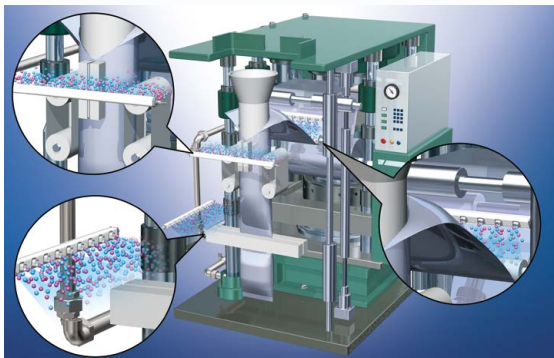


For the static neutralization of glass substrates

- Prevents the breakage of glass substrates by the static electricity generated when the substrate is lifted from the surface plate

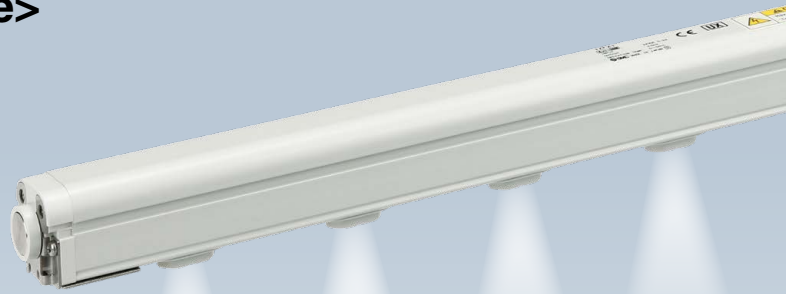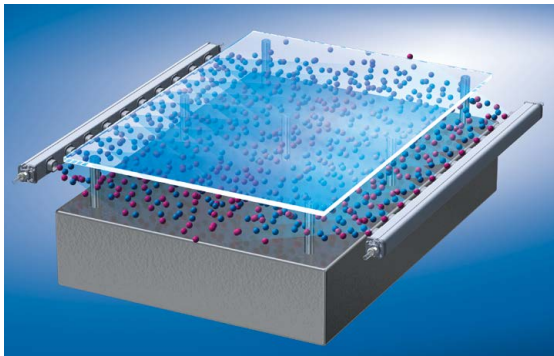


For the static neutralization of substrate cutting machines

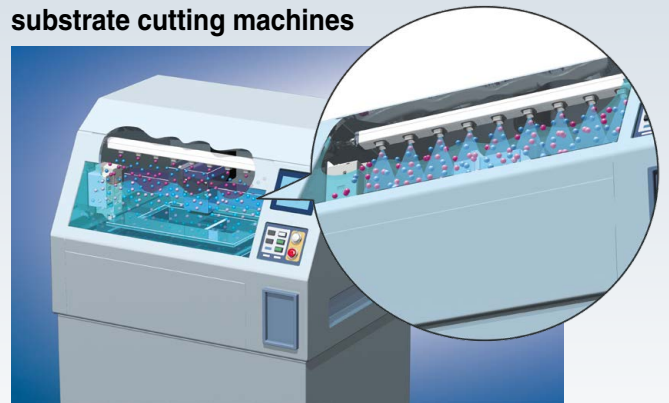


For the static neutralization during wafer transfer

- Prevents breakage due to discharge between wafers and hands

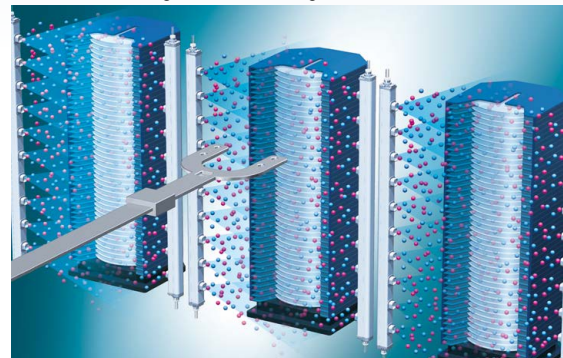

For the static neutralization of lenses


- Removes dust from lenses
- Prevents the adhesion of dust

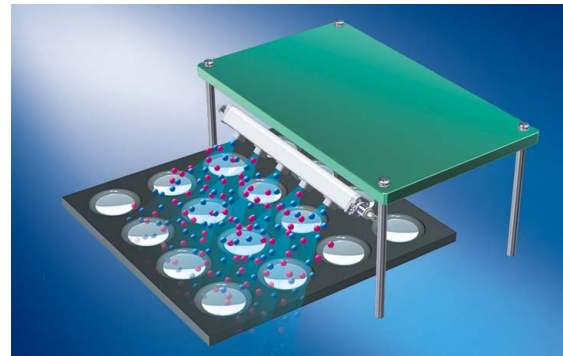

## <Application Examples: Nozzle Type>


### For the static neutralization of caps

- Removes dust from caps and prevents the adhesion of dust

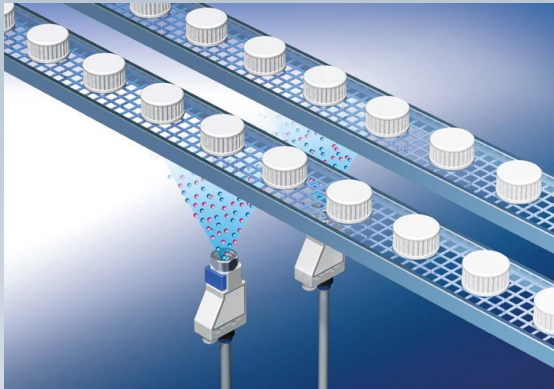


### For the static neutralization of films

- Prevents the adhesion of dust
- Prevents winding failure due to wrinkles, etc.

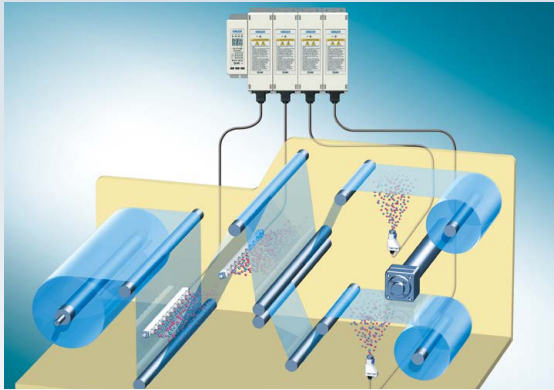


### For spot type static neutralization

- Prevents the electrostatic breakdown of electric parts
- Prevents detachment failure

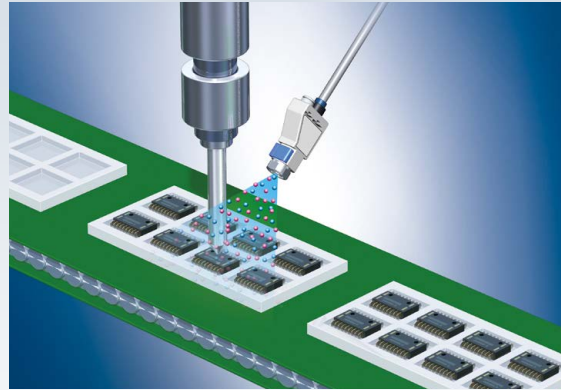


### For the static neutralization of parts feeders

- Prevents the clogging of parts feeders

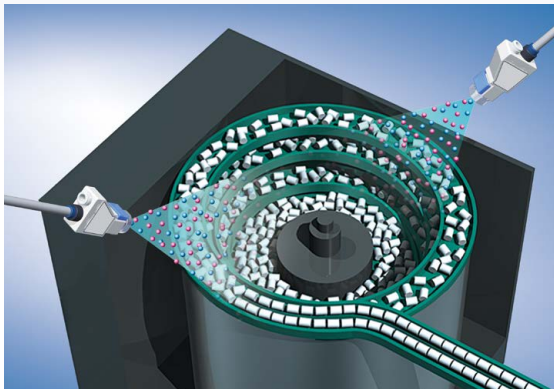


### For the static neutralization of electric substrates

- Prevents the electrostatic breakdown of electric parts

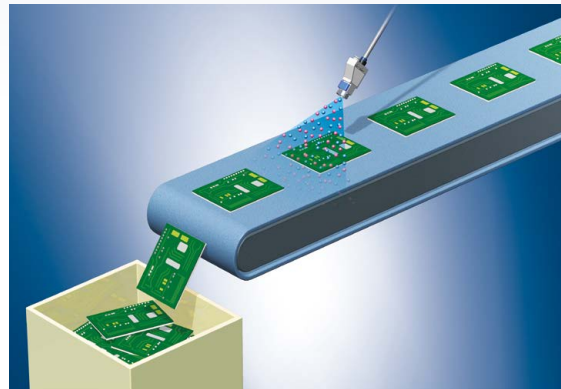


### For the removal of dust when detaching from film

- Removes dust generated by static electricity when detaching from film

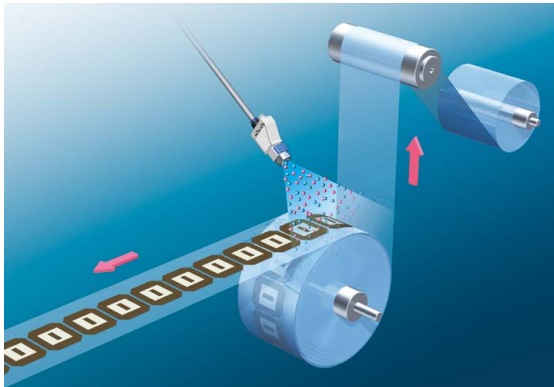

### For the prevention of punching press sticking

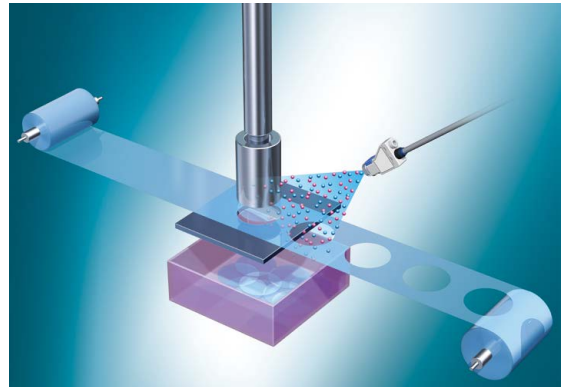





# CONTENTS

## Separate Controller Bar Type/Nozzle Type Ionizer IZT40/41/42/43 Series


Dual AC Type  
IZT42 Series

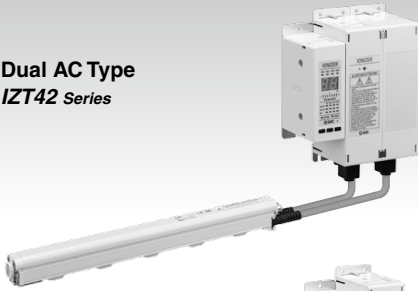

AC Type  
IZT41 Series

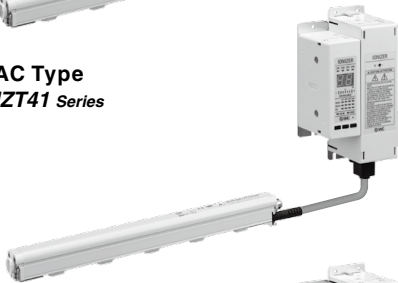

Standard Type  
IZT40 Series

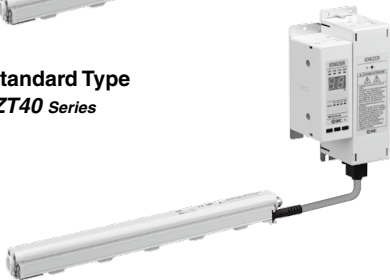

AC Type  
IZT43 Series



### Separate Controller Bar Type Ionizer IZT40/41/42 Series

|  |       |
|--|-------|
| Technical Data: Static Neutralization Characteristics                  |       |
| ① Installation Distance and Discharge Time                             | p. 15 |
| ② Static Neutralization Range  | p. 16 |
| ③ Potential Amplitude  | p. 19 |
| ④ Pressure — Flow Rate Characteristics                                 | p. 20 |
| How to Order   |       |
| Bar + High Voltage Power Supply Module + Controller                    | p. 21 |
| For Individual Parts (Bar/High Voltage Power Supply Module/Controller) | p. 23 |
| Made to Order  | p. 25 |
| Specifications   | p. 26 |
| Construction   | p. 27 |
| Accessories (for Individual Parts)                                     | p. 28 |
| Accessories Sold Separately  | p. 29 |
| Wiring: IZT40, 41, 42  | p. 30 |
| Wiring Circuit: IZT40  | p. 30 |
| Wiring Circuit: IZT41, 42  | p. 31 |
| Dimensions   |       |
| IZT40, 41  | p. 32 |
| IZT42  | p. 34 |
| Controller   | p. 35 |
| High Voltage Power Supply Module                                       | p. 36 |
| Cable  | p. 38 |

### Separate Controller Nozzle Type Ionizer IZT43 Series

|   |       |
|---|-------|
| Technical Data: Static Neutralization Characteristics                     |       |
| ① Installation Distance and Discharge Time                                | p. 41 |
| ② Static Neutralization Range   | p. 41 |
| ③ Pressure — Flow Rate Characteristics                                    | p. 42 |
| How to Order  |       |
| Nozzle + High Voltage Power Supply Module + Controller                    | p. 43 |
| For Individual Parts (Nozzle/High Voltage Power Supply Module/Controller) | p. 44 |
| Specifications  | p. 45 |
| Construction  | p. 45 |
| Accessories (for Individual Parts)  | p. 46 |
| Accessories Sold Separately   | p. 47 |
| Wiring: IZT43   | p. 48 |
| Wiring Circuit: IZT43   | p. 49 |
| Dimensions  |       |
| IZT43   | p. 50 |
| Controller  | p. 52 |
| High Voltage Power Supply Module  | p. 53 |
| Cable   | p. 54 |
| Glossary  | p. 56 |
| Specific Product Precautions  | p. 57 |

# IZT40/41/42 Series Technical Data

## Static Neutralization Characteristics



\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ① Installation Distance and Discharge Time (Discharge Time from 1000 V to 100 V)



#### IZT40, 41 AC Mode

#### IZT42 Dual AC Mode



For cartridges without air purge

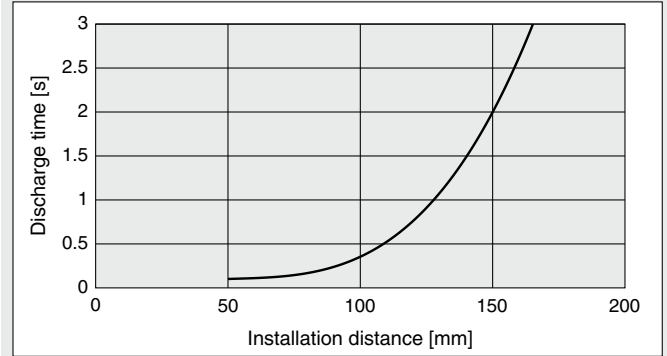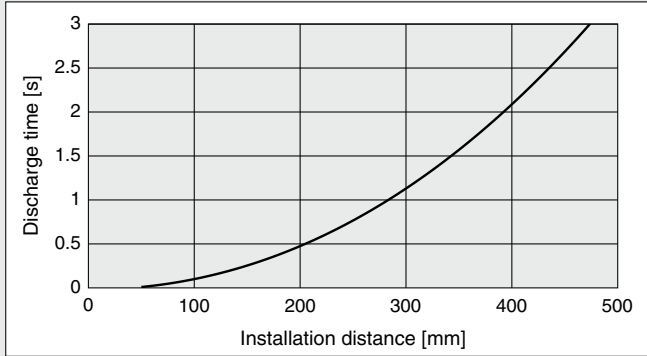



High speed static neutralization cartridge

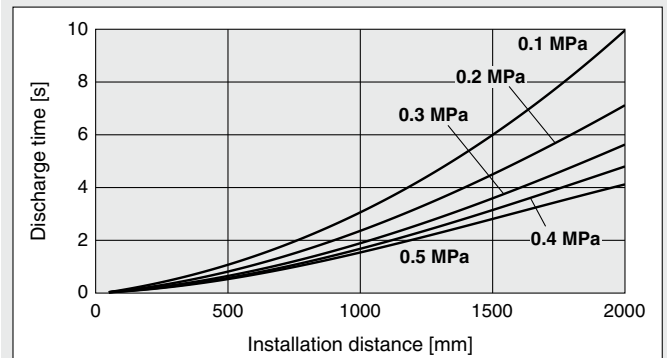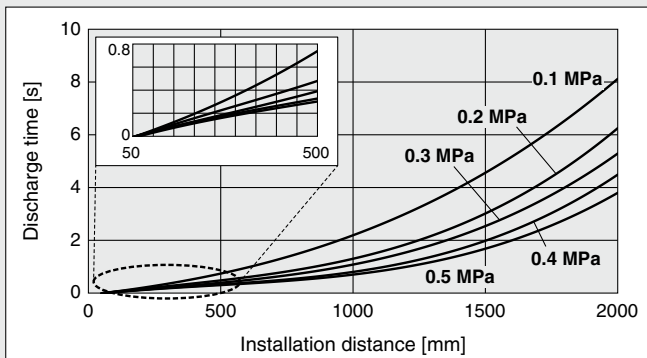

Energy saving static neutralization cartridge

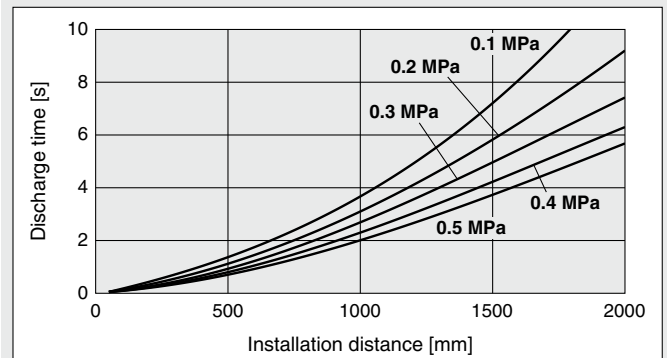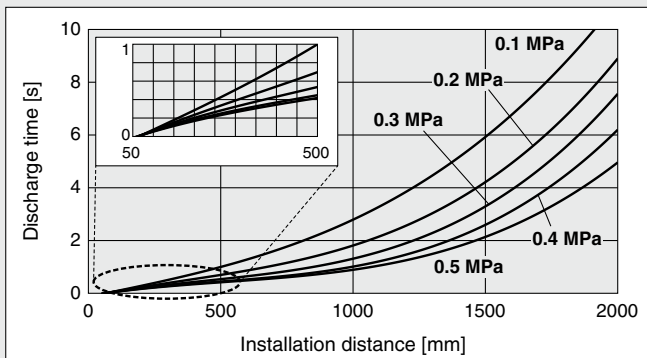

Energy saving high-efficiency cartridge

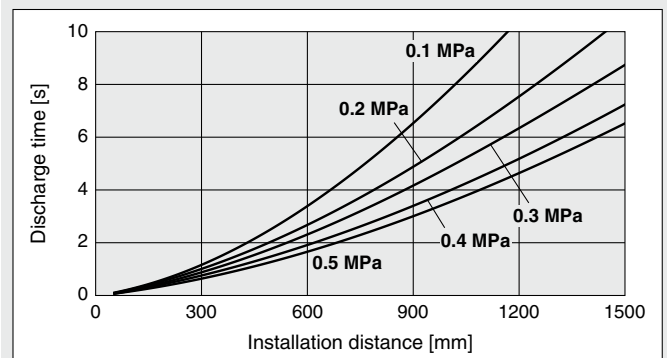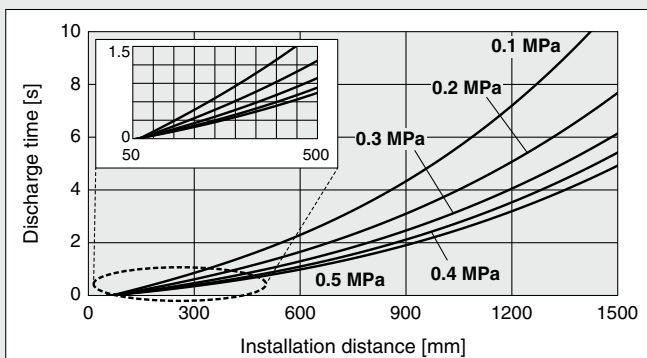



## Static Neutralization Characteristics



\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ② Static Neutralization Range (Discharge Time from 1000 V to 100 V)

#### IZT40, 41 Ion Generation Frequency: 30 Hz



##### 1) For cartridges without air purge

For IZT40-□D, L, V  
For IZT41-□D, L, V

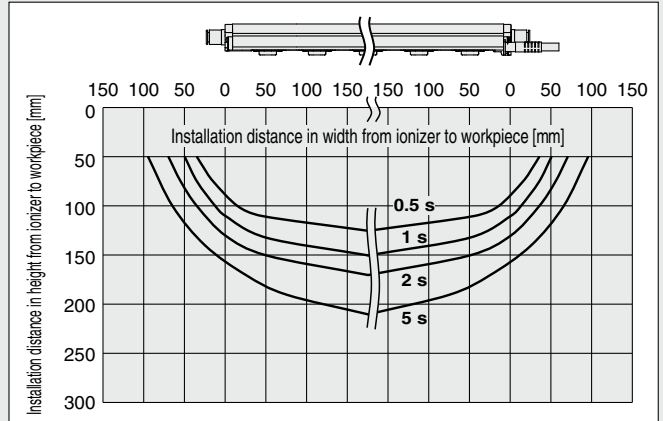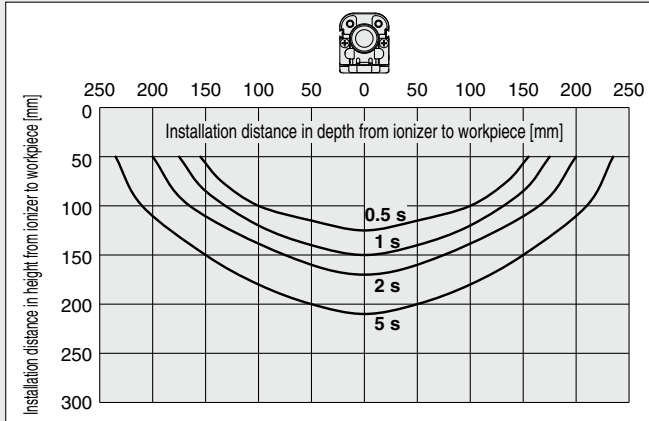



##### 2) High speed static neutralization cartridge, Supply pressure: 0.3 MPa

For IZT40-□D  
For IZT41-□D

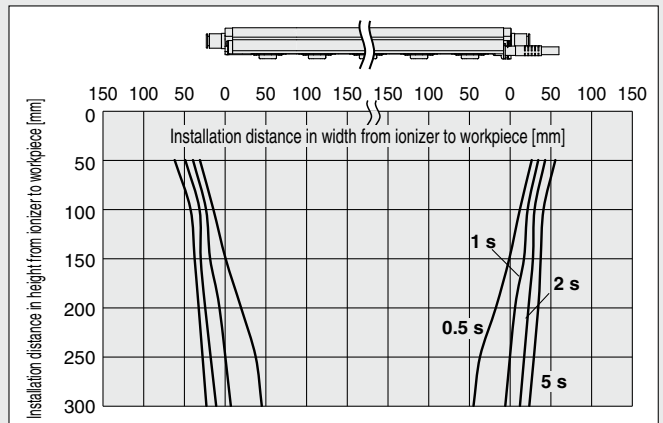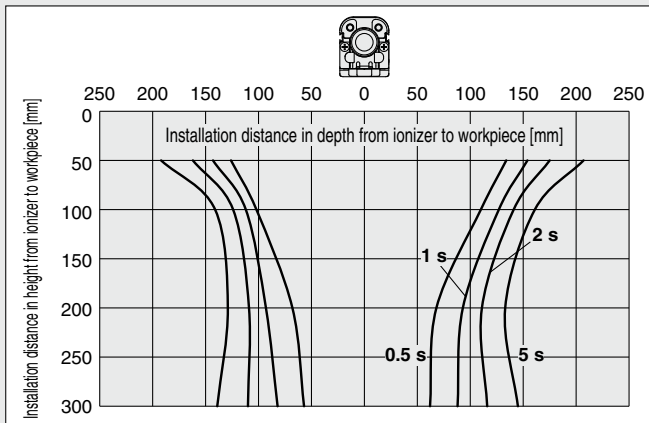

##### 3) Energy saving static neutralization cartridge, Supply pressure: 0.3 MPa

For IZT40-□L  
For IZT41-□L

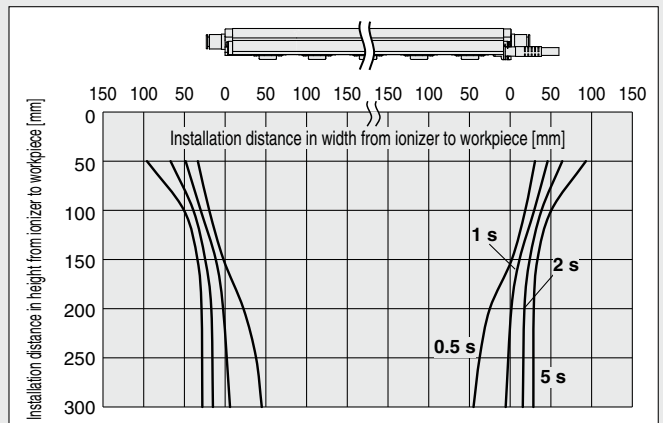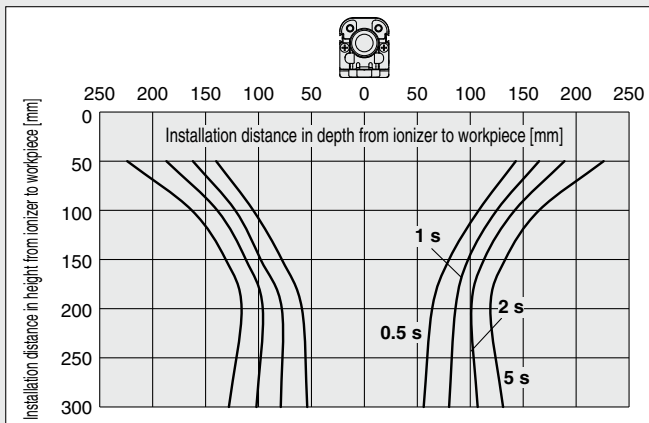

# IZT40/41/42 Series

## Static Neutralization Characteristics

\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.



### ② Static Neutralization Range (Discharge Time from 1000 V to 100 V)

#### IZT40, 41 Ion Generation Frequency: 30 Hz

##### 4) Energy saving high-efficiency cartridge, Supply pressure: 0.3 MPa

For IZT40-□V



For IZT41-□V

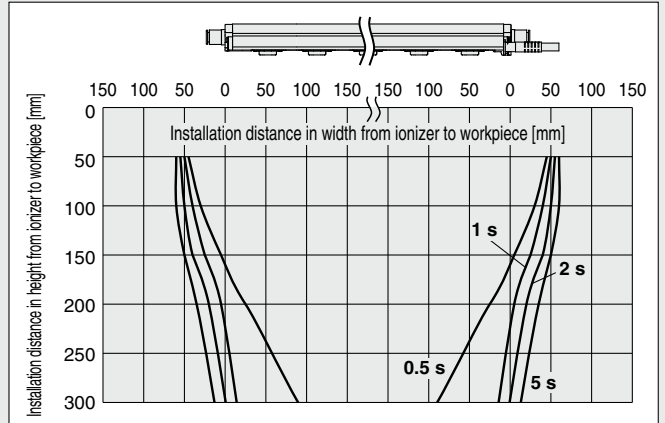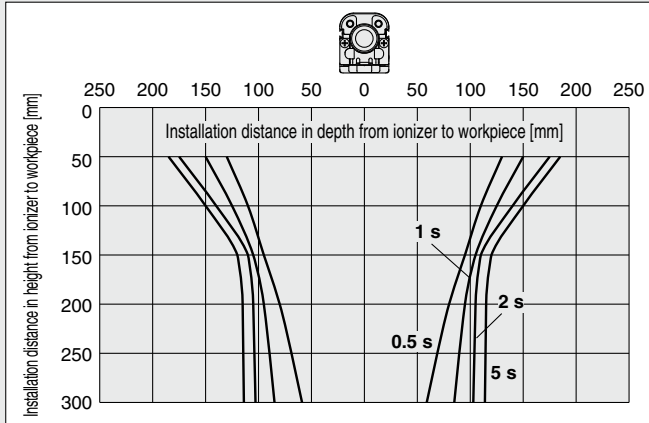

#### IZT42 Ion Generation Frequency: 30 Hz



##### 1) For cartridges without air purge

For IZT42-□D, L, V

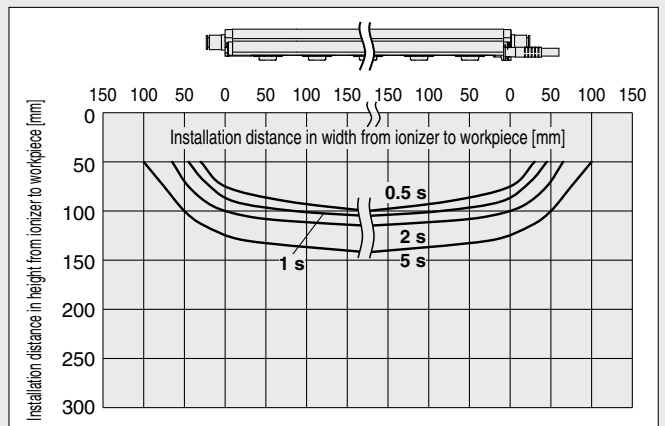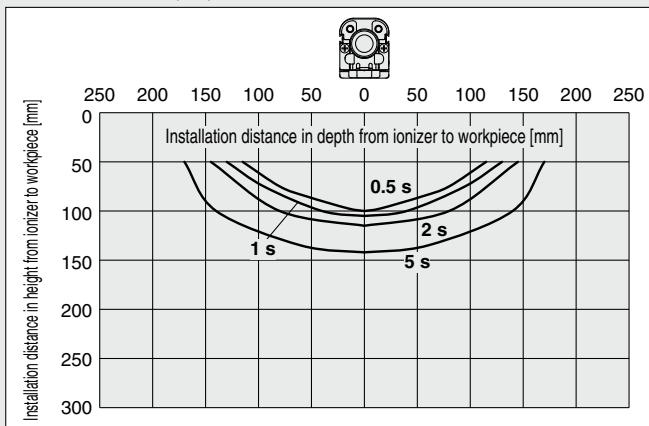

##### 2) High speed static neutralization cartridge, Supply pressure: 0.3 MPa

For IZT42-□D

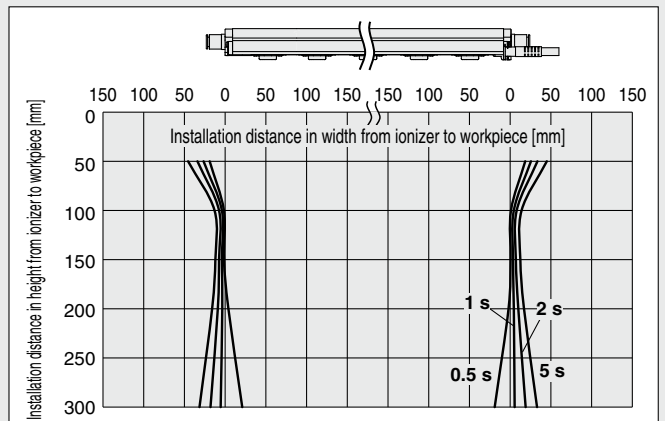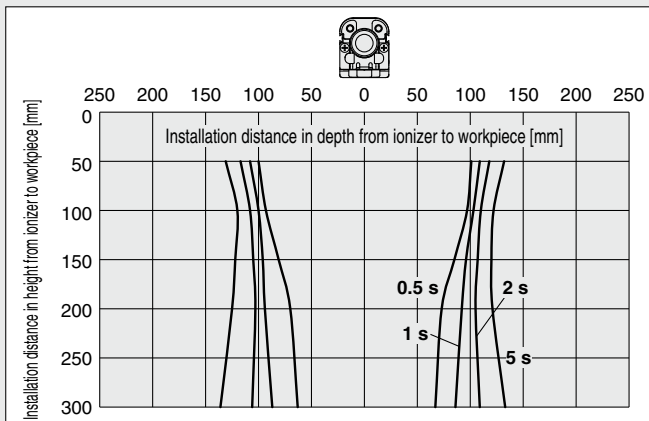

## Static Neutralization Characteristics



\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ② Static Neutralization Range (Discharge Time from 1000 V to 100 V)

#### IZT42 Ion Generation Frequency: 30 Hz



##### 3) Energy saving static neutralization cartridge, Supply pressure: 0.3 MPa

###### For IZT42-□L

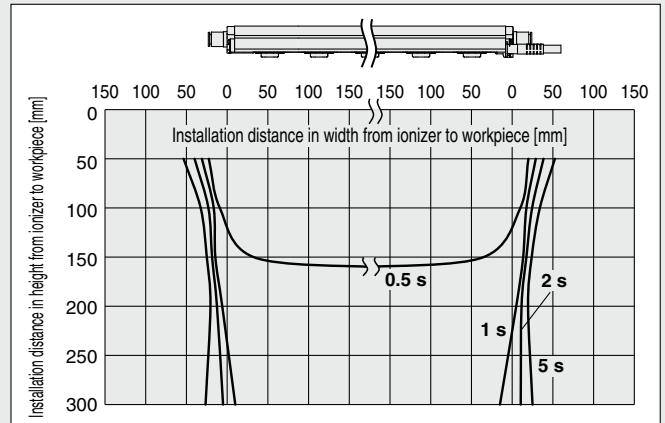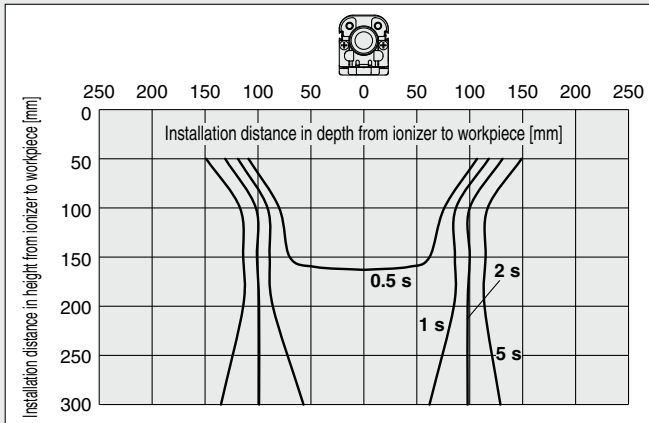

##### 4) Energy saving high-efficiency cartridge, Supply pressure: 0.3 MPa

###### For IZT42-□V

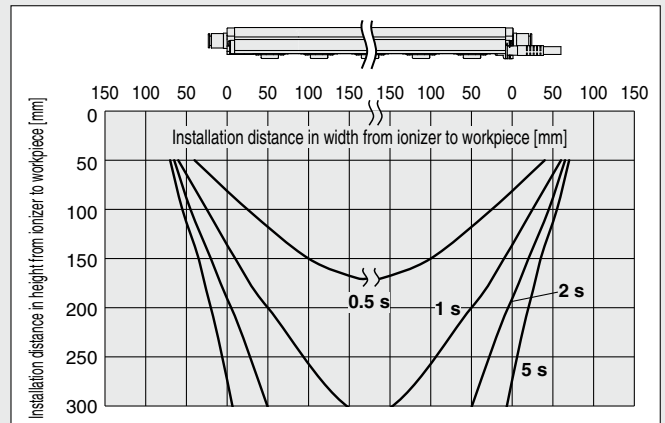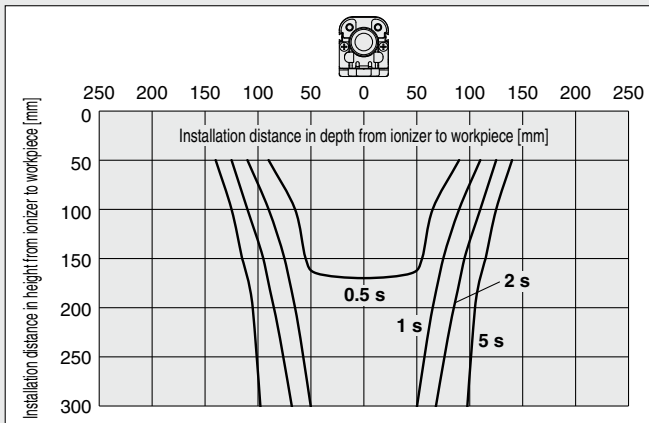

# IZT40/41/42 Series

## Static Neutralization Characteristics

\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ③ Potential Amplitude



#### IZT40, 41 Supply Pressure: 0.3 MPa

#### IZT42 Supply Pressure: 0.3 MPa

##### High speed static neutralization cartridge

For IZT40-112D  
For IZT41-112D



For IZT42-112D

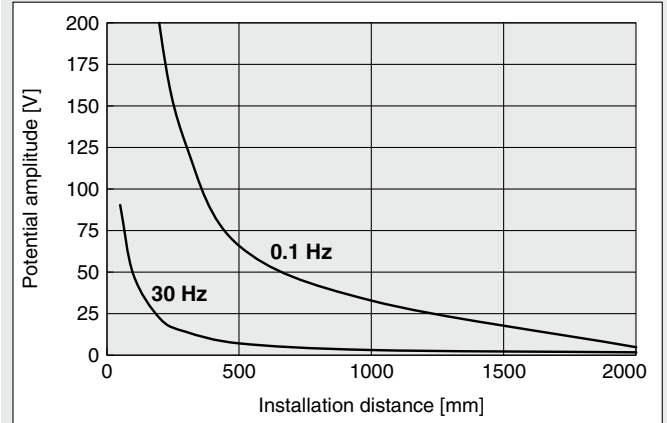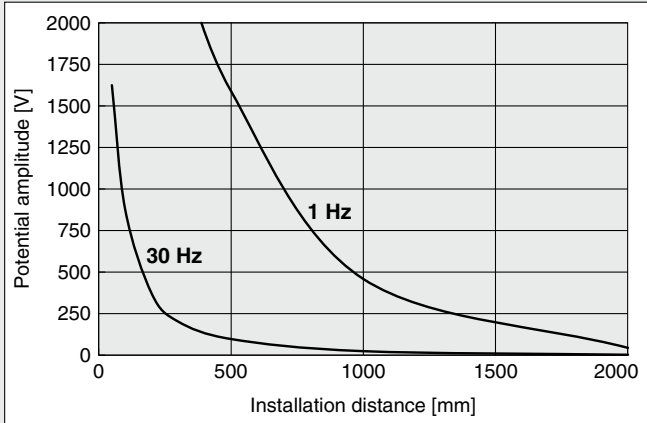

##### Energy saving static neutralization cartridge

For IZT40-112L  
For IZT41-112L



For IZT42-112L

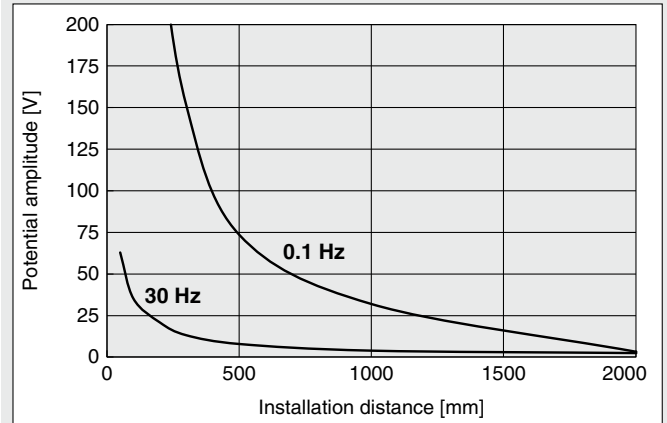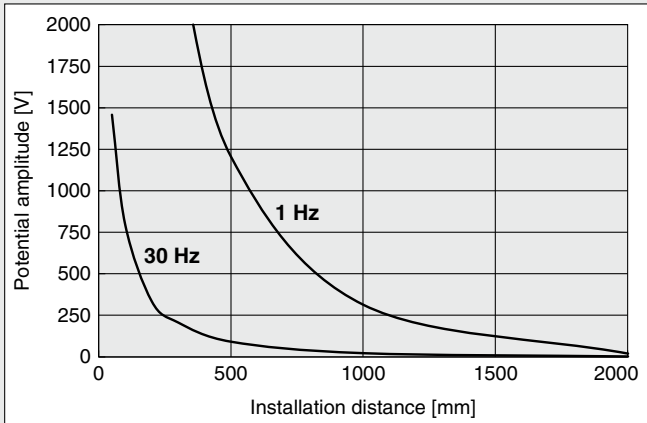

##### Energy saving high-efficiency cartridge

For IZT40-112V  
For IZT41-112V

For IZT42-112V

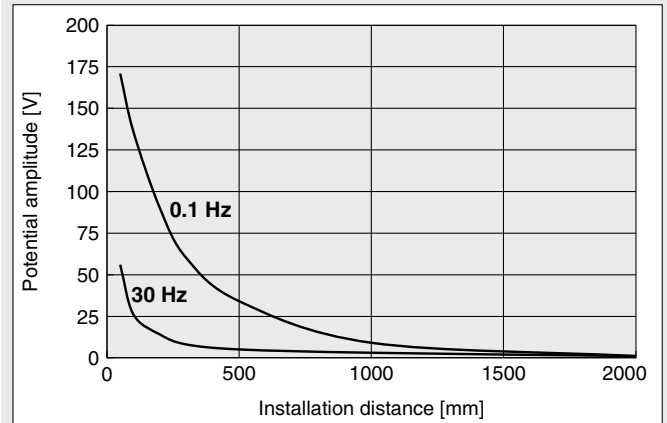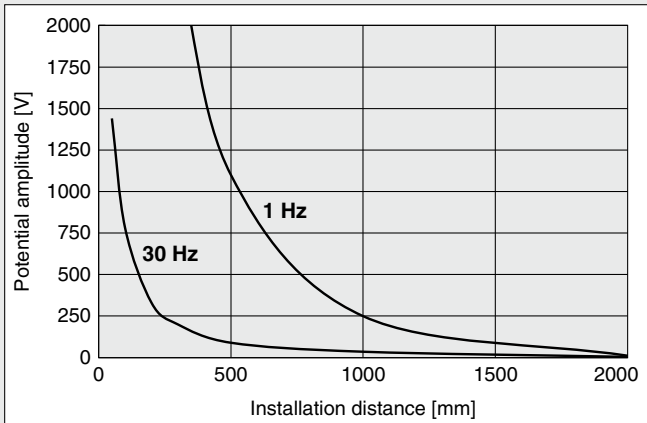


## Static Neutralization Characteristics


\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ④ Pressure — Flow Rate Characteristics


High speed static neutralization cartridge

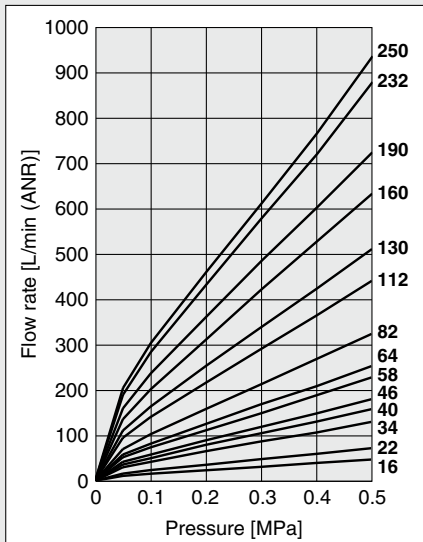

Energy saving static neutralization cartridge

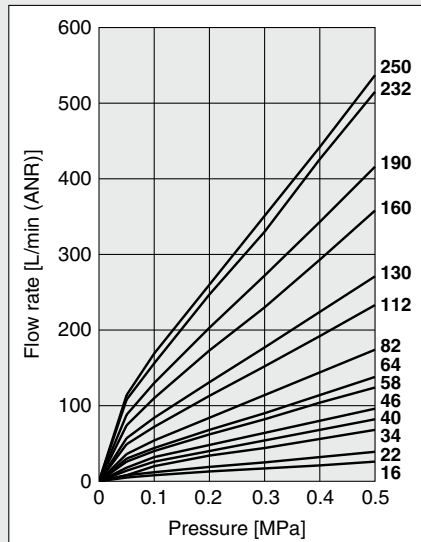


Energy saving high-efficiency cartridge

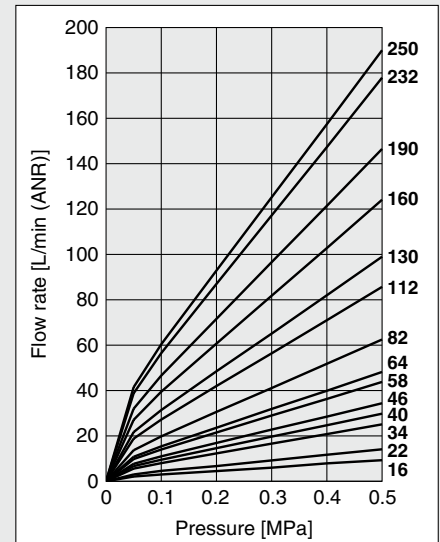

## How to measure


### a) Air supply from one side

- IZT40
- IZT41 -16, 22, 34, 40, 46, 58    Connecting tube: O.D.  $\varnothing 6$  x I.D.  $\varnothing 4$
- IZT42

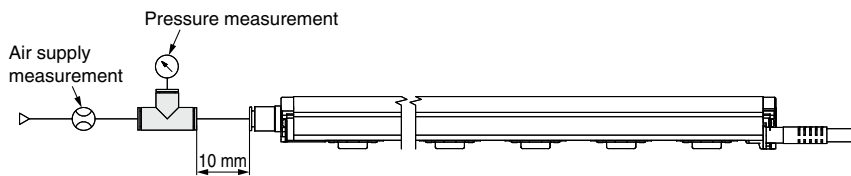

### b) Air supply from both sides

- IZT40
- IZT41 -64, 82, 112    Connecting tube: O.D.  $\varnothing 6$  x I.D.  $\varnothing 4$
- IZT42
- IZT40
- IZT41 -130, 160, 190    Connecting tube: O.D.  $\varnothing 8$  x I.D.  $\varnothing 5$
- IZT42
- IZT40
- IZT41 -232, 250    Connecting tube: O.D.  $\varnothing 10$  x I.D.  $\varnothing 6.5$
- IZT42

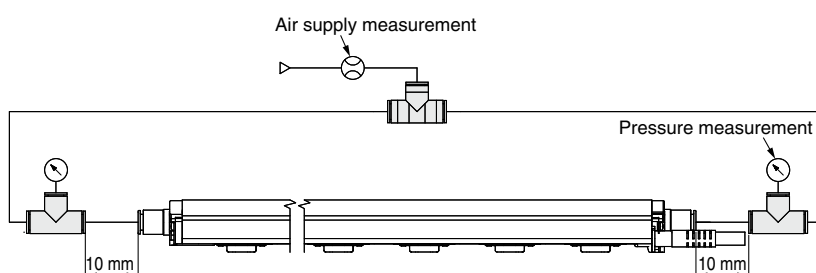

# Separate Controller


## Bar Type Ionizer

# IZT40/41/42 Series



### How to Order

**Bar** + **High voltage power supply module** + **Controller**

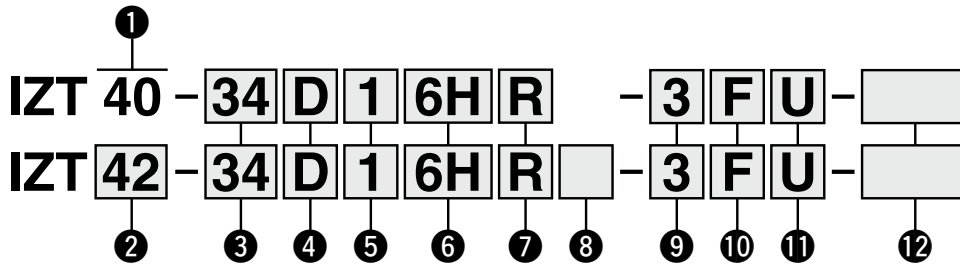

#### 1 Model

| Symbol | Model         |
|--------|---------------|
| 40     | Standard type |

#### 2 Model

| Symbol | Model        |
|--------|--------------|
| 41     | AC type      |
| 42     | Dual AC type |

#### 3 Bar length

| Symbol | Length [mm] | Symbol | Length [mm] |
|--------|-------------|--------|-------------|
| 16     | 160         | 82     | 820         |
| 22     | 220         | 112    | 1120        |
| 34     | 340         | 130    | 1300        |
| 40     | 400         | 160    | 1600        |
| 46     | 460         | 190    | 1900        |
| 58     | 580         | 232    | 2320        |
| 64     | 640         | 250    | 2500        |

#### 4 Emitter cartridge type/ Emitter material

| Symbol | Type  | Material |
|--------|---|----------|
| D      | High speed static neutralization cartridge    | Tungsten |
| E      | Energy saving static neutralization cartridge | Silicon  |
| L      | High speed static neutralization cartridge    | Tungsten |
| M      | Energy saving static neutralization cartridge | Silicon  |
| V      | High efficiency cartridge                     | Tungsten |
| S      | High efficiency cartridge                     | Silicon  |

#### 5 High voltage cable length

| Symbol | High voltage cable length [m] |
|--------|-------------------------------|
| 1      | 1                             |
| 2      | 2                             |
| 3      | 3                             |

\* The number of included high voltage cable holders differs depending on the high voltage cable length. (Refer to the table below.)

Number of included high voltage cable holders  
⇒ page 28

| Symbol | IZT40    |       | IZT41    |       | IZT42    |       |
|--------|----------|-------|----------|-------|----------|-------|
|        | Straight | Elbow | Straight | Elbow | Straight | Elbow |
| 1      | 1        | 1     | 1        | 1     | 2        | 2     |
| 2      | 2        | 1     | 2        | 1     | 4        | 2     |
| 3      | 3        | 1     | 3        | 1     | 6        | 2     |

#### 6 One-touch fitting

| Symbol | Metric size  |
|--------|--------------|
| 4H     | ø4 Straight  |
| 6H     | ø6 Straight  |
| 8H     | ø8 Straight  |
| AH     | ø10 Straight |
| 4L     | ø4 Elbow     |
| 6L     | ø6 Elbow     |
| 8L     | ø8 Elbow     |
| AL     | ø10 Elbow    |

| Symbol | Inch size       |
|--------|-----------------|
| 5H     | ø3/16" Straight |
| 7H     | ø1/4" Straight  |
| 9H     | ø5/16" Straight |
| BH     | ø3/8" Straight  |
| 5L     | ø3/16" Elbow    |
| 7L     | ø1/4" Elbow     |
| 9L     | ø5/16" Elbow    |
| BL     | ø3/8" Elbow     |

\* Refer to the recommended piping port size on the next page for selecting a One-touch fitting.

\* The position of the One-touch fitting and the plug cannot be changed after the delivery of the product.


#### 7 Plug position

| Symbol | Position                                |
|--------|---|
| Nil    | Without plug                            |
| Q      | High voltage cable side                 |
| R      | Opposite side of the high voltage cable |

#### 8 Input/Output

| Symbol | Input/Output |
|--------|--------------|
| Nil    | NPN          |
| P      | PNP          |

\* The input/output function cannot be used when the AC adapter is being used.

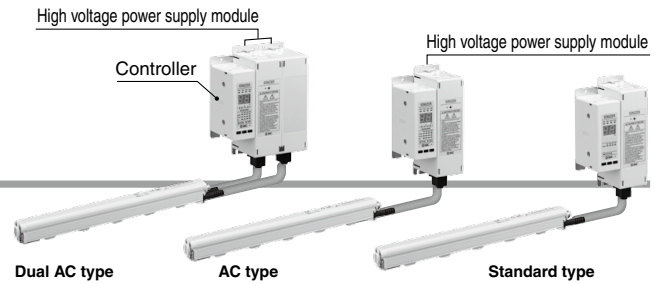

**9 Power supply cable length**

| Symbol | Length [m] |
|--------|------------|
| 3      | 3          |
| 5      | 5          |
| 10     | 10         |
| 15     | 15         |
| N      | None       |

\* To use an AC adapter, specify "N", and select the AC adapter sold separately.

**10 Bar bracket** ⇨ page 28

| Symbol | Type            |
|--------|-----------------|
| Nil    | Without bracket |
| B      | With bracket 1  |
| F      | With bracket 2  |

\* The number of intermediate brackets differs depending on the bar length. (Refer to the table below.)

**Number of brackets**

| Bar length [mm] | End bracket | Intermediate bracket |
|-----------------|-------------|----------------------|
| 160 to 760      | 2           | None                 |
| 820 to 1600     |             | 1                    |
| 1660 to 2380    |             | 2                    |
| 2440 to 2500    |             | 3                    |

**11 DIN rail mounting bracket for controller and high voltage power supply module** ⇨ page 28

| Symbol | For controller | For high voltage power supply module |
|--------|----------------|--------------------------------------|
| Nil    | None           | None                                 |
| U      | Included       | Included                             |
| W      | Included       | None                                 |
| Y      | None           | Included                             |

**12 Made to order** ⇨ page 25

| Symbol | Description                      |
|--------|----------------------------------|
| -X10   | Non-standard bar length          |
| -X14   | Model with drop prevention cover |

**Recommended piping port size for the IZT4□ High speed static neutralization cartridge**

| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ●   | ●   | ●   | —   | —   | —   | —    | —    | —    | —    | —    | —    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ●   | ●   | ●    | —    | —    | —    | —    | —    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |

○: With piping only on one side ●: With piping on both sides —: Unrecommended piping

**Energy saving static neutralization cartridge**

| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |

○: With piping only on one side ●: With piping on both sides —: Unrecommended piping

**Energy saving high-efficiency cartridge**



| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |

○: With piping only on one side ●: With piping on both sides

# IZT40/41/42 Series

## For Individual Parts

## How to Order

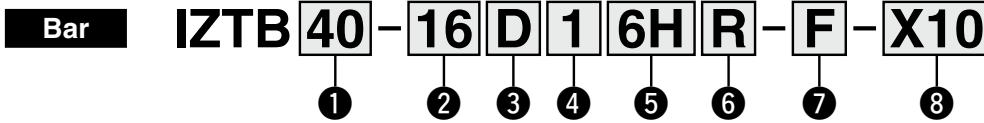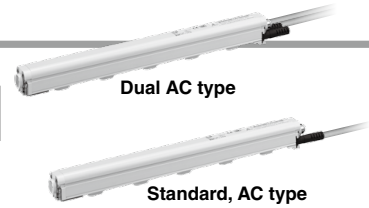

### 1 Model

| Symbol | Model  |
|--------|--|
| 40     | Standard type (For IZT40), AC type (For IZT41) |
| 42     | Dual AC type (For IZT42)                       |

### 2 Bar length

| Symbol | Length [mm] | Symbol | Length [mm] |
|--------|-------------|--------|-------------|
| 16     | 160         | 82     | 820         |
| 22     | 220         | 112    | 1120        |
| 34     | 340         | 130    | 1300        |
| 40     | 400         | 160    | 1600        |
| 46     | 460         | 190    | 1900        |
| 58     | 580         | 232    | 2320        |
| 64     | 640         | 250    | 2500        |

### 6 Plug position

| Symbol | Position                                |
|--------|---|
| Nil    | Without plug                            |
| Q      | High voltage cable side                 |
| R      | Opposite side of the high voltage cable |

### 7 Bar bracket ⇨ page 28

| Symbol | Type            |
|--------|-----------------|
| Nil    | Without bracket |
| B      | With bracket 1  |
| F      | With bracket 2  |

\* The number of intermediate brackets differs depending on the bar length. (Refer to the table below.)

#### Number of brackets

| Bar length   | End bracket | Intermediate bracket |
|--------------|-------------|----------------------|
| 160 to 760   | 2           | None                 |
| 820 to 1600  |             | 1                    |
| 1660 to 2380 |             | 2                    |
| 2440 to 2500 |             | 3                    |

### 8 Made to order ⇨ page 25

| Symbol | Description                      |
|--------|----------------------------------|
| -X10   | Non-standard bar length          |
| -X14   | Model with drop prevention cover |

### 3 Emitter cartridge type

| Symbol | Type  | Material |
|--------|---|----------|
| D      | High speed static neutralization cartridge    | Tungsten |
| E      |   | Silicon  |
| L      | Energy saving static neutralization cartridge | Tungsten |
| M      |   | Silicon  |
| V      | Energy saving high-efficiency cartridge       | Tungsten |
| S      |   | Silicon  |

### 4 High voltage cable length

| Symbol | High voltage cable length [m] |
|--------|-------------------------------|
| 1      | 1                             |
| 2      | 2                             |
| 3      | 3                             |

\* The number of included high voltage cable holders differs depending on the high voltage cable length. (Refer to the table below.)

#### Number of included high voltage cable holders

⇨ page 28

| Symbol | IZT40    |       | IZT41    |       | IZT42    |       |
|--------|----------|-------|----------|-------|----------|-------|
|        | Straight | Elbow | Straight | Elbow | Straight | Elbow |
| 1      | 1        | 1     | 1        | 1     | 2        | 2     |
| 2      | 2        | 1     | 2        | 1     | 4        | 2     |
| 3      | 3        | 1     | 3        | 1     | 6        | 2     |

### Recommended piping port size for the IZT4□

#### High speed static neutralization cartridge

| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ●   | ●   | ●   | —   | —   | —   | —    | —    | —    | —    | —    | —    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ●   | ●   | ●    | —    | —    | —    | —    | —    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ●    | ●    | ●    | ●    | —    | —    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ●    | ●    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |

○: With piping only on one side ●: With piping on both sides —: Unrecommended piping

#### Energy saving static neutralization cartridge

| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |

○: With piping only on one side ●: With piping on both sides —: Unrecommended piping

#### Energy saving high-efficiency cartridge

| One-touch fitting symbol | Applicable tubing O.D. | Bar length [mm] |     |     |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------|------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|                          |                        | 160             | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| 4H/4L                    | ø4 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 6H/6L                    | ø6 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 8H/8L                    | ø8 mm                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| AH/AL                    | ø10 mm                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 5H/5L                    | ø3/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 7H/7L                    | ø1/4"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| 9H/9L                    | ø5/16"                 | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |
| BH/BL                    | ø3/8"                  | ○               | ○   | ○   | ○   | ○   | ○   | ○   | ○   | ○    | ○    | ○    | ○    | ○    | ○    |


○: With piping only on one side ●: With piping on both sides



**Combinations**

|       | Bar/IZTB |    | High voltage power supply module/IZTP |    |    | Controller/IZTC |    |
|-------|----------|----|---------------------------------------|----|----|-----------------|----|
|       | 40       | 42 | 40                                    | 41 | 42 | 40              | 41 |
| IZT40 | ●        |    | ●                                     |    |    | ●               |    |
| IZT41 | ●        |    |                                       | ●  |    |                 | ●  |
| IZT42 |          | ●  |                                       |    | ●  |                 | ●  |

**High voltage power supply module**

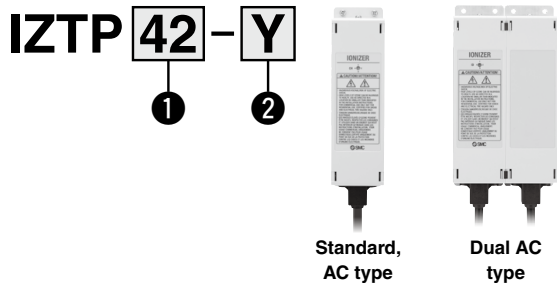


**1 Model**

| Symbol | Model                     |
|--------|---------------------------|
| 40     | Standard type (For IZT40) |
| 41     | AC type (For IZT41)       |
| 42     | Dual AC type (For IZT42)  |

**2 DIN rail mounting bracket** ⇨ page 28

| Symbol | Model    |
|--------|----------|
| Nil    | None     |
| Y      | Included |

**Controller**

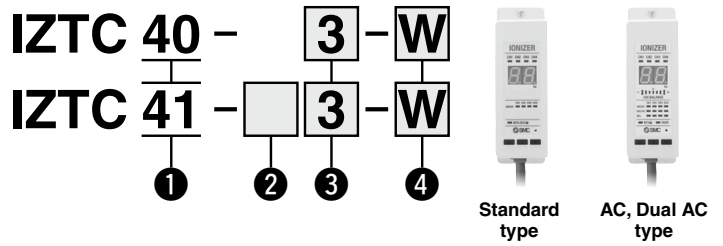

**1 Controller type**

| Symbol | Model  |
|--------|--|
| 40     | Standard type (For IZT40)                        |
| 41     | AC type (For IZT41),<br>Dual AC type (For IZT42) |

**2 Input/Output**

| Symbol | Input/Output |
|--------|--------------|
| Nil    | NPN          |
| P      | PNP          |

**3 Power supply cable length**

| Symbol | Length [m] |
|--------|------------|
| 3      | 3          |
| 5      | 5          |
| 10     | 10         |
| 15     | 15         |
| N      | None       |

**4 DIN rail mounting bracket** ⇨ page 28

| Symbol | Model    |
|--------|----------|
| Nil    | None     |
| W      | Included |

# IZT40/41/42 Series

## Made to Order

| Symbol | Description             | Specifications   |
|--------|-------------------------|--|
| -X10   | Non-standard bar length | Manufacturable bar length [mm]: 100 + 60 x n (n: Integer from 1 to 39)<br>(For n = 1, 2, 4, 5, 6, 8, 9, 12, 17, 20, 25, 30, and 37, use a standard model.) |

### Bar + High voltage power supply module + Controller

IZT 40 - 52 D 1 6H R - [ ] F [ ] - X10

IZT 42 - 52 D 1 6H R [ ] - [ ] F [ ] - X10

### Bar

IZT B 40 - 52 D 1 6H R - F - X10

Standard model number ⇨ pages 21, 22 and 23

#### Type


|      |
|------|
| 40   |
| 41*1 |
| 42   |

\*1 Only bar is ordered,  
41 cannot be selected.

#### Bar length

| Symbol | Bar length [mm] | Symbol | Bar length [mm] | Symbol | Bar length [mm] |
|--------|-----------------|--------|-----------------|--------|-----------------|
| 28     | 280             | 124    | 1240            | 196    | 1960            |
| 52     | 520             | 136    | 1360            | 202    | 2020            |
| 70     | 700             | 142    | 1420            | 208    | 2080            |
| 76     | 760             | 148    | 1480            | 214    | 2140            |
| 88     | 880             | 154    | 1540            | 220    | 2200            |
| 94     | 940             | 166    | 1660            | 226    | 2260            |
| 100    | 1000            | 172    | 1720            | 238    | 2380            |
| 106    | 1060            | 178    | 1780            | 244    | 2440            |
| 118    | 1180            | 184    | 1840            |        |                 |

| Symbol | Description                      | Specifications   |
|--------|----------------------------------|--|
| -X14   | Model with drop prevention cover | The main unit is shipped fitted with a drop prevention cover available as an option. |

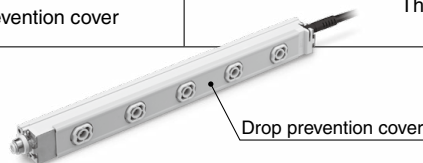

### Bar + High voltage power supply module + Controller

IZT 40 - 34 D 1 6H R - [ ] F [ ] - X14

IZT 42 - 34 D 1 6H R [ ] - [ ] F [ ] - X14

### Bar

IZT B 40 - 34 D 1 6H R - F - X14

Standard model number ⇨ pages 21, 22 and 23

#### Type

|      |
|------|
| 40   |
| 41*1 |
| 42   |

\*1 Only bar is ordered,  
41 cannot be selected.

#### Bar length

| Standard     | Symbol  | 16  | 22  | 34  | 40  | 46  | 58  | 64  | 82  | 112  | 130  | 160  | 190  | 232  | 250  |
|--------------|---|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|
|              | Length [mm]   | 160 | 220 | 340 | 400 | 460 | 580 | 640 | 820 | 1120 | 1300 | 1600 | 1900 | 2320 | 2500 |
| Non-standard | The bar of non-standard length is available. Refer to the how to order above. |     |     |     |     |     |     |     |     |      |      |      |      |      |      |

**Specifications**

| Ionizer model                                   |   | IZT40   | IZT41 (NPN)  | IZT41 (PNP)   | IZT42 (NPN)  | IZT42 (PNP)   |
|---|---|---|--|---|--|---|
| <b>Ion generation method</b>                    |   | Corona discharge type   |  |   |  |   |
| <b>Method of applying voltage</b>               |   | AC, DC*1  | AC, DC*1   |   | Dual AC  |   |
| <b>Applied voltage</b>                          |   | ±7000 V   |  |   | ±6000 V  |   |
| <b>Offset voltage*2</b>                         |   | Within ±30 V  |  |   |  |   |
| <b>Air purge</b>                                | <b>Fluid</b>  | Air (Clean dry air)   |  |   |  |   |
|   | <b>Operating pressure</b>                                 | 0.5 MPa or less   |  |   |  |   |
|   | <b>Proof pressure</b>                                     | 0.7 MPa   |  |   |  |   |
|   | <b>Connecting tube size<br/>(One side can be plugged)</b> | Metric size: ø4, ø6, ø8, ø10<br>Inch size: ø3/16", ø1/4", ø5/16", ø3/8"   |  |   |  |   |
| <b>Current consumption</b>                      |   | 0.7 A or less<br>(+0.6 A or less per ionizer when connected)  | 0.8 A or less<br>(+0.7 A or less per ionizer when connected)   |   | 1.4 A or less<br>(+1.3 A or less per ionizer when connected)   |   |
| <b>Power supply voltage</b>                     |   | 24 VDC ±10% (100 to 240 VAC: AC adapter option: Applicable when only one bar is used)                                     |  |   |  |   |
| <b>Input signal</b>                             | <b>Ion generation stop signal</b>                         | —   | Connected to DC (-)<br>Voltage range: 5 VDC or less<br>Current consumption: 5 mA or less   | Connected to DC (+)<br>Voltage range: 19 VDC to power supply voltage<br>Current consumption: 5 mA or less | Connected to DC (-)<br>Voltage range: 5 VDC or less<br>Current consumption: 5 mA or less                                 | Connected to DC (+)<br>Voltage range: 19 VDC to power supply voltage<br>Current consumption: 5 mA or less |
|   | <b>Maintenance detection signal</b>                       | —   | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)<br>Max. applied voltage: 26.4 VDC                                   | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)                    | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)<br>Max. applied voltage: 26.4 VDC | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)                    |
| <b>Output signal</b>                            | <b>Error signal</b>                                       |   |  |   |  |   |
| <b>Function</b>                                 |   | High voltage abnormality detection<br>(Ion generation stops when abnormality is detected)                                 | Auto balance, Maintenance detection, High voltage abnormality detection (Ion generation stops when abnormality is detected), and Ion generation stop input |   |  |   |
| <b>Effective static neutralization distance</b> |   | 50 to 2000 mm   |  |   |  |   |
| <b>Ambient and fluid temperatures</b>           | <b>Controller,<br/>High voltage power supply module</b>   | 0 to 40°C   |  |   |  |   |
|   | <b>Bar</b>  | 0 to 50°C   |  |   |  |   |
| <b>Ambient humidity</b>                         |   | 35 to 80% Rh (No condensation)  |  |   |  |   |
| <b>Material</b>                                 | <b>Controller</b>   | Cover: ABS, Aluminum, Switch: Silicone rubber   |  |   |  |   |
|   | <b>High voltage power supply module</b>                   | Cover: ABS, Aluminum  |  |   |  |   |
|   | <b>Bar</b>  | Cover: ABS, Emitter cartridge: PBT, Emitter: Tungsten or Single crystal silicon, High voltage cable: Silicone rubber, PVC |  |   |  |   |
| <b>Standards/Directive</b>                      |   | CE (EMC Directive)  |  |   |  |   |

\*1 Apply cathode or anode to DC.

\*2 When the air purge is performed between a charged object and an ionizer at a distance of 300 mm

**Weight** [g]

|              | Controller | High voltage power supply module |
|--------------|------------|----------------------------------|
| <b>IZT40</b> | 210        | 680                              |
| <b>IZT41</b> | 210        | 680                              |
| <b>IZT42</b> | 210        | 1350                             |

**Number of Emitter Cartridges/Bar Weight**

| Bar length symbol                            |                                 | 16   | 22   | 34   | 40   | 46   | 58   | 64   | 82   | 112  | 130  | 160  | 190  | 232  | 250  |
|--|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>Number of emitter cartridges (pcs.)</b>   |                                 | 2    | 3    | 5    | 6    | 7    | 9    | 10   | 13   | 18   | 21   | 26   | 31   | 38   | 41   |
| <b>IZT40<br/>IZT41<br/>(Common for bars)</b> | <b>High voltage cable (1 m)</b> | 360  | 420  | 530  | 590  | 650  | 760  | 820  | 990  | 1270 | 1440 | 1720 | 2010 | 2410 | 2580 |
|  | <b>High voltage cable (2 m)</b> | 490  | 550  | 660  | 720  | 780  | 890  | 950  | 1120 | 1400 | 1570 | 1850 | 2140 | 2540 | 2710 |
|  | <b>High voltage cable (3 m)</b> | 610  | 670  | 780  | 840  | 900  | 1010 | 1070 | 1240 | 1520 | 1690 | 1970 | 2260 | 2660 | 2830 |
| <b>IZT42</b>                                 | <b>High voltage cable (1 m)</b> | 520  | 580  | 690  | 750  | 810  | 920  | 980  | 1150 | 1430 | 1600 | 1880 | 2170 | 2570 | 2740 |
|  | <b>High voltage cable (2 m)</b> | 770  | 830  | 940  | 1000 | 1060 | 1170 | 1230 | 1400 | 1680 | 1850 | 2130 | 2420 | 2820 | 2990 |
|  | <b>High voltage cable (3 m)</b> | 1010 | 1070 | 1180 | 1240 | 1300 | 1410 | 1470 | 1640 | 1920 | 2090 | 2370 | 2660 | 3060 | 3230 |

**AC Adapter (Sold Separately)** ⇨ page 29

| Model                      | IZT40-CG1, IZT40-CG2           |
|----------------------------|--------------------------------|
| <b>Input voltage</b>       | 100 to 240 VAC, 50/60 Hz       |
| <b>Output current</b>      | 1.9 A                          |
| <b>Ambient temperature</b> | 0 to 40°C                      |
| <b>Ambient humidity</b>    | 35 to 65% Rh (No condensation) |
| <b>Weight</b>              | 375 g                          |
| <b>Standards/Directive</b> | CE, cUL                        |

Technical Data

IZT40/41/42

IZT43


Glossary

Specific Product Precautions


# IZT40/41/42 Series

## Construction

### IZT40, 41 series

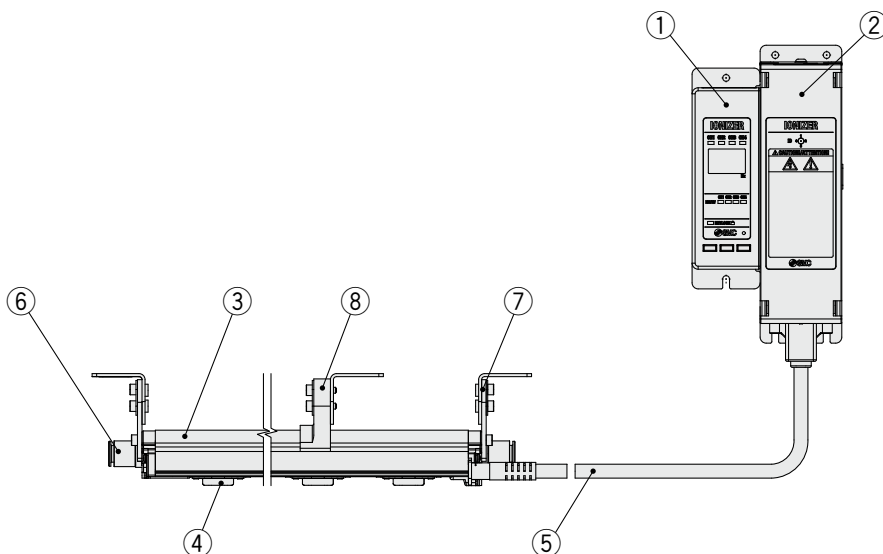

### IZT42 series

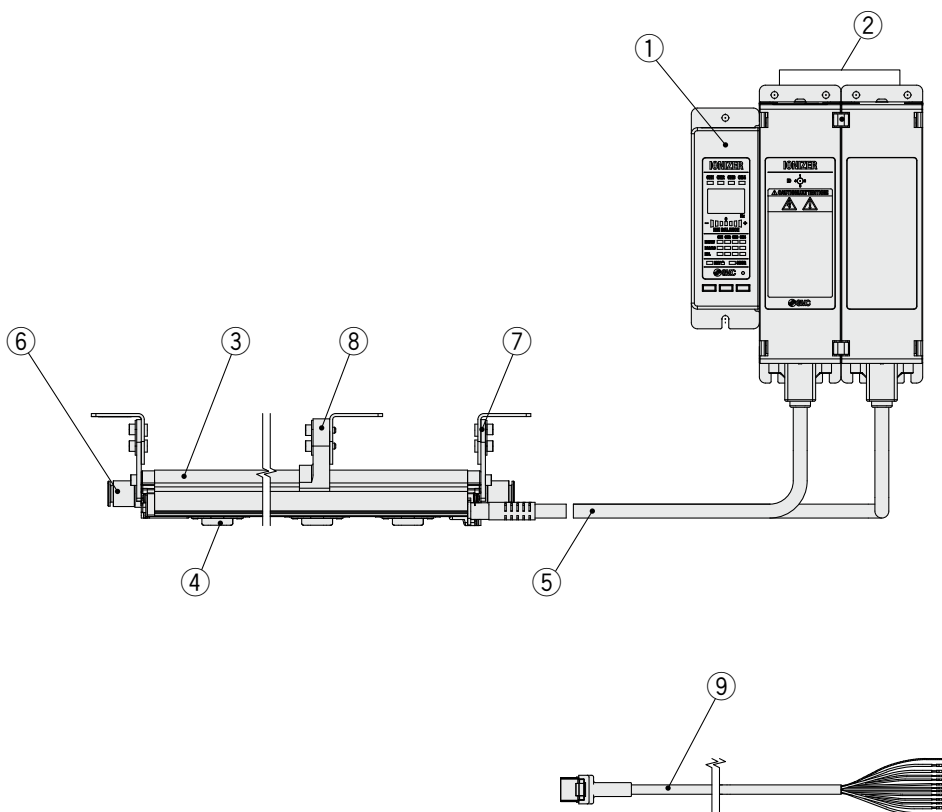

| No. | Description                      |
|-----|----------------------------------|
| 1   | Controller                       |
| 2   | High voltage power supply module |
| 3   | Bar                              |
| 4   | Emitter cartridge                |
| 5   | High voltage cable               |
| 6   | One-touch fitting                |
| 7   | End bracket                      |
| 8   | Intermediate bracket             |
| 9   | Power supply cable               |

**Accessories (for Individual Parts)**

**Emitter cartridge (For IZT40, 41, 42)**

**IZT40 - N D**

• **Emitter cartridge type/Emitter material**

| Symbol   | Type  | Material |
|----------|---|----------|
| <b>D</b> | High speed static neutralization cartridge    | Tungsten |
| <b>E</b> | Energy saving static neutralization cartridge | Silicon  |
| <b>L</b> | Energy saving static neutralization cartridge | Tungsten |
| <b>M</b> | Energy saving static neutralization cartridge | Silicon  |

High speed static neutralization    Energy saving static neutralization



| Cartridge color | Emitter material |
|-----------------|------------------|
| White           | Tungsten         |
| Gray            | Silicon          |

**IZS40 - N V**

• **Emitter cartridge type/Emitter material**

| Symbol   | Type                                    | Material |
|----------|---|----------|
| <b>V</b> | Energy saving high-efficiency cartridge | Tungsten |
| <b>S</b> | Energy saving high-efficiency cartridge | Silicon  |

Energy saving high-efficiency



| Cartridge color | Emitter material |
|-----------------|------------------|
| White           | Tungsten         |
| Gray            | Silicon          |

**Bar bracket (For IZT40, 41, 42)**

**IZT40 - B E1**

• **Bar bracket**

| Symbol    | Type                   |
|-----------|------------------------|
| <b>E1</b> | End bracket 1          |
| <b>E2</b> | End bracket 2          |
| <b>M1</b> | Intermediate bracket 1 |
| <b>M2</b> | Intermediate bracket 2 |

\* Refer to the table below for selecting a bracket.

**Bracket combinations**


|               | Intermediate bracket 1    | Intermediate bracket 2    |
|---------------|---------------------------|---------------------------|
| End bracket 1 | ○ (Adjustment angle ±90°) | ×                         |
| End bracket 2 | ×                         | ○ (Adjustment angle ±15°) |

○: Available    ×: Not available

\* The number of intermediate brackets required, as listed below, depends on the bar length. Two end brackets are always required regardless of the bar length.

**Number of brackets**

| Bar length   | End bracket | Intermediate bracket |
|--------------|-------------|----------------------|
| 160 to 760   | 2           | None                 |
| 820 to 1600  |             | 1                    |
| 1660 to 2380 |             | 2                    |
| 2440 to 2500 |             | 3                    |

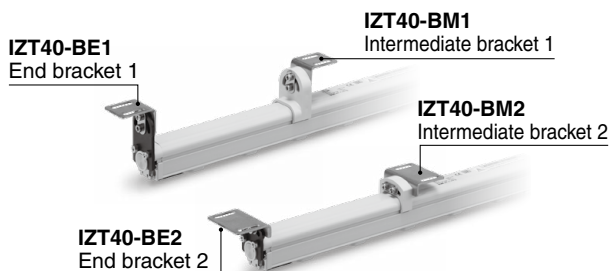

**Power supply cable**

**IZT40 - CP 3**

• **Power supply cable length**

| Symbol    | Length [m] |
|-----------|------------|
| <b>3</b>  | 3          |
| <b>5</b>  | 5          |
| <b>10</b> | 10         |
| <b>15</b> | 15         |

**Cable specifications**

⇨ page 38



**DIN rail mounting bracket for controller and high voltage power supply module**


**IZT40 - B 1**

• **DIN rail mounting bracket**

| Symbol   | Type  |
|----------|---|
| <b>1</b> | For Controller                                  |
| <b>2</b> | For High voltage power supply module            |
| <b>3</b> | For High voltage power supply module for IZTP42 |

For Controller

For High voltage power supply module

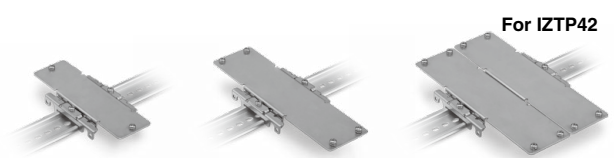

IZT40-B1

IZT40-B2

IZT40-B3

**High voltage cable holder**

**IZT40 - E 1**

• **High voltage cable holder**

| Symbol   | Type     |
|----------|----------|
| <b>1</b> | Straight |
| <b>2</b> | Elbow    |

Straight

Elbow



IZT40-E1

IZT40-E2

# IZT40/41/42 Series

## Accessories Sold Separately

Drop prevention cover (For IZT40, 41, 42)

IZS40 - E **2**

• Number of fixed emitter cartridges


| Symbol | Type   |
|--------|--------|
| 2      | 2 pcs. |
| 3      | 3 pcs. |
| 4      | 4 pcs. |
| 5      | 5 pcs. |

### Standard bar length


| Bar length symbol | Number of required drop prevention covers |          |          |          |
|-------------------|---|----------|----------|----------|
|                   | IZS40-E2                                  | IZS40-E3 | IZS40-E4 | IZS40-E5 |
| 16                | 1   | —        | —        | —        |
| 22                | —   | 1        | —        | —        |
| 34                | —   | —        | —        | 1        |
| 40                | —   | 2        | —        | —        |
| 46                | —   | 1        | 1        | —        |
| 58                | —   | —        | 1        | 1        |
| 64                | —   | —        | —        | 2        |
| 82                | —   | 1        | —        | 2        |
| 112               | —   | 1        | —        | 3        |
| 130               | —   | 2        | —        | 3        |
| 160               | —   | 2        | —        | 4        |
| 190               | —   | 2        | —        | 5        |
| 232               | —   | 1        | —        | 7        |
| 250               | —   | 2        | —        | 7        |

\* Please contact SMC for the non-standard bar length.

Mounted part of emitter cartridge

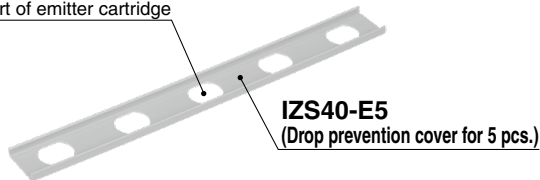

The model number requires the suffix "-X14" to indicate that the body is to be shipped fitted with a drop prevention cover.  
⇒ page 25

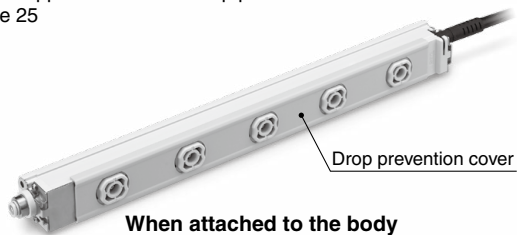

When attached to the body

AC adapter

IZT40 - CG **1**

• AC adapter

| Symbol | Type            |
|--------|-----------------|
| 1      | With AC cord    |
| 2      | Without AC cord |

\* AC cord is only for use in Japan. (Rated voltage 125 V, Plug JIS C 8303, Inlet IEC 60320-C6) External input and output cannot be used when the AC adapter is being used.



AC adapter

Separate cable

IZT40 - CF **1**

• Separate cable length

| Symbol | Length [m] |
|--------|------------|
| 1      | 1          |
| 2      | 2          |
| 3      | 3          |



Cleaning kit (For IZT40, 41, 42)

IZS30 - M2



Replacement felt pad: IZS30-A0201  
Replacement rubber grindstone: IZS30-A0202

**Wiring: IZT40, 41, 42**

**IZT40**

| Cable color | Signal name | Signal direction | Description   |
|-------------|-------------|------------------|---|
| Brown       | DC (+)      | IN               | Connect the power supply to operate the ionizer.  |
| Blue        | DC (-)      | IN               |   |
| Green       | F.G.        | —                | Make sure to ground with 100 Ω or less to use it as a reference electric potential for ionizer. |
| Pink        | —           | —                | —   |
| Gray        | —           | —                | —   |
| Yellow      | —           | —                | —   |
| Purple      | —           | —                | —   |
| White       | —           | —                | —   |
| Black       | —           | —                | —   |
| Orange      | —           | —                | —   |

**IZT41, 42**

| Cable color | Signal name                    | Signal direction | Description  |
|-------------|--------------------------------|------------------|--|
| Brown       | DC (+)                         | IN               | Connect the power supply to operate the ionizer.   |
| Blue        | DC (-)                         | IN               |  |
| Green       | F.G.                           | —                | Make sure to ground with 100 Ω or less to use it as a reference electric potential for ionizer.  |
| Pink        | Ion generation stop signal CH1 | IN               | Signal input to turn ON/OFF ion generation of each bar (CH1 to 4).<br>NPN specification: Stops generating ions by connecting to 0 V. (Starts generating ions when disconnected.)<br>PNP specification: Stops generating ions by connecting to +24 VDC. (Starts generating ions when disconnected.) |
| Gray        | Ion generation stop signal CH2 | IN               |  |
| Yellow      | Ion generation stop signal CH3 | IN               |  |
| Purple      | Ion generation stop signal CH4 | IN               |  |
| White       | Maintenance detection signal   | OUT (A contact)  | Turns ON when emitters need cleaning.  |
| Black       | Error signal                   | OUT (B contact)  | Turns OFF in case of power supply failure, high voltage failure, CPU failure, communication failure, cooling fan motor failure, output signal overcurrent, or inconsistent or CH setting duplication or non-connection of high voltage power supply module (ON when there is no problem).          |
| Orange      | —                              | —                | —  |


\* Refer to the power supply cable dimensions on page 38 for the cable specifications.

**Frequencies**

| Series         | IZT40  | IZT41  | IZT42 |
|----------------|--------|--------|-------|
| Controller     | IZTC40 | IZTC41 |       |
| Frequency [Hz] | 1      | 1      | 0.1   |
|                | 3      | 3      | 0.5   |
|                | 5      | 5      | 1     |
|                | 8      | 8      | 3     |
|                | 10     | 10     | 5     |
|                | 15     | 15     | 8     |
|                | 20     | 20     | 10    |
|                | 30     | 30     | 15    |
|                | DC+    | DC+    | 20    |
|                | DC-    | DC-    | 30    |



**Wiring Circuit: IZT40**

**Controller**

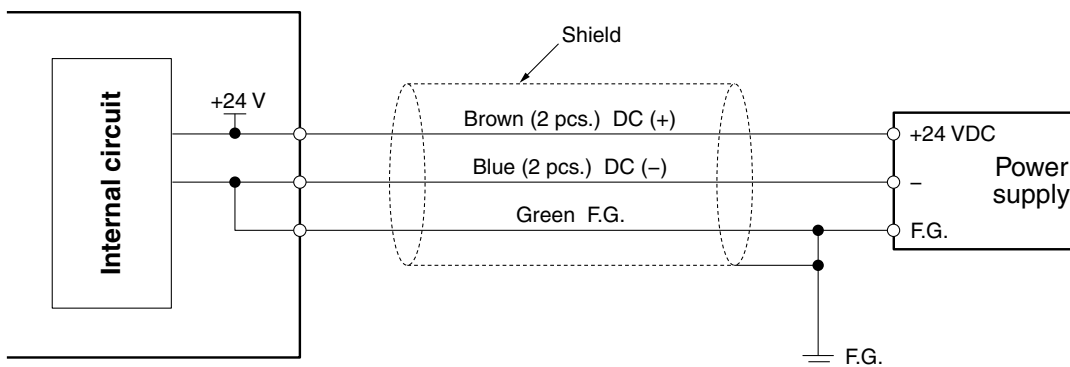

# IZT40/41/42 Series







## Wiring Circuit: IZT41, 42

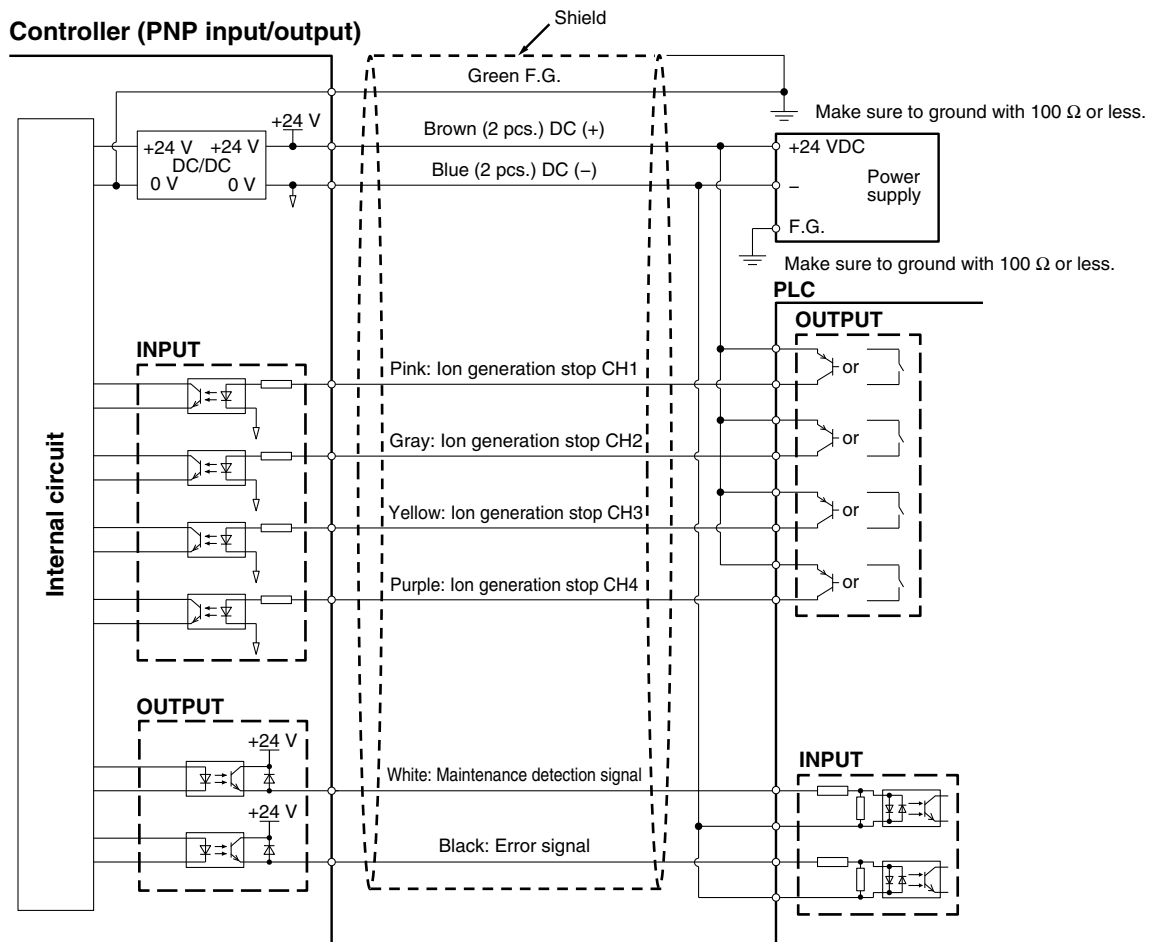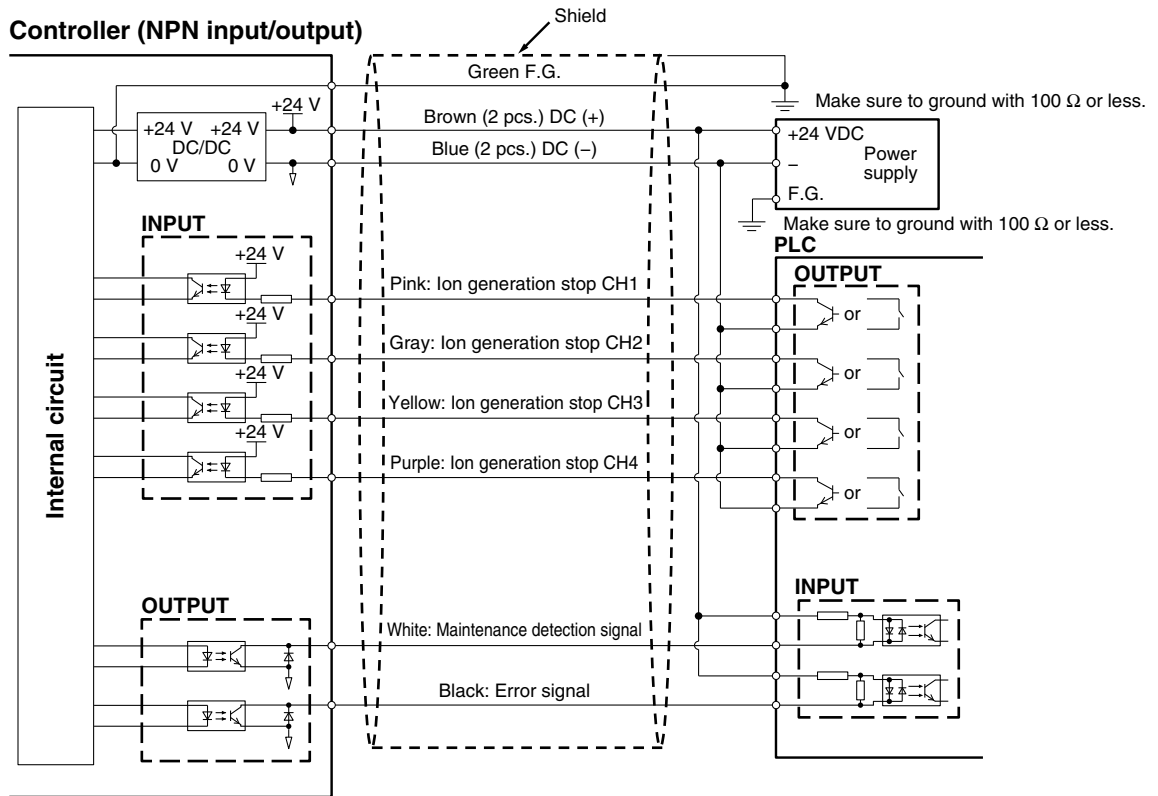



**Dimensions**

**Ionizer IZT40, 41**

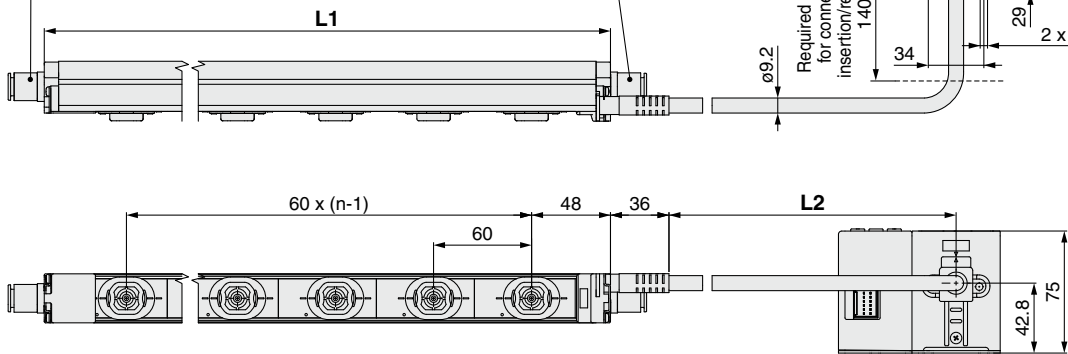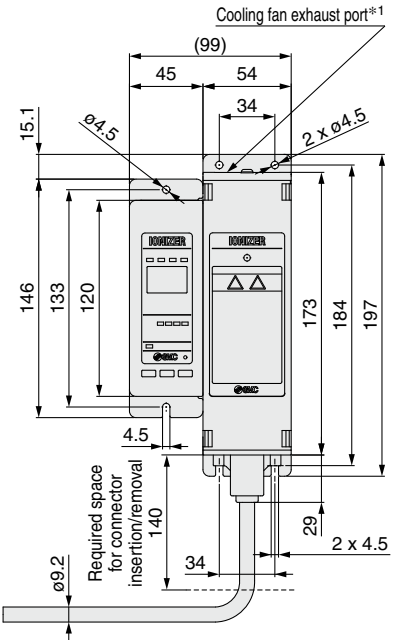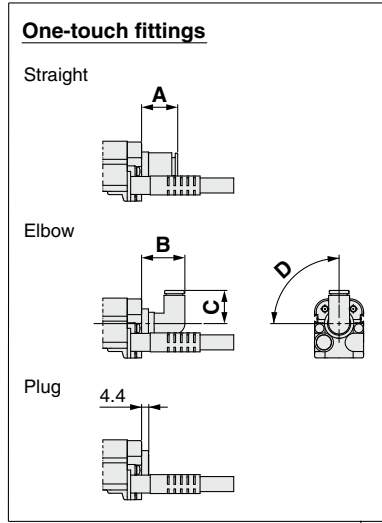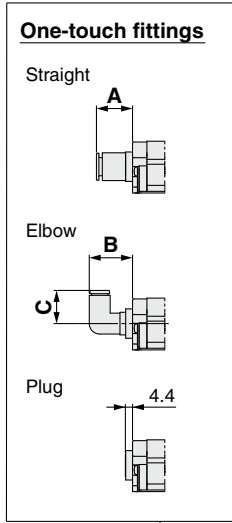

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

**No. of Emitter Cartridges n, Bar Length L1**

| Part no. | n [pcs.] | L1 [mm] |
|----------|----------|---------|
| IZT□-16  | 2        | 160     |
| IZT□-22  | 3        | 220     |
| IZT□-34  | 5        | 340     |
| IZT□-40  | 6        | 400     |
| IZT□-46  | 7        | 460     |
| IZT□-58  | 9        | 580     |
| IZT□-64  | 10       | 640     |
| IZT□-82  | 13       | 820     |
| IZT□-112 | 18       | 1120    |
| IZT□-130 | 21       | 1300    |
| IZT□-160 | 26       | 1600    |
| IZT□-190 | 31       | 1900    |
| IZT□-232 | 38       | 2320    |
| IZT□-250 | 41       | 2500    |

**High Voltage Cable Length L2**

| Symbol | L2 [mm] |
|--------|---------|
| 1      | 1000    |
| 2      | 2000    |
| 3      | 3000    |

**One-touch Fittings**

**Straight** [mm]

|        | Applicable tubing O.D. | A  |
|--------|------------------------|----|
| Metric | ø4                     | 13 |
|        | ø6                     | 13 |
|        | ø8                     | 15 |
|        | ø10                    | 22 |
| Inch   | ø3/16"                 | 15 |
|        | ø1/4"                  | 14 |
|        | ø5/16"                 | 15 |
|        | ø3/8"                  | 23 |

**Elbow** [mm]

|        | Applicable tubing O.D. | B  | C  | D   |
|--------|------------------------|----|----|-----|
| Metric | ø4                     | 25 | 19 | 90° |
|        | ø6                     | 27 | 21 | 75° |
|        | ø8                     | 29 | 24 | 73° |
|        | ø10                    | 37 | 27 | 71° |
| Inch   | ø3/16"                 | 26 | 20 | 90° |
|        | ø1/4"                  | 27 | 21 | 75° |
|        | ø5/16"                 | 29 | 24 | 73° |
|        | ø3/8"                  | 36 | 27 | 71° |

Technical Data

IZT40/41/42

IZT43

Glossary







Specific Product Precautions

# IZT40/41/42 Series

## Dimensions








### End bracket IZT40-BE1

### Intermediate bracket IZT40-BM1

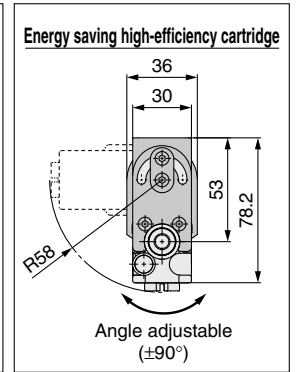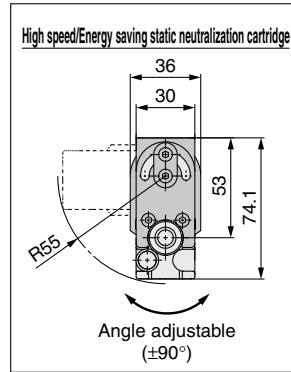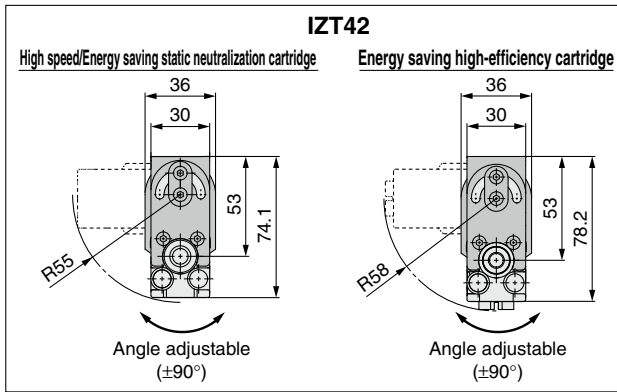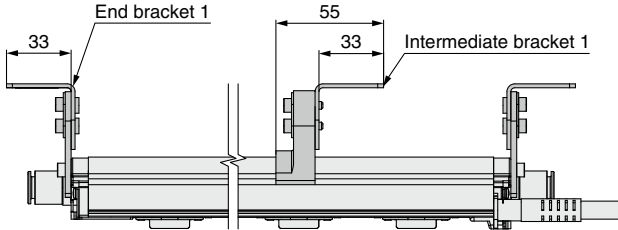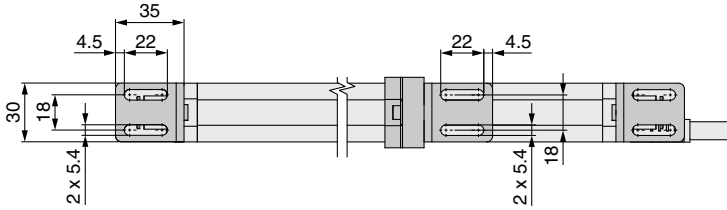


### End bracket IZT40-BE2

### Intermediate bracket IZT40-BM2

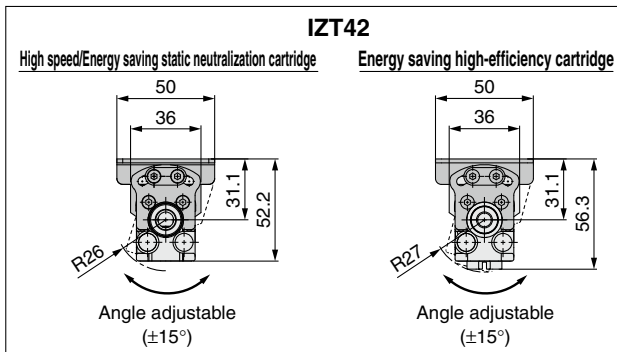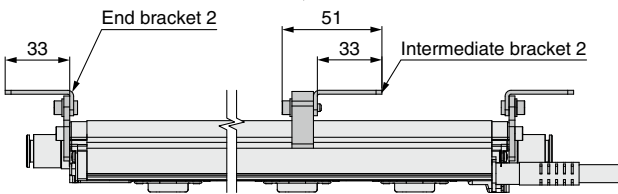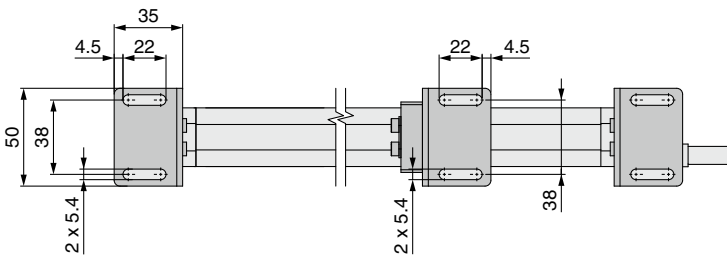

**Dimensions**

**Ionizer IZT42**

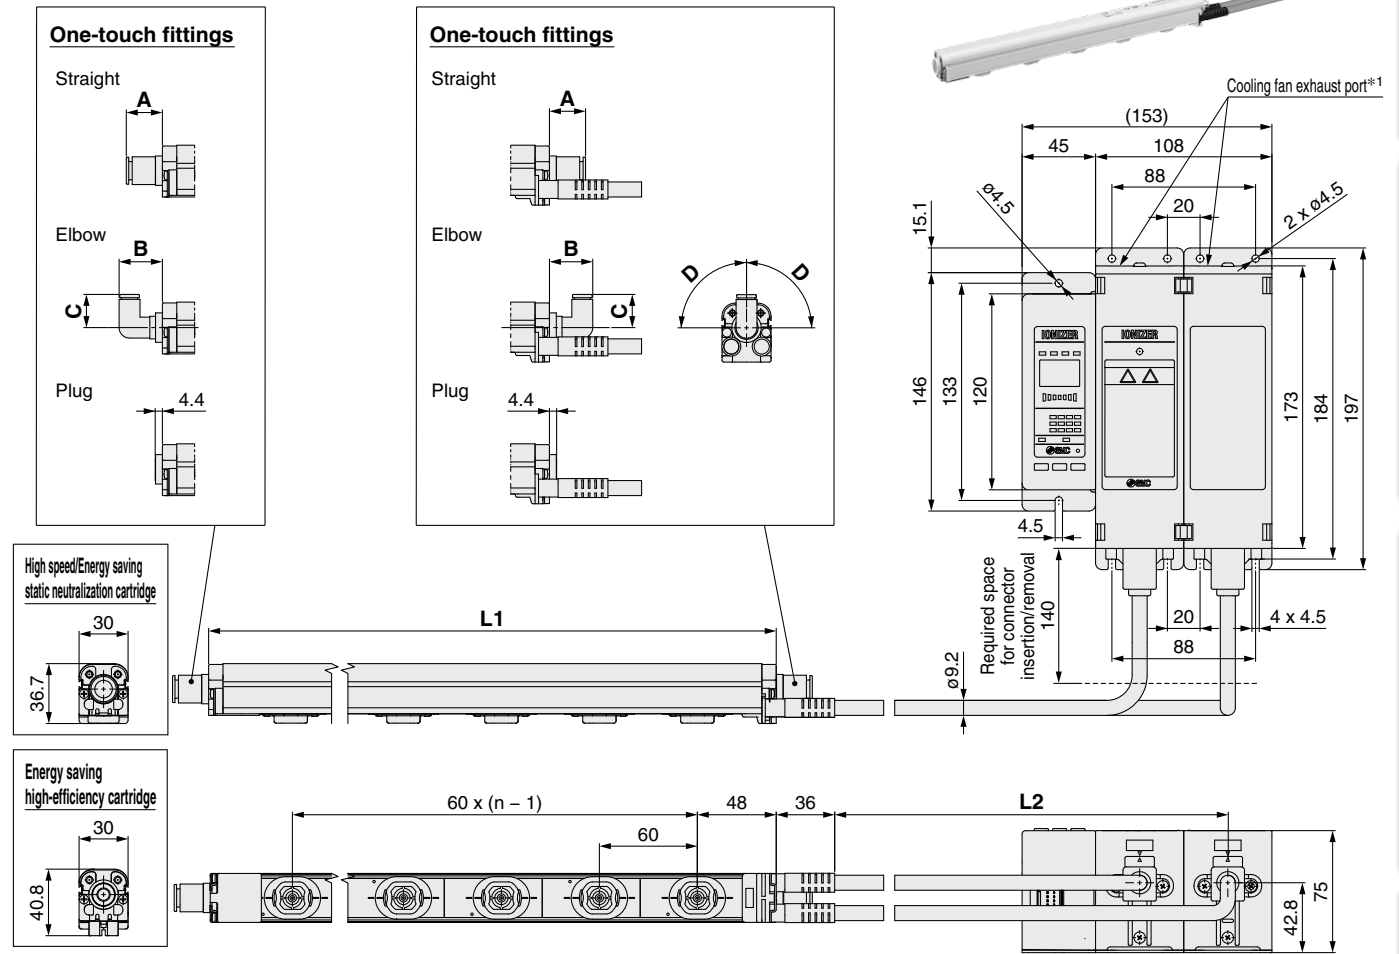

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

**No. of Emitter Cartridges n, Bar Length L1**

| Part no. | n [pcs.] | L1 [mm] |
|----------|----------|---------|
| IZT□-16  | 2        | 160     |
| IZT□-22  | 3        | 220     |
| IZT□-34  | 5        | 340     |
| IZT□-40  | 6        | 400     |
| IZT□-46  | 7        | 460     |
| IZT□-58  | 9        | 580     |
| IZT□-64  | 10       | 640     |
| IZT□-82  | 13       | 820     |
| IZT□-112 | 18       | 1120    |
| IZT□-130 | 21       | 1300    |
| IZT□-160 | 26       | 1600    |
| IZT□-190 | 31       | 1900    |
| IZT□-232 | 38       | 2320    |
| IZT□-250 | 41       | 2500    |

**High Voltage Cable Length L2**

| Symbol | L2 [mm] |
|--------|---------|
| 1      | 1000    |
| 2      | 2000    |
| 3      | 3000    |

**One-touch Fittings**

**Straight** [mm]

|        | Applicable tubing O.D. | A  |
|--------|------------------------|----|
| Metric | ø4                     | 13 |
|        | ø6                     | 13 |
|        | ø8                     | 15 |
|        | ø10                    | 22 |
| Inch   | ø3/16"                 | 15 |
|        | ø1/4"                  | 14 |
|        | ø5/16"                 | 15 |
|        | ø3/8"                  | 23 |

**Elbow** [mm]

|        | Applicable tubing O.D. | B  | C  | D   |
|--------|------------------------|----|----|-----|
| Metric | ø4                     | 25 | 19 | 90° |
|        | ø6                     | 27 | 21 | 75° |
|        | ø8                     | 29 | 24 | 73° |
|        | ø10                    | 37 | 27 | 71° |
| Inch   | ø3/16"                 | 26 | 20 | 90° |
|        | ø1/4"                  | 27 | 21 | 75° |
|        | ø5/16"                 | 29 | 24 | 73° |
|        | ø3/8"                  | 36 | 27 | 71° |

Technical Data

IZT40/41/42

IZT43




Glossary

Specific Product Precautions

# IZT40/41/42 Series



## Dimensions

### Controller

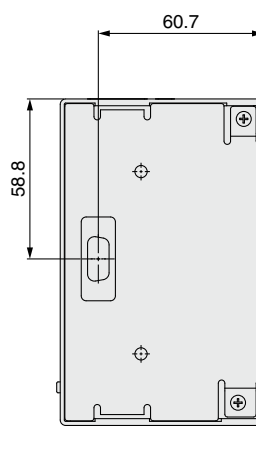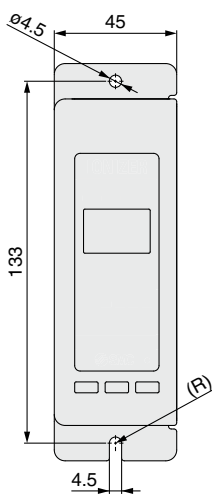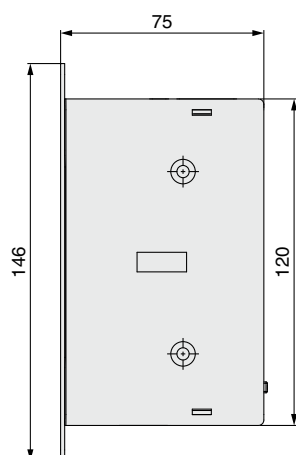




IZT41, 42

IZT40





When a power supply cable is inserted

### When a DIN rail mounting bracket (IZT40-B1) is used

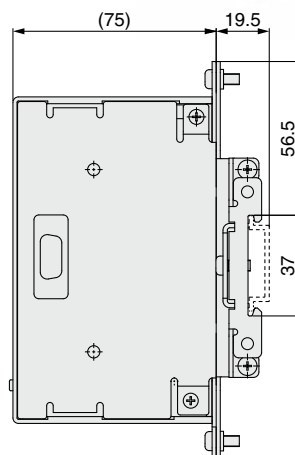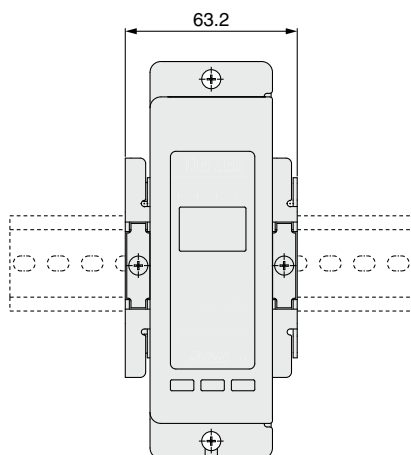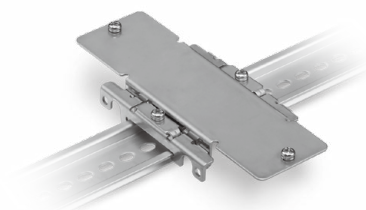



**Dimensions**

**High voltage power supply module for IZT40, 41**

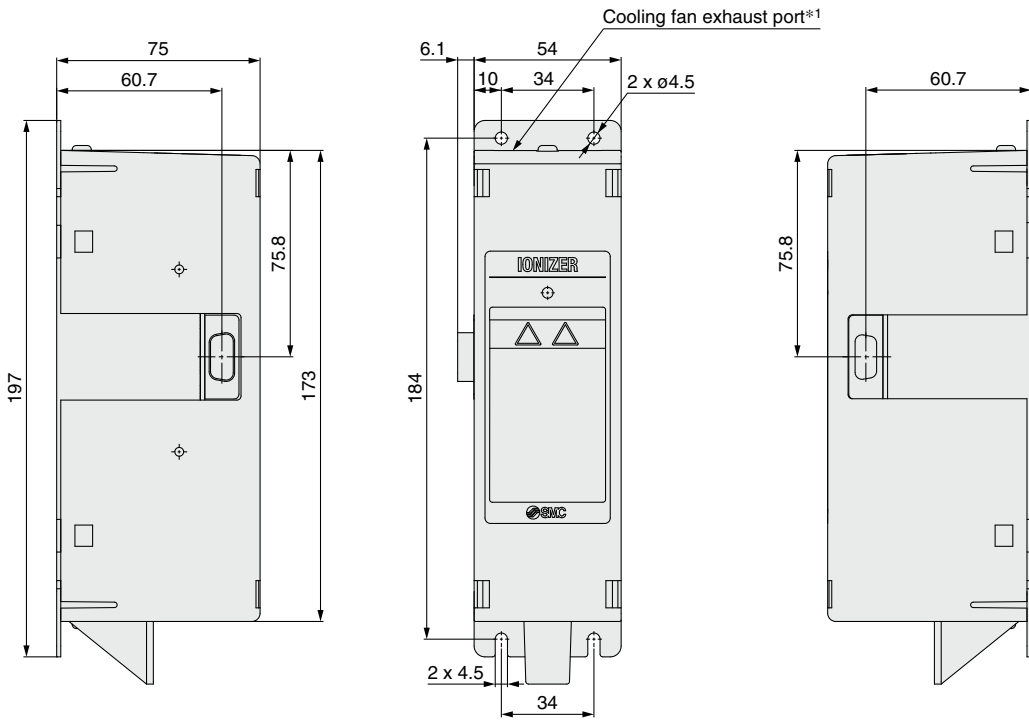

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

**When a DIN rail mounting bracket (IZT40-B2) is used**

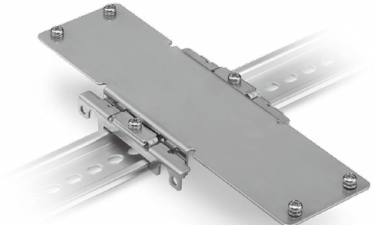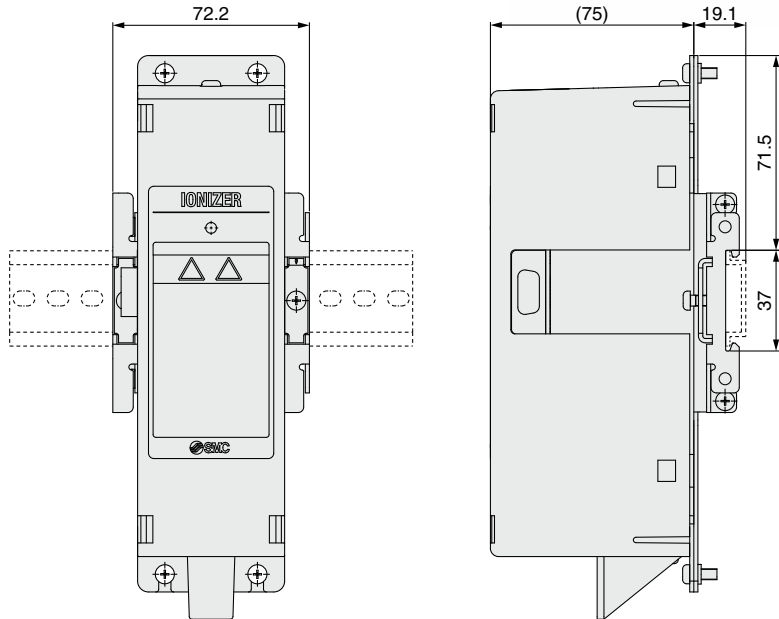

Technical Data

**IZT40/41/42**

**IZT43**



Glossary

Specific Product Precautions


# IZT40/41/42 Series

## Dimensions


### High voltage power supply module for IZT42

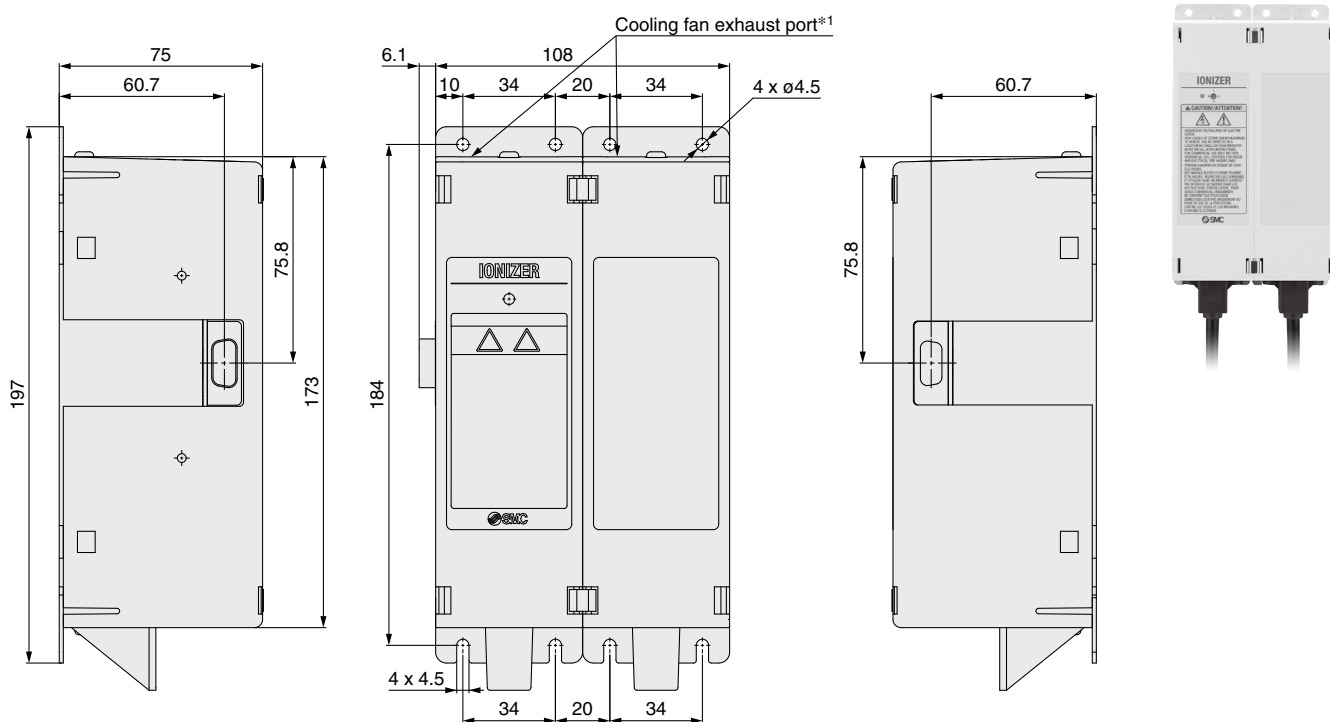

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

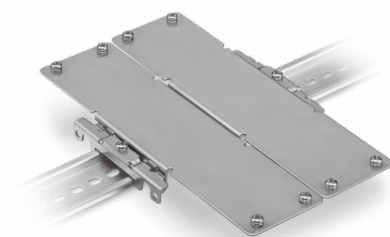


### When a DIN rail mounting bracket (IZT40-B3) is used

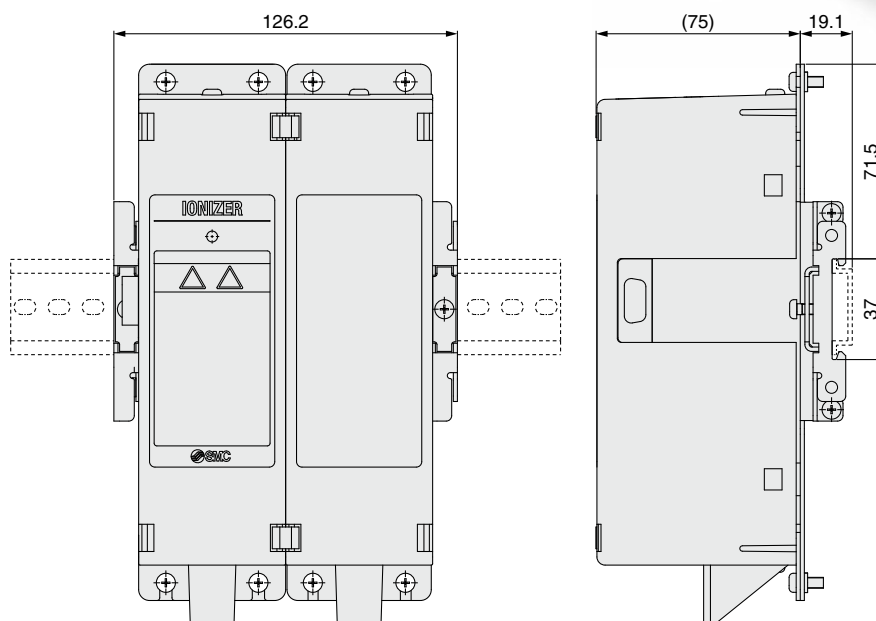

**Dimensions**

**Power supply cable**

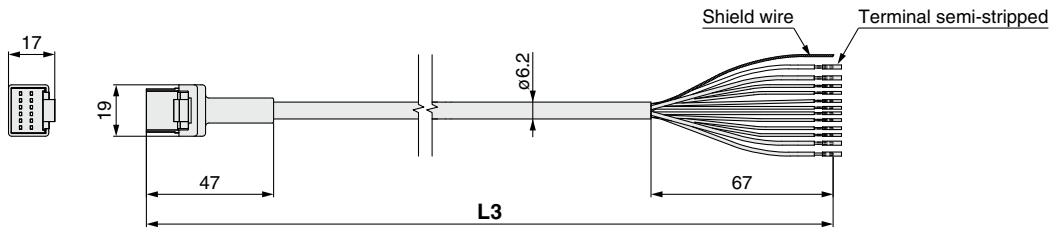


**Cable Length L3**

| Part number       | L3 [mm] |
|-------------------|---------|
| <b>IZT40-CP3</b>  | 2950    |
| <b>IZT40-CP5</b>  | 5000    |
| <b>IZT40-CP10</b> | 9800    |
| <b>IZT40-CP15</b> | 15000   |

**Cable Specifications**

|                         |   |  |
|-------------------------|---|--|
| No. of cable wires/Size | 12 cores/AWG20 (4 cores), AWG28 (8 cores) |  |
| Conductor               | Nominal cross section                     | 0.54 mm <sup>2</sup> (4 cores), 0.09 mm <sup>2</sup> (8 cores)                       |
|                         | O.D.                                      | 0.96 mm (4 cores), 0.38 mm (8 cores)   |
| Insulator               | O.D.                                      | 1.4 mm Brown, Blue<br>0.7 mm White, Green, Pink, Purple, Gray, Yellow, Orange, Black |
|                         | Material                                  | Lead-free PVC  |
| Sheath                  | O.D.                                      | 6.2 mm   |


**Separate cable IZT40-CF□**

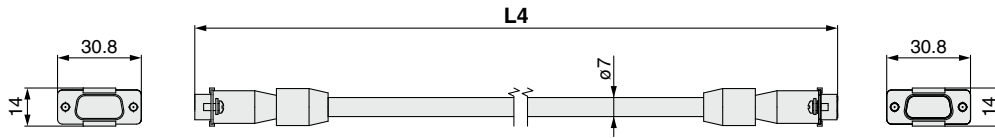

**Cable Length L4**

| Part number      | L4 [mm] |
|------------------|---------|
| <b>IZT40-CF1</b> | 1000    |
| <b>IZT40-CF2</b> | 2000    |
| <b>IZT40-CF3</b> | 3000    |

**When a separate cable is used**

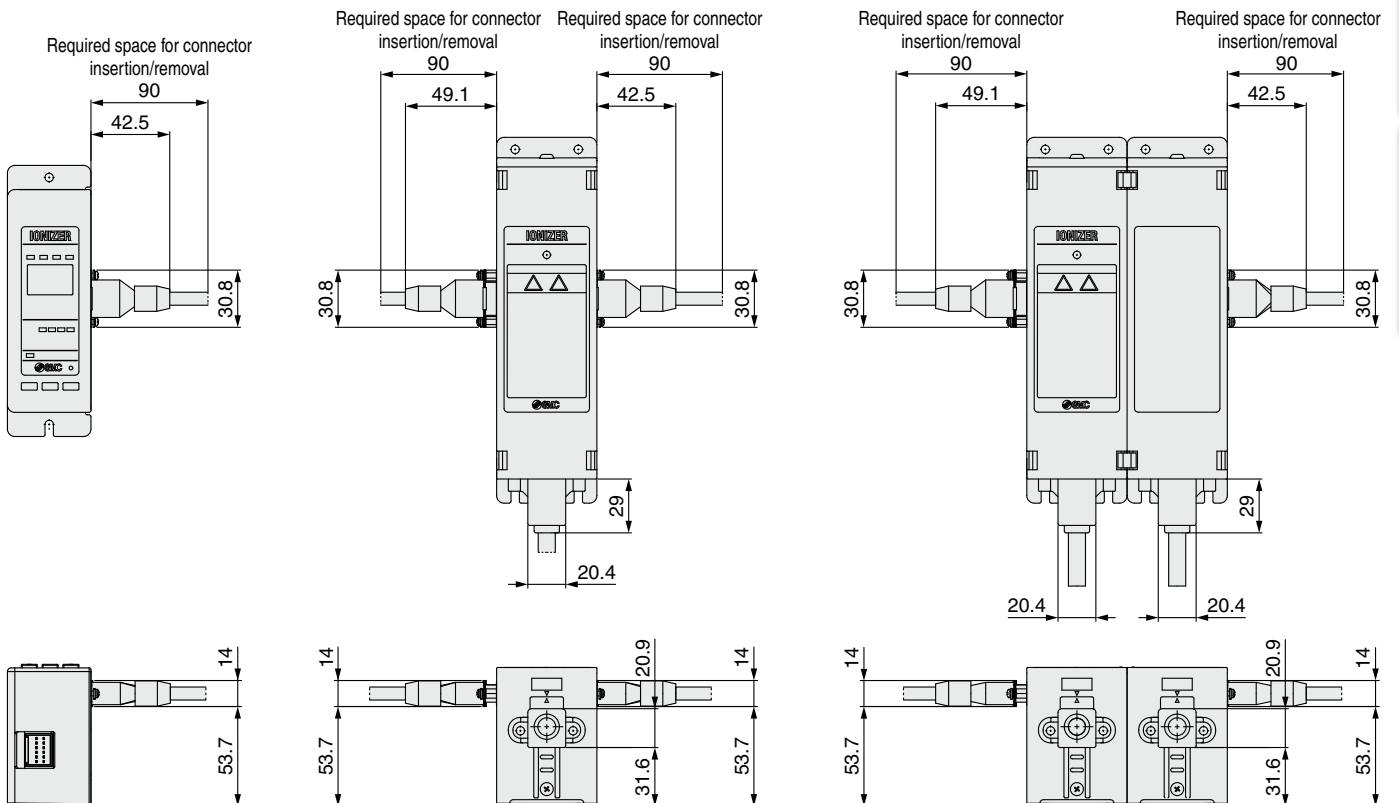


# IZT40/41/42 Series

## Dimensions


### High voltage cable holder

#### Straight IZT40-E1

##### Cross-sectional view A-A

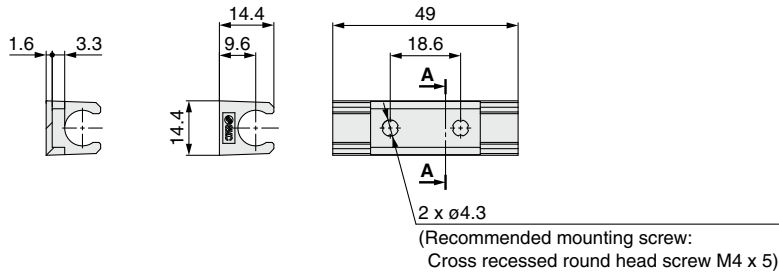

#### Elbow IZT40-E2

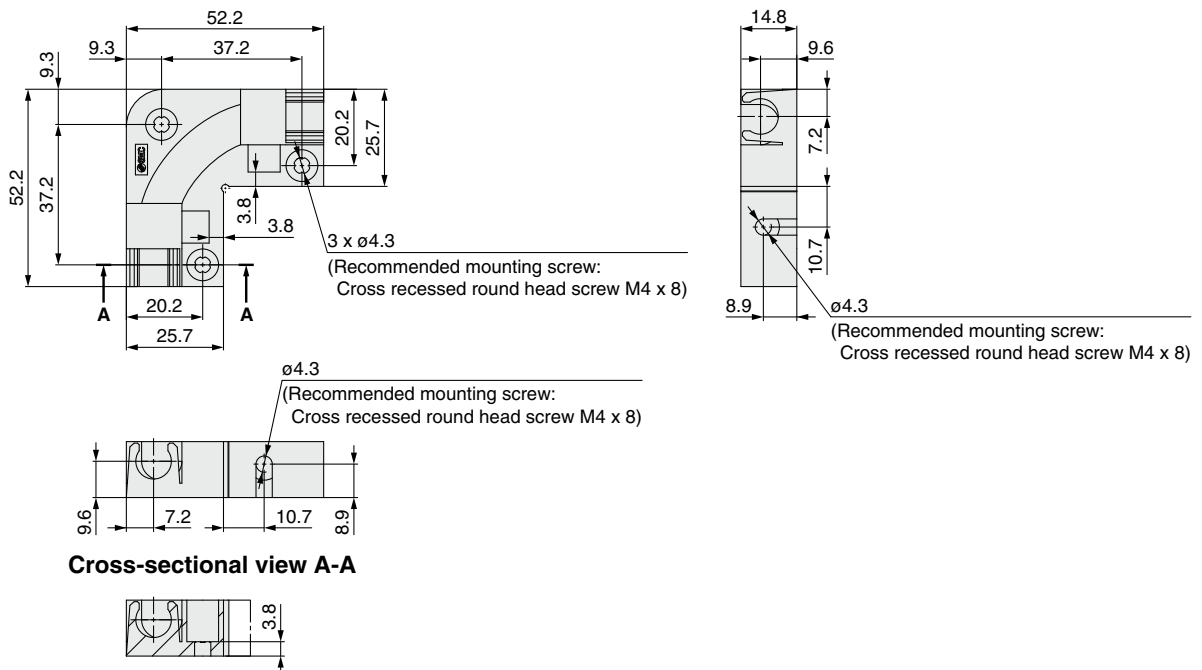



Specific Product  
Precautions

Glossary

IZT43

IZT40/41/42

Technical Data

# IZT43 Series

## Technical Data


### Static Neutralization Characteristics

\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.


#### ① Installation Distance and Discharge Time (Discharge Time from 1000 V to 100 V)

##### IZT43 AC Mode


For cartridges without air purge

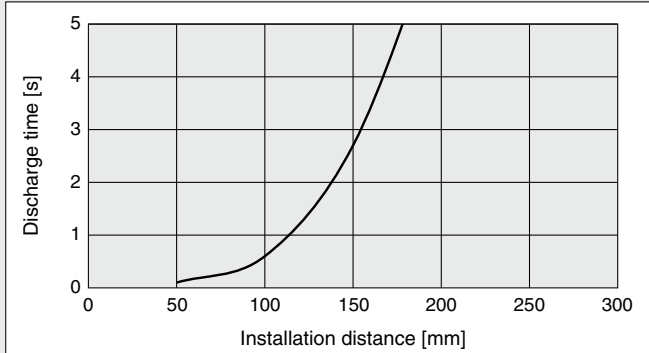

High speed static neutralization cartridge

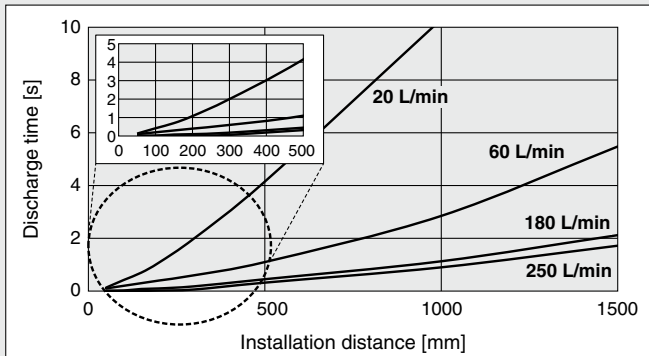

Energy saving static neutralization cartridge

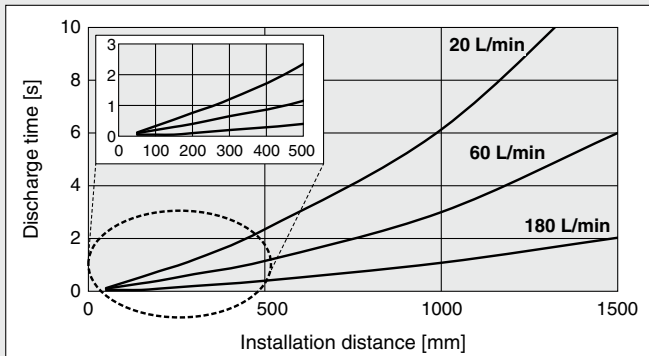


#### ② Static Neutralization Range (Discharge Time from 1000 V to 100 V)

##### IZT43 Ion Generation Frequency: 30 Hz


1) For cartridges without air purge

For IZT43-D, L

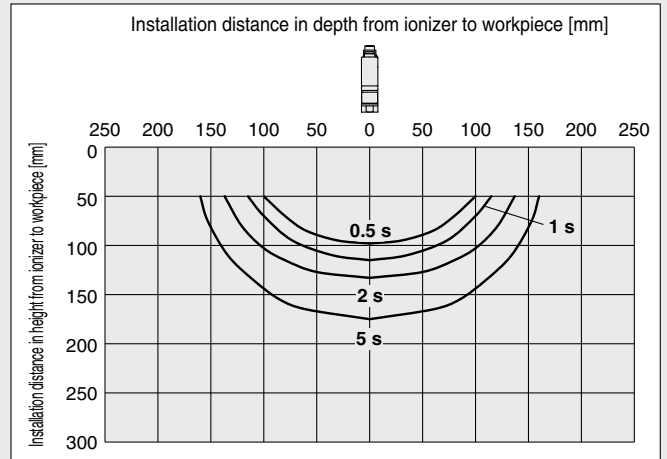


2) High speed static neutralization cartridge, Supply pressure: 0.5 MPa

For IZT43-D

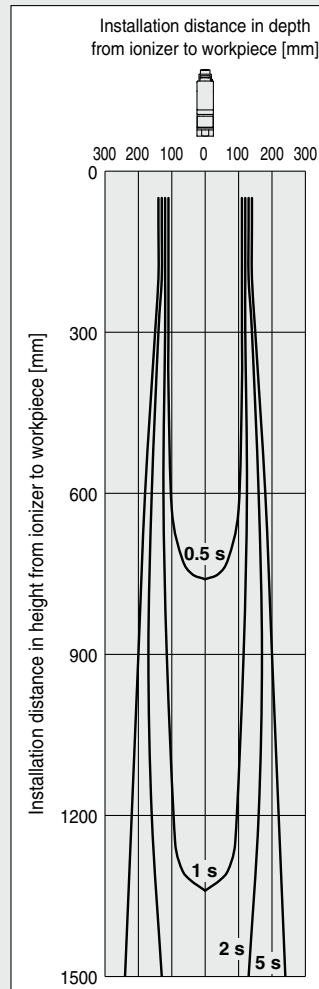

3) Energy saving static neutralization cartridge, Supply pressure: 0.5 MPa

For IZT43-L

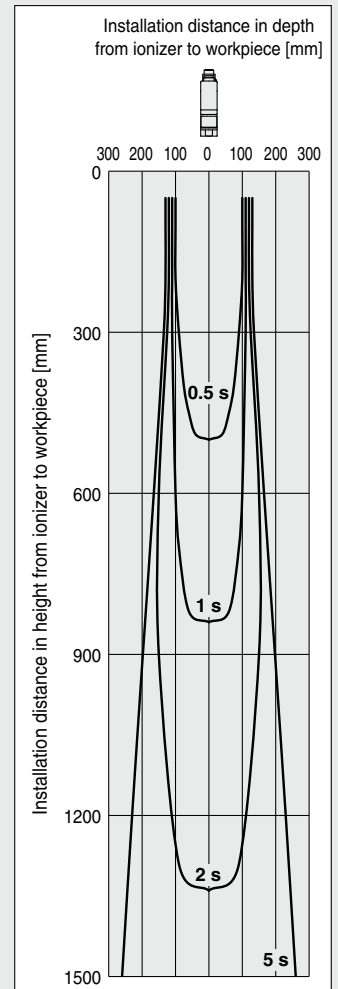


## Static Neutralization Characteristics


\* Static neutralization characteristics are based on data using a charged plate (dimensions: 150 mm x 150 mm, capacitance: 20 pF) as defined in the U.S. ANSI standards (ANSI/ESD STM3.1-2015). Use this data only as a guideline for model selection because the values vary depending on the material and/or size of the subject.

### ③ Pressure — Flow Rate Characteristics

High speed static neutralization cartridge

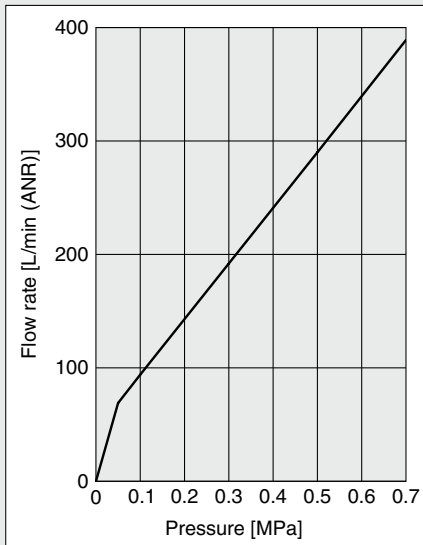


Energy saving static neutralization cartridge

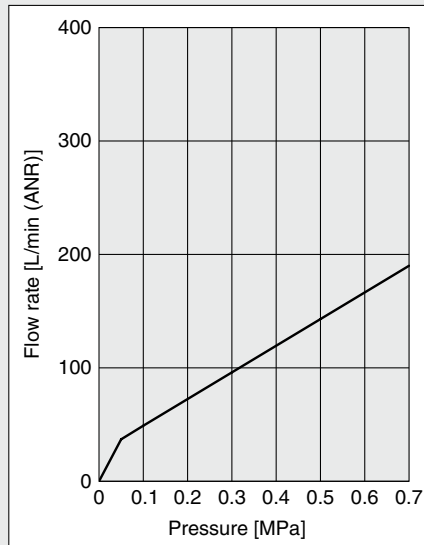

## How to measure

### a) Air supply

IZT43-D, L Connecting tube: O.D.  $\phi 6$  x I.D.  $\phi 4$

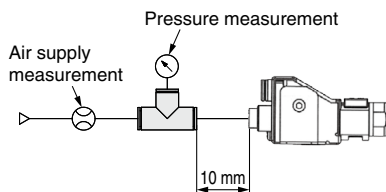


# Separate Controller

## Nozzle Type Ionizer

# IZT43 Series



High voltage power supply module

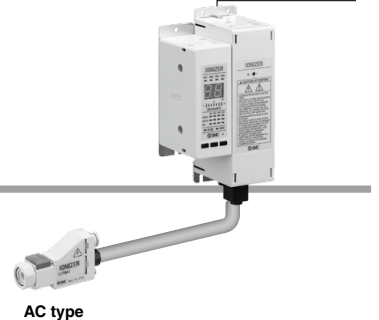

### How to Order

**Nozzle** + **High voltage power supply module** + **Controller**

IZT 43 - **D** **1** **6H** **□** - **3** **F** **U**

1 2 3 4 5 6 7 8

#### 1 Model

| Symbol | Model   |
|--------|---------|
| 43     | AC type |

#### 2 Emitter cartridge type

| Symbol | Type  |
|--------|---|
| D      | High speed static neutralization cartridge    |
| L      | Energy saving static neutralization cartridge |

#### 3 High voltage cable length

| Symbol | High voltage cable length [m] |
|--------|-------------------------------|
| 1      | 1                             |
| 2      | 2                             |
| 3      | 3                             |

\* The number of included high voltage cable holders differs depending on the high voltage cable length. (Refer to the table below.)

Number of included high voltage cable holders  
⇨ page 46

| Symbol | IZT43    |       |
|--------|----------|-------|
|        | Straight | Elbow |
| 1      | 1        | 1     |
| 2      | 2        | 1     |
| 3      | 3        | 1     |

#### 4 One-touch fitting

| Symbol | Metric size |
|--------|-------------|
| 6H     | ø6 Straight |
| 6L     | ø6 Elbow    |

| Symbol | Inch size      |
|--------|----------------|
| 7H     | ø1/4" Straight |
| 7L     | ø1/4" Elbow    |

#### 5 Input/Output

| Symbol | Input/Output |
|--------|--------------|
| Nil    | NPN          |
| P      | PNP          |

\* Since the input/output function cannot be used when the AC adapter is being used, specify "Nil."

#### 6 Power supply cable length

| Symbol | Length [m] |
|--------|------------|
| 3      | 3          |
| 5      | 5          |
| 10     | 10         |
| 15     | 15         |
| N      | None       |

\* To use an AC adapter, specify "N", and select the AC adapter sold separately.

#### 7 Nozzle bracket ⇨ page 46


| Symbol | Type                     |
|--------|--------------------------|
| Nil    | Without bracket          |
| B      | L-bracket                |
| F      | Angle adjustment bracket |

#### 8 DIN rail mounting bracket for controller and high voltage power supply module ⇨ page 46

| Symbol | For Controller | For High voltage power supply module |
|--------|----------------|--------------------------------------|
| Nil    | None           | None                                 |
| U      | Included       | Included                             |
| W      | Included       | None                                 |
| Y      | None           | Included                             |

**For Individual Parts**


**How to Order**



**Combinations**

|       | Nozzle/IZTN | High voltage power supply module/IZTP | Controller/IZTC |
|-------|-------------|---------------------------------------|-----------------|
|       | 43          | 43                                    | 41              |
| IZT43 | ●           | ●                                     | ●               |

**Nozzle**

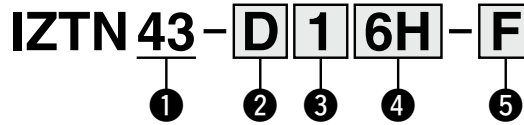

**1 Model**

| Symbol | Model   |
|--------|---------|
| 43     | AC type |

**2 Emitter cartridge type**

| Symbol | Type  |
|--------|---|
| D      | High speed static neutralization cartridge    |
| L      | Energy saving static neutralization cartridge |

**3 High voltage cable length**

| Symbol | High voltage cable length [m] |
|--------|-------------------------------|
| 1      | 1                             |
| 2      | 2                             |
| 3      | 3                             |

\* The number of included high voltage cable holders differs depending on the high voltage cable length. (Refer to the table below.)

**Number of included high voltage cable holders**  
⇒ page 46

| Symbol | IZT43    |       |
|--------|----------|-------|
|        | Straight | Elbow |
| 1      | 1        | 1     |
| 2      | 2        | 1     |
| 3      | 3        | 1     |

**4 One-touch fitting**


| Symbol | Metric size |
|--------|-------------|
| 6H     | ø6 Straight |
| 6L     | ø6 Elbow    |

| Symbol | Inch size      |
|--------|----------------|
| 7H     | ø1/4" Straight |
| 7L     | ø1/4" Elbow    |

**5 Nozzle bracket** ⇒ page 46

| Symbol | Type                     |
|--------|--------------------------|
| Nil    | Without bracket          |
| B      | L-bracket                |
| F      | Angle adjustment bracket |

**High voltage power supply module**




**1 Model**

| Symbol | Model               |
|--------|---------------------|
| 43     | AC type (For IZT43) |

**2 DIN rail mounting bracket** ⇒ page 46

| Symbol | Model    |
|--------|----------|
| Nil    | None     |
| Y      | Included |

**Controller**

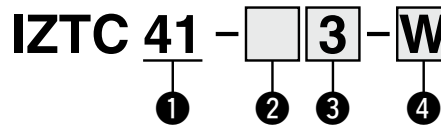

**1 Controller type**

| Symbol | Model                 |
|--------|-----------------------|
| 41     | AC type, Dual AC type |

**2 Input/Output**

| Symbol | Input/Output |
|--------|--------------|
| Nil    | NPN          |
| P      | PNP          |

**3 Power supply cable length**

| Symbol | Length [m] | Symbol | Length [m] |
|--------|------------|--------|------------|
| 3      | 3          | 15     | 15         |
| 5      | 5          | N      | None       |
| 10     | 10         |        |            |

\* To use an AC adapter, specify "N", and select the AC adapter sold separately.

**4 DIN rail mounting bracket** ⇒ page 46

| Symbol | Model    |
|--------|----------|
| Nil    | None     |
| W      | Included |

Technical Data

IZT40/41/42

IZT43

Glossary

Specific Product Precautions

# IZT43 Series

## Specifications

| Ionizer model                                   |   | IZT43 (NPN)  | IZT43 (PNP)   |
|---|---|--|---|
| <b>Ion generation method</b>                    |   | Corona discharge type  |   |
| <b>Method of applying voltage</b>               |   | AC, DC*1   |   |
| <b>Applied voltage</b>                          |   | ±6000 V  |   |
| <b>Offset voltage*2</b>                         |   | Within ±30 V   |   |
| <b>Air purge</b>                                | <b>Fluid</b>  | Air (Clean dry air)  |   |
|   | <b>Operating pressure</b>                                 | 0.7 MPa or less  |   |
|   | <b>Connecting tube size<br/>(One side can be plugged)</b> | Metric size: ø6<br>Inch size: ø1/4"  |   |
| <b>Current consumption</b>                      |   | 0.4 A or less<br>(+0.4 A or less per ionizer when connected)   |   |
| <b>Power supply voltage</b>                     |   | 24 VDC ±10%<br>(100 to 240 VAC: AC adapter option: Applicable when only one nozzle is used)  |   |
| <b>Input signal</b>                             | <b>Ion generation stop signal</b>                         | Connected to DC (-)<br>Voltage range: 5 VDC or less<br>Current consumption: 5 mA or less   | Connected to DC (+)<br>Voltage range: 19 VDC to power supply voltage<br>Current consumption: 5 mA or less |
| <b>Output signal</b>                            | <b>Maintenance detection signal</b>                       | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)<br>Max. applied voltage: 26.4 VDC                                   | Max. load current: 100 mA<br>Residual voltage: 1 V or less<br>(Load current at 100 mA)                    |
|   | <b>Error signal</b>                                       |  |   |
| <b>Function</b>                                 |   | Auto balance, Maintenance detection, High voltage abnormality detection (Ion generation stops when abnormality is detected), and Ion generation stop input |   |
| <b>Effective static neutralization distance</b> |   | 50 to 2000 mm  |   |
| <b>Ambient and fluid temperatures</b>           | <b>Controller</b>   | 0 to 40°C  |   |
|   | <b>High voltage power supply module</b>                   |  |   |
| <b>Nozzle</b>                                   |   |  |   |
| <b>Ambient humidity</b>                         |   | 35 to 65% Rh (No condensation)   |   |
| <b>Material</b>                                 | <b>Controller</b>   | Cover: ABS, Aluminum, Switch: Silicone rubber  |   |
|   | <b>High voltage power supply module</b>                   | Cover: ABS, Aluminum   |   |
|   | <b>Nozzle</b>   | Housing: PBT, Stainless steel, Emitter cartridge: PBT, Emitter: Tungsten,<br>High voltage cable: Silicone rubber, PVC, Stainless steel                     |   |
| <b>Standards/Directive</b>                      |   | CE (EMC Directive)   |   |

\*1 Apply cathode or anode to DC.

\*2 When the air purge is performed between a charged object and an ionizer at a distance of 300 mm

### Weight [g]

|              | Controller | High voltage power supply module |
|--------------|------------|----------------------------------|
| <b>IZT43</b> | 210        | 680                              |

### Nozzle Weight [g]


| Nozzle       |                                 |     |
|--------------|---------------------------------|-----|
| <b>IZT43</b> | <b>High voltage cable (1 m)</b> | 200 |
|              | <b>High voltage cable (2 m)</b> | 310 |
|              | <b>High voltage cable (3 m)</b> | 440 |

### AC Adapter (Sold Separately) ⇨ page 47

| Model                      | IZT40-CG1, IZT40-CG2           |
|----------------------------|--------------------------------|
| <b>Input voltage</b>       | 100 to 240 VAC, 50/60 Hz       |
| <b>Output current</b>      | 1.9 A                          |
| <b>Ambient temperature</b> | 0 to 40°C                      |
| <b>Ambient humidity</b>    | 35 to 65% Rh (No condensation) |
| <b>Weight</b>              | 375 g                          |
| <b>Standards/Directive</b> | CE, cUL                        |

## Construction

### IZT43 series

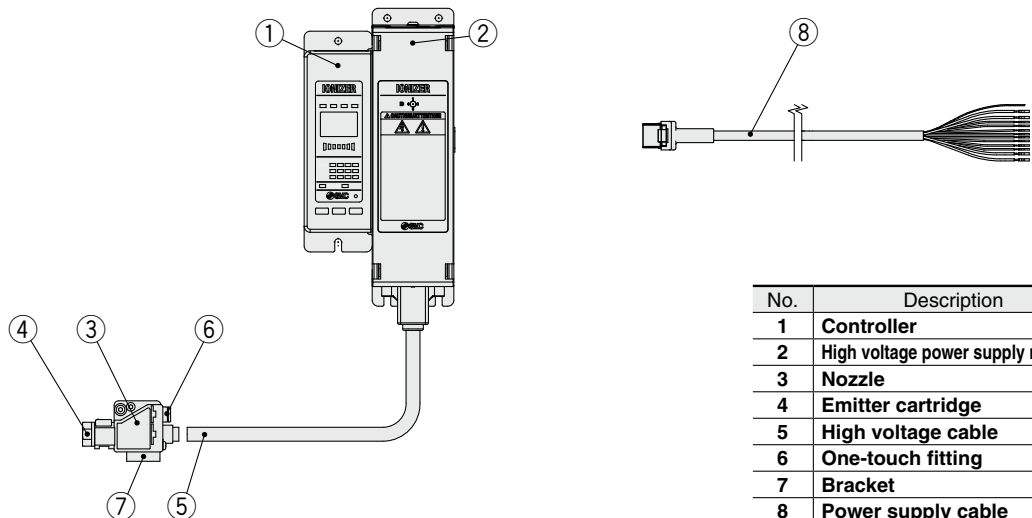

| No.      | Description                             |
|----------|---|
| <b>1</b> | <b>Controller</b>                       |
| <b>2</b> | <b>High voltage power supply module</b> |
| <b>3</b> | <b>Nozzle</b>                           |
| <b>4</b> | <b>Emitter cartridge</b>                |
| <b>5</b> | <b>High voltage cable</b>               |
| <b>6</b> | <b>One-touch fitting</b>                |
| <b>7</b> | <b>Bracket</b>                          |
| <b>8</b> | <b>Power supply cable</b>               |

**Accessories (for Individual Parts)**

**Emitter cartridge (For IZT43)**

**IZT43 - N D**

- Emitter cartridge type/  
Emitter material

| Symbol | Type  | Material |
|--------|---|----------|
| D      | High speed static neutralization cartridge    | Tungsten |
| L      | Energy saving static neutralization cartridge | Tungsten |



**Tungsten**  
(Color: White)


| Cartridge color | Emitter material |
|-----------------|------------------|
| White           | Tungsten         |

**Nozzle bracket (For IZT43)**


**IZT43 - B L1**

- Nozzle bracket

| Symbol | Type                     |
|--------|--------------------------|
| L1     | L-bracket                |
| L2     | Angle adjustment bracket |

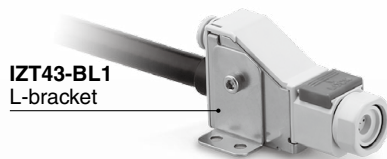

**IZT43-BL1**  
L-bracket

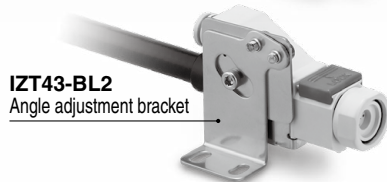

**IZT43-BL2**  
Angle adjustment bracket

**Power supply cable**

**IZT40 - CP 3**

- Power supply cable length

| Symbol | Length [m] |
|--------|------------|
| 3      | 3          |
| 5      | 5          |
| 10     | 10         |
| 15     | 15         |

Cable specifications  
⇒ page 54



**DIN rail mounting bracket for controller and high voltage power supply module**

**IZT40 - B 1**

- DIN rail mounting bracket


| Symbol | Type                                 |
|--------|--------------------------------------|
| 1      | For Controller                       |
| 2      | For High voltage power supply module |

For Controller

For High voltage power supply module



**IZT40-B1**



**IZT40-B2**

**High voltage cable holder**

**IZT40 - E 1**

- High voltage cable holder

| Symbol | Type     |
|--------|----------|
| 1      | Straight |
| 2      | Elbow    |

Straight

Elbow



**IZT40-E1**



**IZT40-E2**

# IZT43 Series

## Accessories Sold Separately

### Body assembly (For IZT43)

**IZT43 - A001 - D 6H**

#### Emitter cartridge type

| Symbol   | Type  |
|----------|---|
| <b>D</b> | High speed static neutralization cartridge    |
| <b>L</b> | Energy saving static neutralization cartridge |

#### One-touch fitting

| Symbol    | Metric size |
|-----------|-------------|
| <b>6H</b> | ø6 Straight |
| <b>6L</b> | ø6 Elbow    |

| Symbol    | Inch size      |
|-----------|----------------|
| <b>7H</b> | ø1/4" Straight |
| <b>7L</b> | ø1/4" Elbow    |



### High voltage cable assembly (For IZT43)

**IZT43 - A002 - 1**

#### High voltage cable length

| Symbol   | Length [m] |
|----------|------------|
| <b>1</b> | 1          |
| <b>2</b> | 2          |
| <b>3</b> | 3          |



### AC adapter

**IZT40 - CG 1**

#### AC adapter

| Symbol   | Type            |
|----------|-----------------|
| <b>1</b> | With AC cord    |
| <b>2</b> | Without AC cord |

\* AC cord is only for use in Japan. (Rated voltage 125 V, Plug JIS C 8303, Inlet IEC 60320-C6) External input and output cannot be used when the AC adapter is being used.



AC adapter

### Separate cable

**IZT40 - CF 1**

#### Separate cable length

| Symbol   | Length [m] |
|----------|------------|
| <b>1</b> | 1          |
| <b>2</b> | 2          |
| <b>3</b> | 3          |



### Cleaning kit (For IZT43)

**IZT43 - M2**



Replacement felt pad: IZT43-A003

Replacement rubber grindstone: IZT43-A004



## Wiring: IZT43

### IZT43

| Cable color | Signal name                    | Signal direction | Description  |
|-------------|--------------------------------|------------------|--|
| Brown       | DC (+)                         | IN               | Connect the power supply to operate the ionizer.   |
| Blue        | DC (-)                         | IN               |  |
| Green       | F.G.                           | —                | Make sure to ground with 100 Ω or less to use it as a reference electric potential for ionizer.  |
| Pink        | Ion generation stop signal CH1 | IN               | Signal input to turn ON/OFF ion generation of each bar (CH1 to 4).<br>NPN specification: Stops generating ions by connecting to 0 V. (Starts generating ions when disconnected.)<br>PNP specification: Stops generating ions by connecting to +24 VDC. (Starts generating ions when disconnected.) |
| Gray        | Ion generation stop signal CH2 | IN               |  |
| Yellow      | Ion generation stop signal CH3 | IN               |  |
| Purple      | Ion generation stop signal CH4 | IN               |  |
| White       | Maintenance detection signal   | OUT (A contact)  | Turns ON when emitters need cleaning.  |
| Black       | Error signal                   | OUT (B contact)  | Turns OFF in case of power supply failure, high voltage failure, CPU failure, communication failure, cooling fan motor failure, output signal overcurrent, or inconsistent or CH setting duplication or non-connection of high voltage power supply module (ON when there is no problem).          |
| Orange      | —                              | —                | —  |



\* Refer to the power supply cable dimensions on page 54 for the cable specifications.

### Frequencies

| Series         | IZT43  |
|----------------|--------|
| Controller     | IZTC41 |
| Frequency [Hz] | 1      |
|                | 3      |
|                | 5      |
|                | 8      |
|                | 10     |
|                | 15     |
|                | 20     |
|                | 30     |
|                | DC+    |
|                | DC-    |


# IZT43 Series

## Wiring Circuit: IZT43

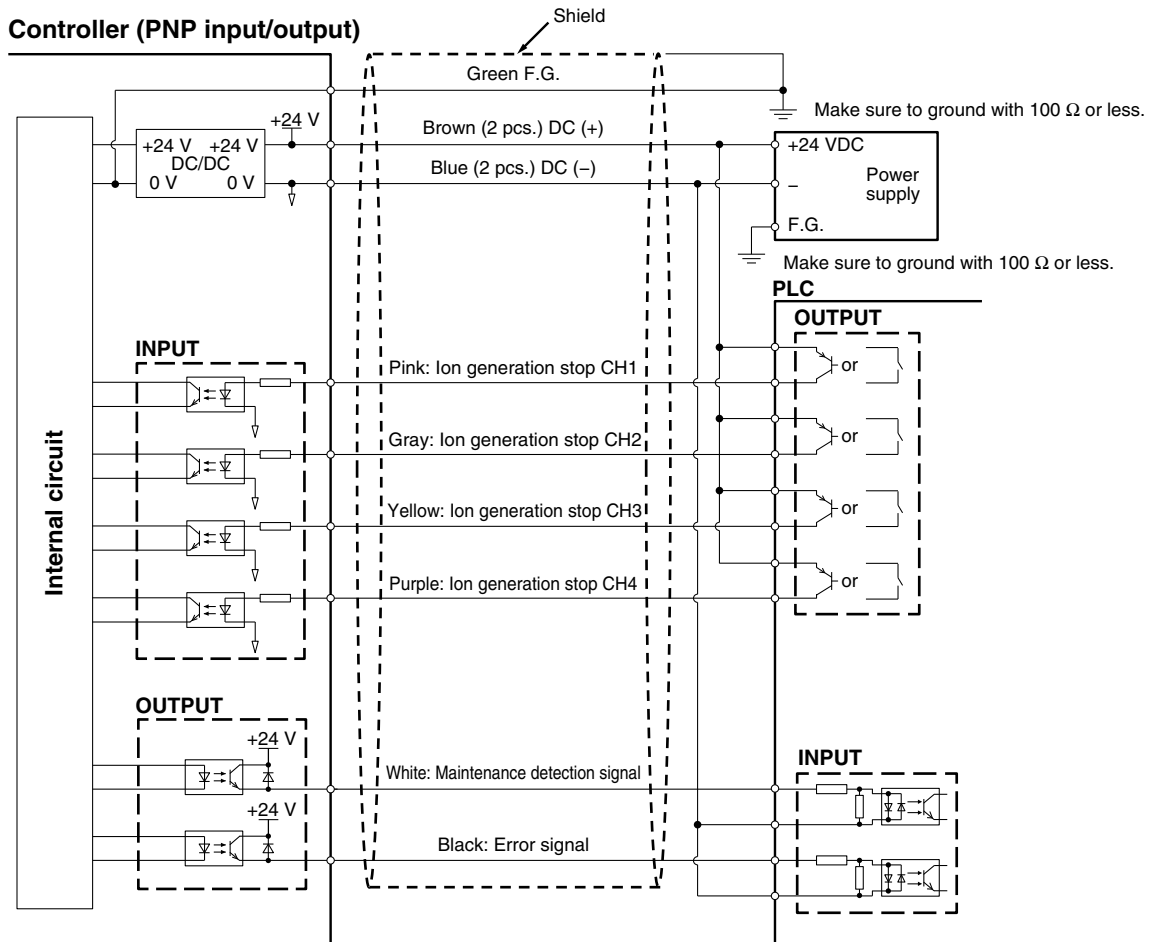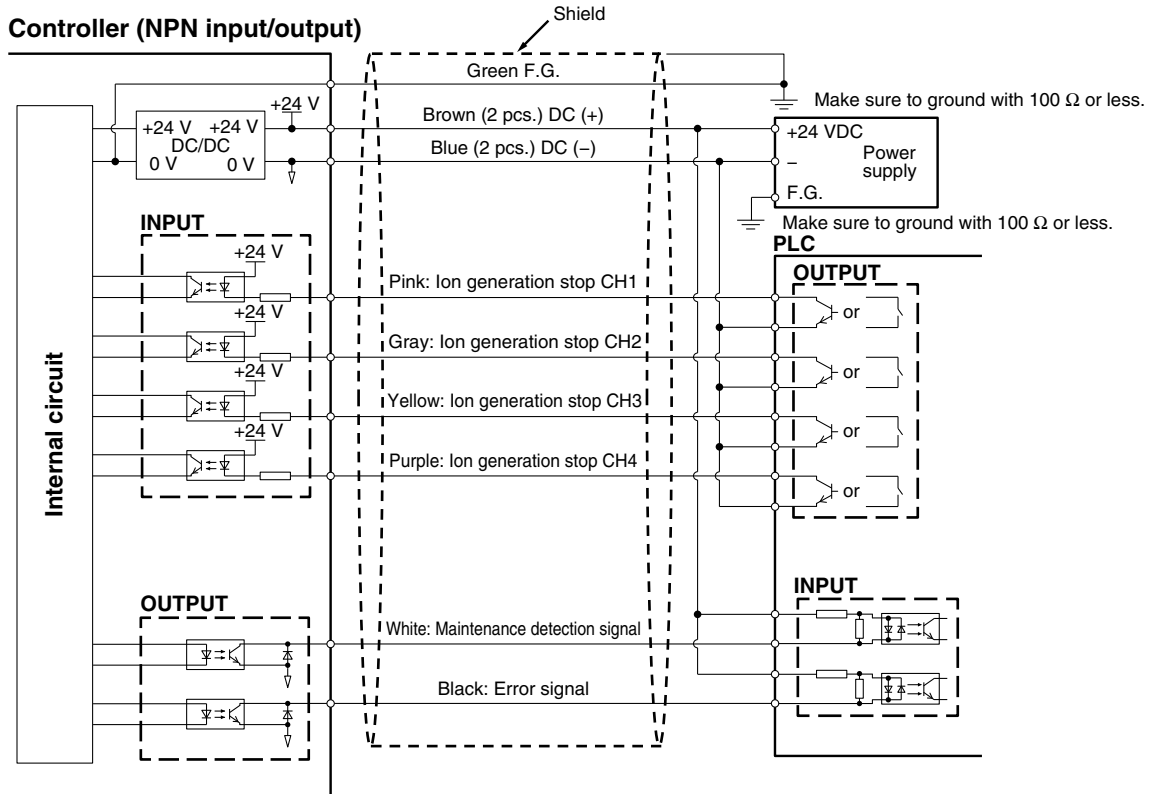

**Dimensions**

**Ionizer IZT43**

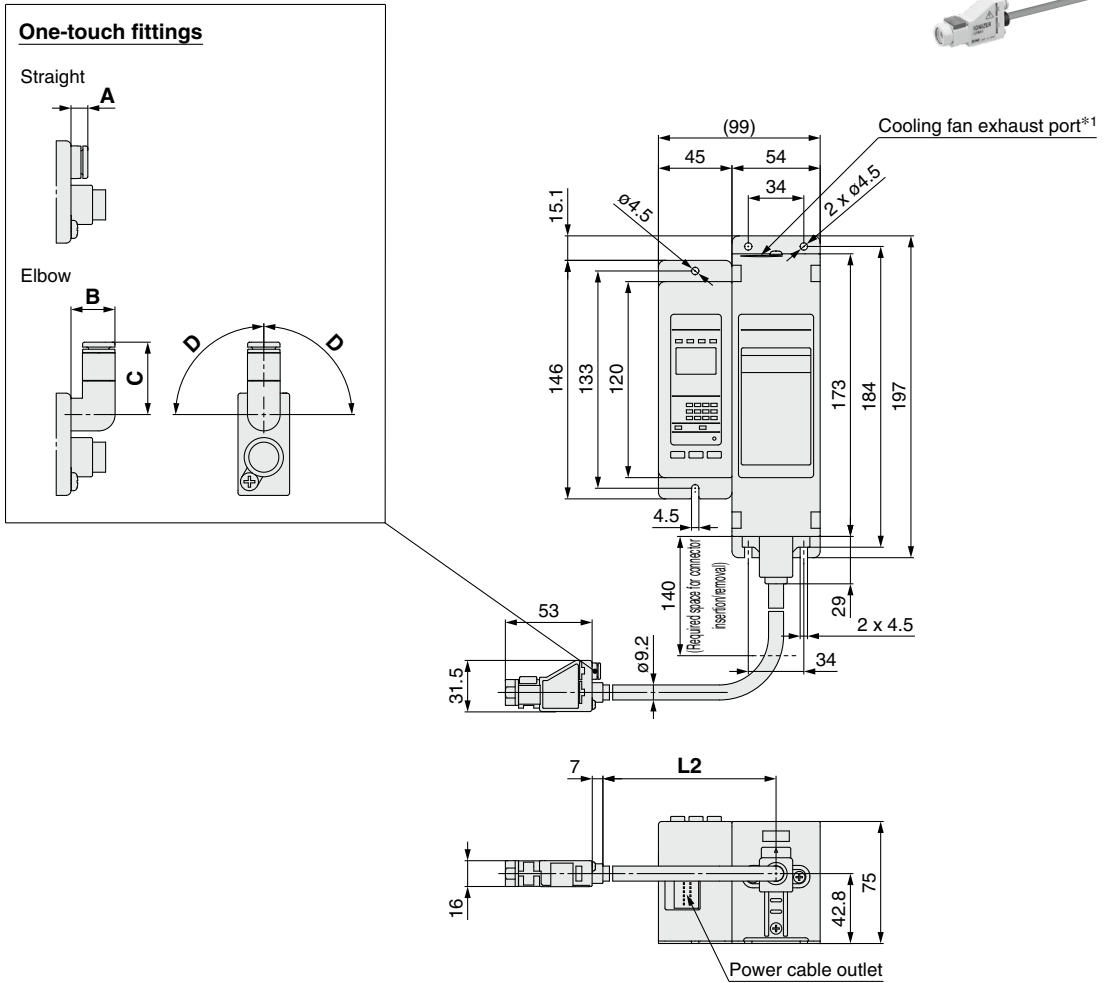

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

**High Voltage Cable Length L2**

| Symbol | L2 [mm] |
|--------|---------|
| 1      | 1000    |
| 2      | 2000    |
| 3      | 3000    |

**One-touch Fittings**

| Straight      |                        | [mm] |
|---------------|------------------------|------|
|               | Applicable tubing O.D. | A    |
| <b>Metric</b> | ø6                     | 7    |
| <b>Inch</b>   | ø1/4"                  | 10   |

| Elbow         |                        | [mm] |    |      |
|---------------|------------------------|------|----|------|
|               | Applicable tubing O.D. | B    | C  | D    |
| <b>Metric</b> | ø6                     | 14   | 23 | 105° |
| <b>Inch</b>   | ø1/4"                  | 14   | 26 | 105° |

Technical Data

IZT40/41/42

IZT43


Glossary

Specific Product Precautions


# IZT43 Series

## Dimensions


### L-bracket IZT43-BL1

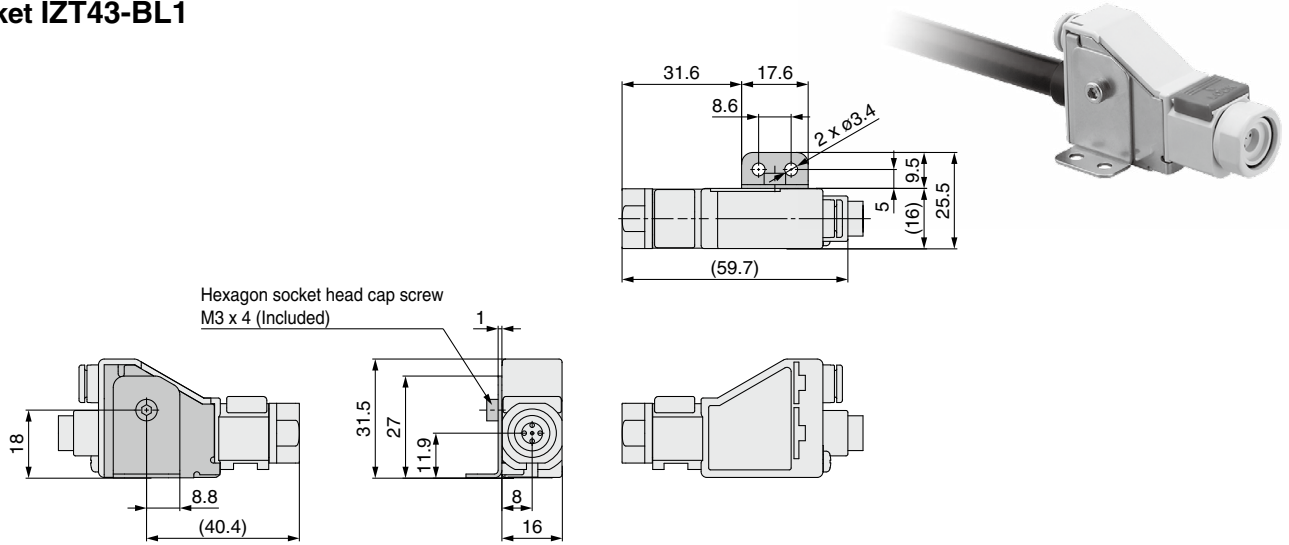

### Angle adjustment bracket IZT43-BL2





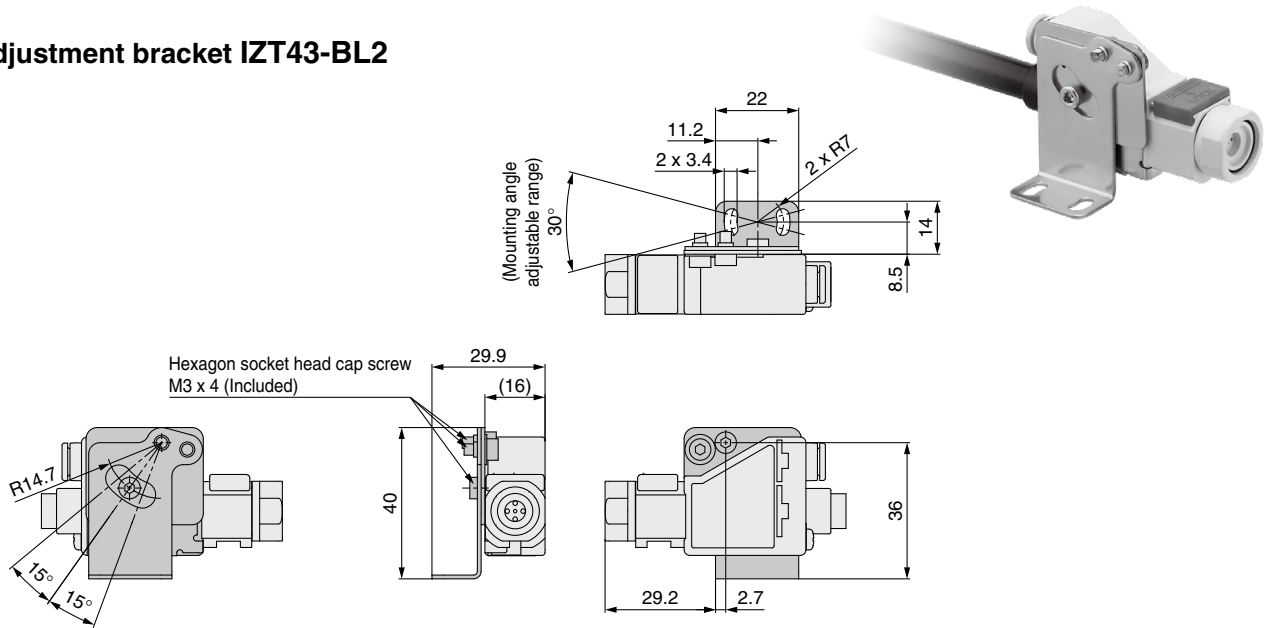


#### When adjusting the angle

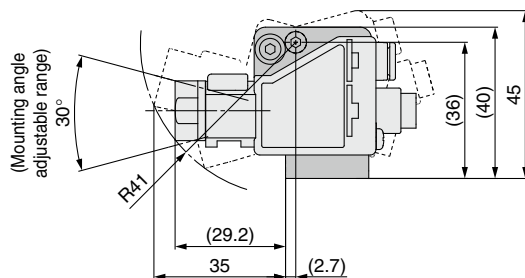




## Dimensions

### Controller

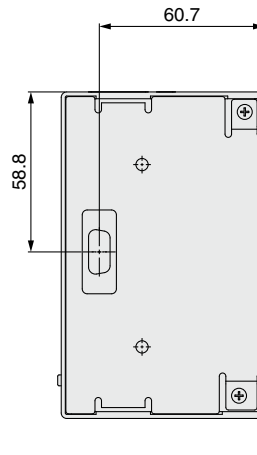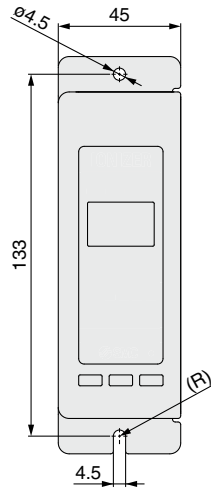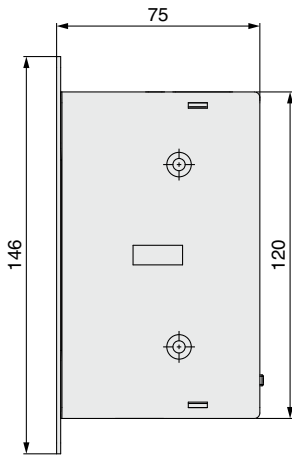

When a power supply cable is inserted

When a DIN rail mounting bracket (IZT40-B1) is used

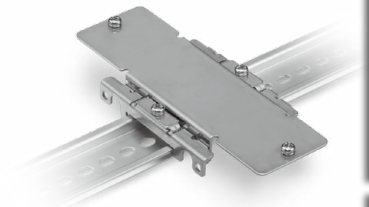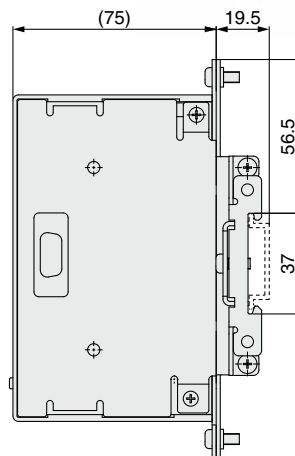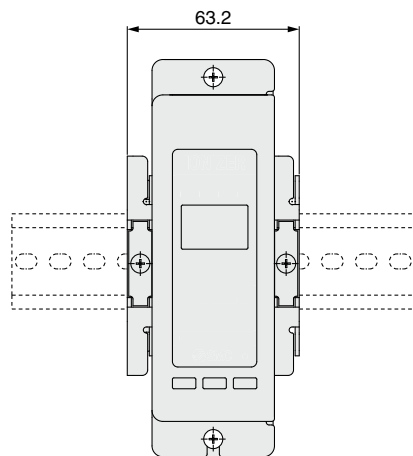

Technical Data

IZT40/41/42

IZT43



Glossary

Specific Product Precautions


# IZT43 Series

## Dimensions


### High voltage power supply module for IZT43

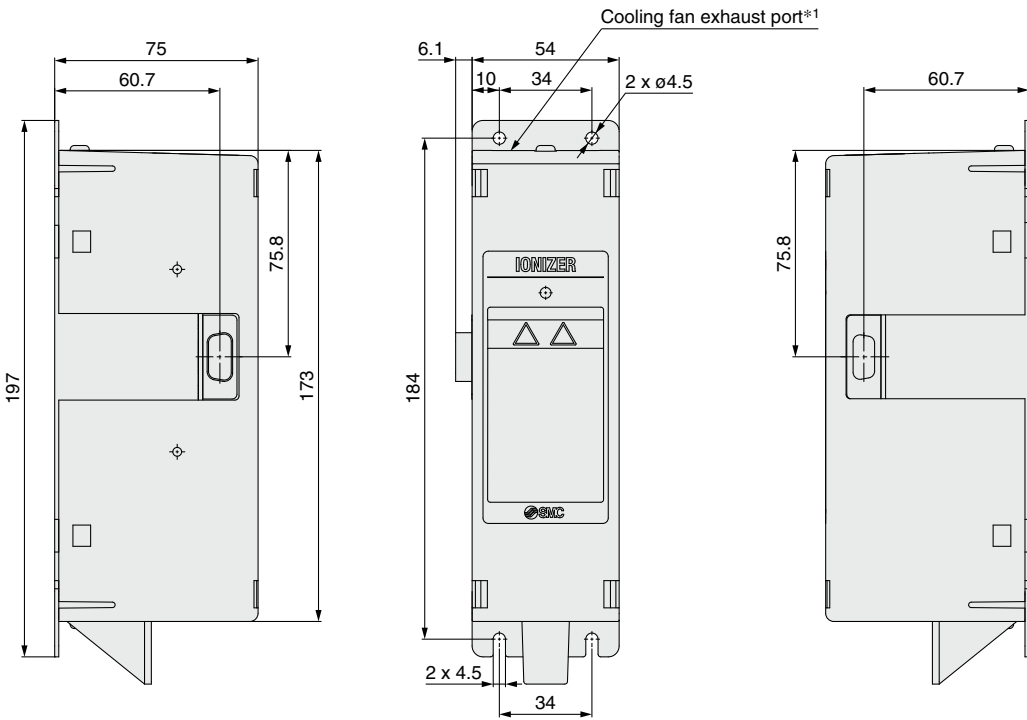

\*1 Refer to Mounting (12) in the Specific Product Precautions (page 59).

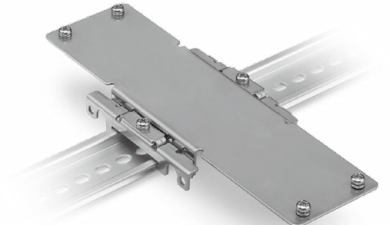


### When a DIN rail mounting bracket (IZT40-B2) is used

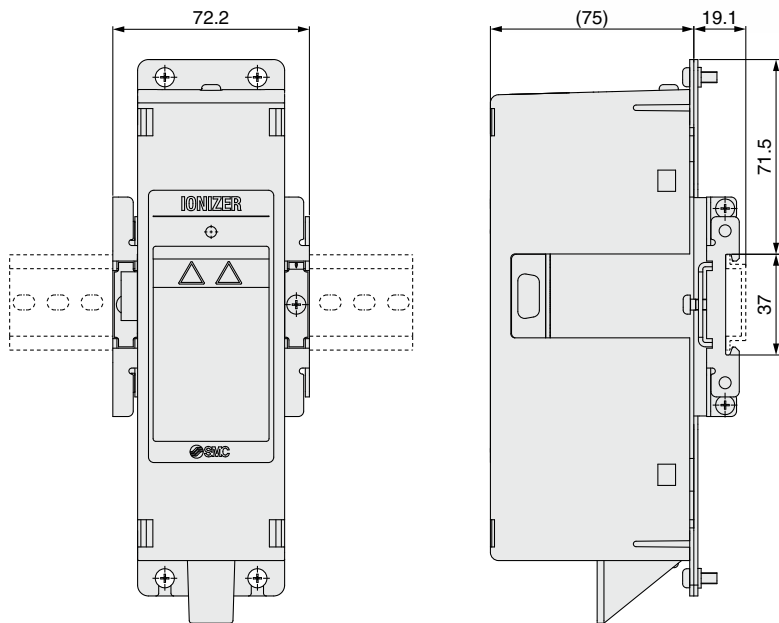

**Dimensions**

**Power supply cable**

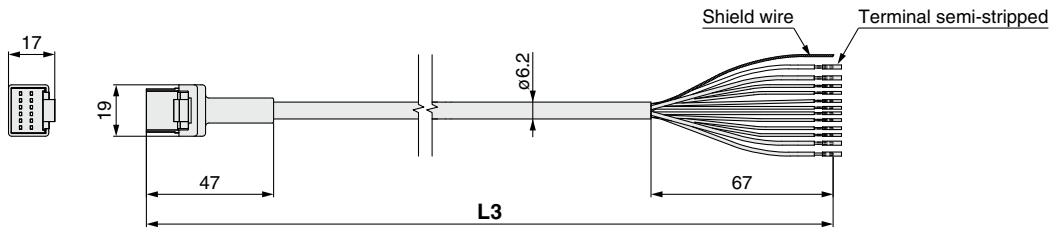


**Cable Length L3**

| Part number       | L3 [mm] |
|-------------------|---------|
| <b>IZT40-CP3</b>  | 2950    |
| <b>IZT40-CP5</b>  | 5000    |
| <b>IZT40-CP10</b> | 9800    |
| <b>IZT40-CP15</b> | 15000   |

**Cable Specifications**

|                         |   |  |
|-------------------------|---|--|
| No. of cable wires/Size | 12 cores/AWG20 (4 cores), AWG28 (8 cores) |  |
| Conductor               | Nominal cross section                     | 0.54 mm <sup>2</sup> (4 cores), 0.09 mm <sup>2</sup> (8 cores)                       |
|                         | O.D.                                      | 0.96 mm (4 cores), 0.38 mm (8 cores)   |
| Insulator               | O.D.                                      | 1.4 mm Brown, Blue<br>0.7 mm White, Green, Pink, Purple, Gray, Yellow, Orange, Black |
|                         | Material                                  | Lead-free PVC  |
| Sheath                  | O.D.                                      | 6.2 mm   |


**Separate cable IZT40-CF**

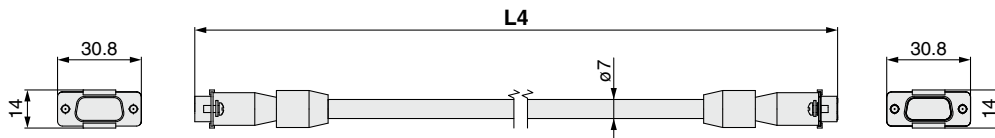

**Cable Length L4**

| Part number      | L4 [mm] |
|------------------|---------|
| <b>IZT40-CF1</b> | 1000    |
| <b>IZT40-CF2</b> | 2000    |
| <b>IZT40-CF3</b> | 3000    |


**When a separate cable is used**

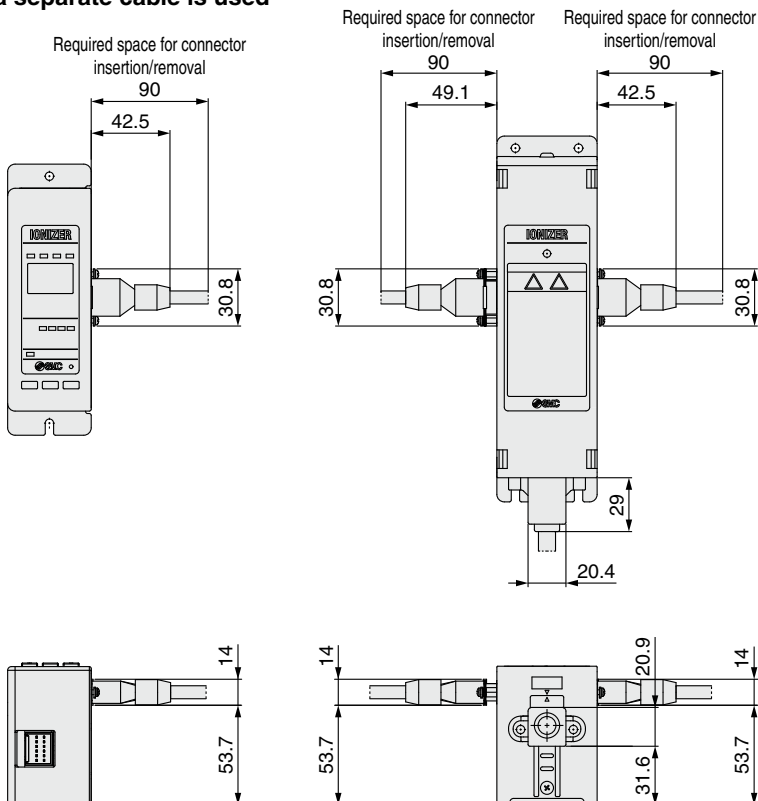

# IZT43 Series

## Dimensions

### High voltage cable assembly IZT43-A002-□

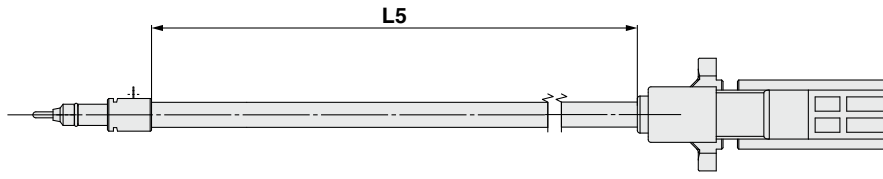


#### Cable Length L5

| Part number  | L5 [mm] |
|--------------|---------|
| IZT43-A002-1 | 1000    |
| IZT43-A002-2 | 2000    |
| IZT43-A002-3 | 3000    |


### High voltage cable holder

#### Straight IZT40-E1

##### Cross-sectional view A-A

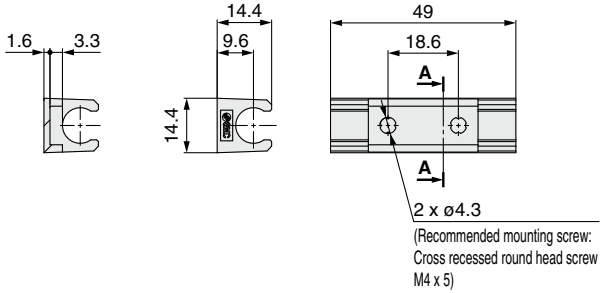

#### Elbow IZT40-E2

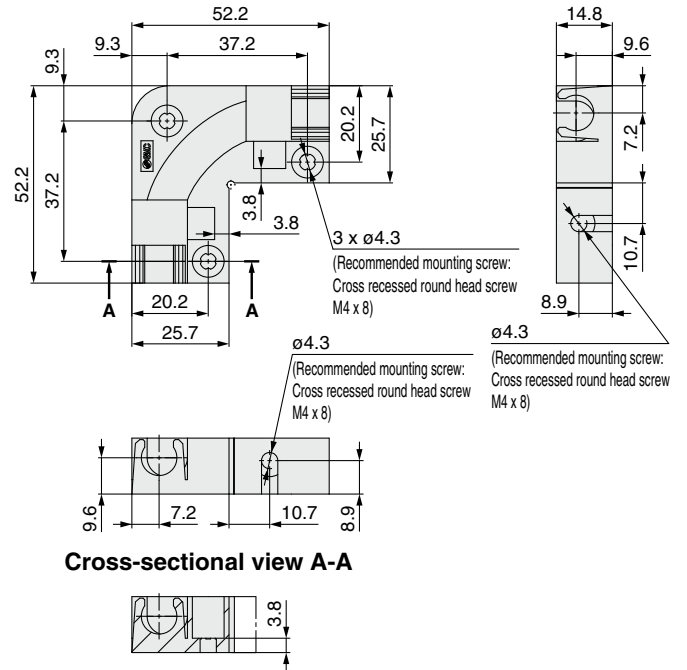




# IZT40/41/42/43 Series

## Glossary

### 1 Discharge Time

Time required for the voltage (attributed to static electric charge) attenuating from an initial value to the arbitrarily selected final value [JIS C 61340-4-7]

The graph shows the time required for the charged plate voltage being discharged from 1000 V to 100 V.

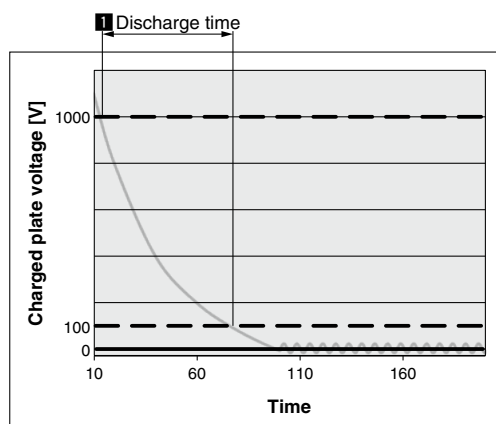

### 2 Offset Voltage

Voltage which can be measured from the insulated conductive charged plate mounted to the charged plate monitor in the ionized atmosphere [JIS C 61340-4-7]

This catalog shows the average offset voltage between 1 and 2 minutes after starting the measurement.


### 3 Peak Offset Voltage

The peak voltage of the pulse voltage type ionizer when considering the offset value of each polarity as an absolute value when the offset voltage fluctuates to the positive and negative side periodically, based on the periodical fluctuation of the ion output from positive to negative [JIS C 61340-4-7]

### 4 Potential Amplitude

The p-p voltage value is measured by the charged plate using the AC method in which positive and negative ion output fluctuates periodically. [SMC technical term]

The voltage is measured between 1 and 2 minutes after starting the measurement, and the difference between the maximum and minimum values is indicated.

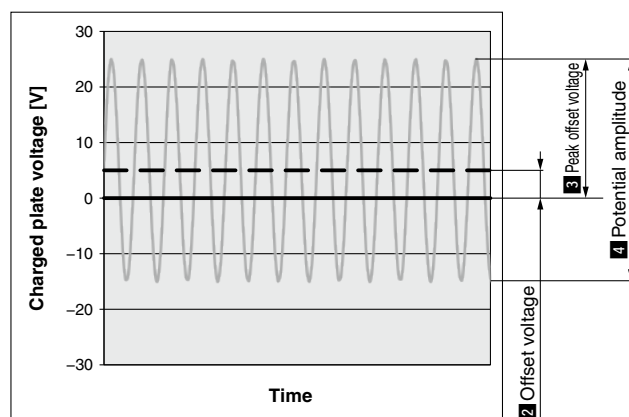



## I/ZT40/41/42/43 Series

# Specific Product Precautions 1

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.

### Selection

#### Warning

- 1. This product is intended to be used with general factory automation (FA) equipment.**
  - If considering using the product for other applications (especially those indicated in Warning (4) on the back cover), please consult with SMC beforehand.
- 2. Use this product within the specified voltage and temperature range.**
  - Using outside of the specified voltage can cause a malfunction, damage, electrical shock, or fire.
- 3. Use clean compressed air as fluid. (Compressed air quality of Class 2.4.3., 2.5.3., 2.6.3 or higher according to ISO 8573-1:2010 (JIS B 8392-1:2012) is recommended for operation.)**
  - This product is not explosion proof. Never use a flammable gas or an explosive gas as a fluid and never use this product in the presence of such gases.
  - Please contact us when fluids other than compressed air are used.
- 4. This product is not explosion-protected.**
  - Never use this product in locations where the explosion of dust is likely to occur or flammable or explosive gases are used. This can cause a fire.

#### Caution

- 1. Clean specification is not available with this product.**
  - A minute amount of particles are generated due to wearing of the emitters while the product is operating.
  - When bringing into a clean room, confirm the required cleanliness before use.

### Mounting

#### Warning

- 1. Reserve enough space for maintenance, piping, and wiring.**
  - Please take into consideration that the connector connecting part, plug connecting part, and One-touch fittings for supplying air need enough space for the cable and air tubing to be easily attached/detached.
  - To avoid unreasonable stress applied to the connector mounting part, plug connecting part, and One-touch fitting mounting part, bending of the cable or air tubing should be more than the minimum bending radius.
  - If the cable is bent in an acute angle or load is applied to the cable repeatedly, it may cause a malfunction, wire damage or fire.  
[Minimum bending radius] Power supply cable: 40 mm  
Separate cable (Option): 40 mm  
High voltage cable: 30 mm

\* Shown above is wiring with the fixed minimum allowable bending radius and at a temperature of 20°C. A bend radius should be larger at a temperature lower than 20°C. Regarding the minimum bending radius of the air tubing, refer to the operation manual or catalog for air tubing.
- 2. Installation of the high voltage cable**
  - Use the specified cable holder (IZT40-E1 or IZT40-E2) for installing high voltage cables.
  - Follow the instructions below when installing high voltage cables. If these are not followed, the insulation performance of the high voltage cable will decrease, causing failure of the ionizer, which may lead to electrical shock or fire.
    - a. Do not cut the cable.
    - b. Keep to the minimum bending radius of the cable.
    - c. Do not tighten the cable too much with cable ties. Do not deform the cable by placing any object on the cable.
    - d. Avoid the problems of cable runaway such as in a cable duct.
    - e. Do not twist or damage the cable. If the cable is damaged, it should be replaced.



# IZT40/41/42/43 Series

## Specific Product Precautions 2

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.

### Mounting

#### Warning

##### 3. Fix the high voltage cable connector using 2 screws included as an accessory.

- Fix the connector using 2 cross recessed round head screws (M4 x 10 L) with the specified tightening torque. (Refer to the table below.)

##### 4. Be sure to fix the high voltage cable plug with a screw.

##### 5. Mount on a flat surface and do not apply impact load or excessive external force.

- If there are irregularities, cracks or height differences, excessive stress will be applied to the housing or brackets, resulting in damage or other trouble.
- Do not drop or apply a strong shock. Otherwise, damage or an accident can occur.

##### 6. Install the product so that the bar does not have an excessive deflection.

- For a bar length of 820 mm or more, be sure to support the bar at both ends and in the middle by using brackets (IZT40-BM1 or IZT40-BM2). If the bar is held only at the both ends, self-weight of the bar causes deflection, resulting in damage or deformation of the bar.

##### 7. Avoid using in a place where noise (electromagnetic wave surge) is generated.

- If the product is used in an environment where noise is generated, it may lead to a malfunction and deterioration or damage of the internal elements.
- If the presence of noise is suspected, take preventative measures against noise and avoid crossing wires such as power line and high voltage line.

##### 8. Tighten screws with the specified tightening torque.

- If the mounting screws are tightened in excess of the specified torque range, it may damage the screws or mounted areas.
- If the tightening torque is insufficient, the screws may become loose. (Refer to the table below.)


##### 9. Do not touch the emitter directly with fingers or metallic tools.

- Do not touch the emitter with your finger. If the needle sticks to your finger, an electrical shock can cause an instantaneous rapid body motion to escape from the shock, causing injury.
- If the emitter or cartridge is damaged with a tool, the specification will not be met and damage and/or an accident may occur.


#### Danger High Voltage

The emitter carries a high voltage. If foreign matter is inserted or there is human contact with the emitter, an electrical shock, or an instantaneous body reaction to escape from the shock, can cause injury.

Bar

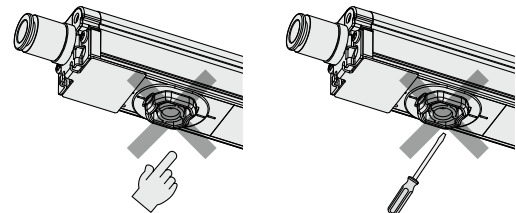

Nozzle

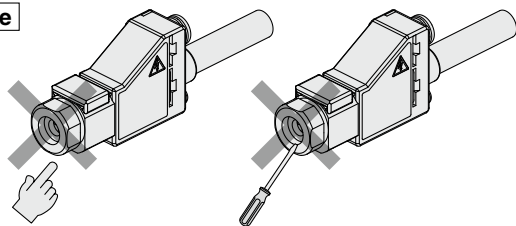

#### Tightening Torque for Screws

| Description             |                              | Part number      | Screw                         | Tightening torque |
|-------------------------|------------------------------|------------------|-------------------------------|-------------------|
| For Bar                 | End bracket                  | IZT40-BE□        | For fixed angle M4 x 8 L      | 0.72 to 0.76 N·m  |
|                         |                              |                  | For fixed bar M4 x 8 L        | 0.51 to 0.55 N·m  |
|                         | Intermediate bracket 1       | IZT40-BM1        | M4 x 16 L                     | 0.72 to 0.76 N·m  |
|                         | Intermediate bracket 2       | IZT40-BM2        | M4 x 16 L                     | 0.47 to 0.49 N·m  |
|                         | High voltage cable connector | IZTB4□-□□□□□-□-□ | M4 x 10 L                     | 0.49 to 0.53 N·m  |
| For Nozzle              | L-bracket                    | IZT43-B1         | M3 x 4 L                      | 0.61 to 0.65 N·m  |
|                         | Angle adjustment bracket     | IZT43-B2         | For fixed angle M3 x 4 L      | 0.61 to 0.65 N·m  |
|                         |                              |                  | For fixed nozzle M3 x 4 L     | 0.61 to 0.65 N·m  |
|                         | High voltage cable connector | IZTN43-□□□□-□    | M4 x 10 L                     | 0.49 to 0.53 N·m  |
| High voltage cable plug | M3 x 5 L                     |                  | 0.11 to 0.15 N·m              |                   |
|                         | Controller                   | IZTC40<br>IZTC41 | M4 x 30 L                     | 0.22 to 0.24 N·m  |
|                         | Separate cable               | IZT40-CF□        | Spacer                        | 0.40 to 0.60 N·m  |
|                         |                              |                  | Set screw                     | 0.25 to 0.35 N·m  |
|                         | DIN rail mounting bracket    | IZT40-B□         | M4 x 6 L                      | 1.30 to 1.50 N·m  |
|                         | Cable holder                 | IZT40-E□         | M4 x 8 L (Recommended length) | 0.19 to 0.21 N·m  |



# IZT40/41/42/43 Series Specific Product Precautions 3

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.

## Mounting

### Warning


**10. Do not affix any tape or seals to the controller, high voltage power supply module, bar, and nozzle.**

- If the tape or label contains a conductive adhesive or reflective paint, a dielectric phenomenon may occur due to ions arising from such substances, resulting in electrostatic charging or electric leakage, causing a malfunction, damage, electric shock or fire.

**11. Installation should be conducted after turning off the power supply and air supply to the controller, high voltage power supply module, bar, and nozzle.**

- If installation or adjustment is performed power or air supplied, electric shock, failure or injury can result.

**12. The high voltage power supply module uses a fan. A space of 20 mm or more is required from the exhaust port for ventilation. Install the product in a ventilated location so peripheral devices are not affected.**

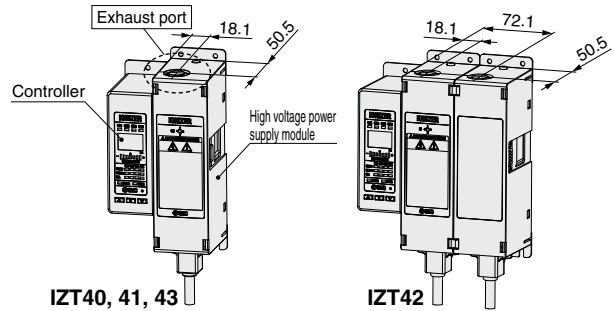

**13. Do not apply any excessive force to cables, such as repeated bending, tensioning, or placing a heavy object on the cables.**

- It may cause an electric shock, fire, or the breaking of a wire.


**14. Do not carry the product by holding its cables.**

- It may cause an injury or damage to the product.

### Caution

**1. When the IZT40, IZT41, IZT42, or IZT43 series is installed, maintain a space from structures or components.**

- If there are electrically conductive objects such as walls or structures close to the bar, generated ions may not reach the target object effectively or product failure or electric shock can result due to dielectric or short-circuit.

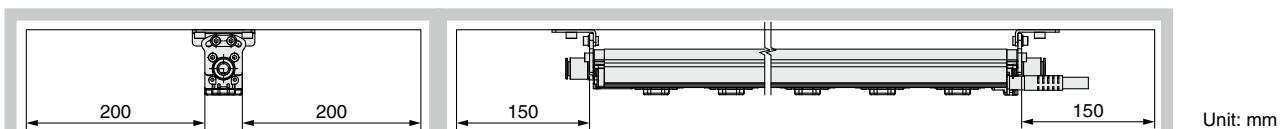


**2. Make sure to confirm the effect of static neutralization after installation.**


- The performance of the product varies depending on the surrounding installation and operating conditions. After installation, verify the effects of static neutralization.

**3. When installing the IZT41, IZT42, or IZT43 in proximity with an ionizer which operates in DC mode (one polarity, positive or negative), they should be positioned at least 2 meters away from each other.**

- When using the AC mode of the IZT41, IZT42, or IZT43 near the ionizer in DC mode, keep clearance of at least the length shown in the figure below between them. The offset voltage (ion balance) may not be adjusted by the built-in sensor due to the ions discharged from the DC mode ionizer.

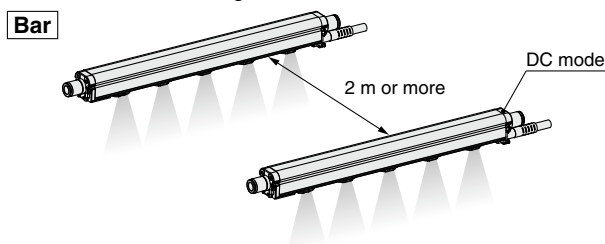

**Nozzle**

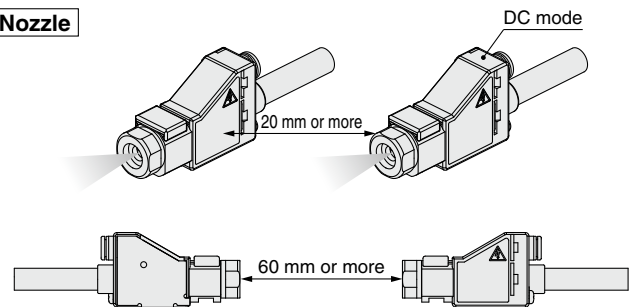

**4. Use the specified bracket.**



# IZT40/41/42/43 Series

## Specific Product Precautions 4

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.

### Wiring / Piping

#### Warning

1. Before wiring, ensure that the power supply capacity is larger than the specification and that the voltage is within the specification. Product damage or malfunction can result.
2. To maintain product performance, the power supply shall be UL listed Class 2 certified by National Electric Code (NEC) or evaluated as a limited power source provided by UL60950.
3. To maintain the product performance, ground the product with an earth ground cable with a resistance of 100 Ω or less. If the product is not grounded, it is not possible to secure the performance and may lead to product failure or malfunction.
4. Wiring (including insertion and removal of the connector plug (high voltage cable connector, high voltage cable plug)) should never be carried out with the power supply ON. Otherwise, an electrical shock or accident may occur.
5. Use the specified cable for connecting the ionizer controller, high voltage power supply module, bar, and nozzle. Do not disassemble or retrofit. Modifying the product may cause accidents such as electric shock, failure or fire. The product will not be guaranteed if it is disassembled and/or modified.
6. Ensure the safety of wiring and surrounding conditions before supplying power.
7. Do not connect or disconnect the connector plug (including power source) while the power is supplied. Failure to follow this procedure may cause product malfunction.
8. If the ionizer wiring and high power lines are routed together, this product may malfunction due to noise. Therefore, use a separate wiring route for this product.
9. Confirm that the wiring is correct before operation. Incorrect wiring will lead to product damage or malfunction.
10. Flush the piping before use. Before piping this product, exercise caution to prevent particles, water drops, or oil contents from entering the piping.

### Operating Environment / Storage Environment

#### Warning

1. Observe the fluid temperature and ambient temperature range.
  - Fluid temperature and ambient temperature ranges are; 0 to 40°C for controller, 0 to 40°C for high voltage power supply module, 0 to 50°C for bar, 0 to 40°C for nozzle, and 0 to 40°C for AC adapter.
  - Do not use the product in locations where the temperature may change suddenly even if the ambient temperature range is within the specified limits, resulting in condensation.

### Operating Environment / Storage Environment

#### Warning

2. Do not use this product in an enclosed space.
  - This product utilizes a corona discharge phenomenon. Avoid using in an enclosed space as ozone and nitrogen oxides exist in such places, even though in marginal quantities.
3. Environments to avoid
  - Never use or store under the following conditions. These may cause a failure, fire, etc.
    - a. Environments where the ambient temperature is outside of the product specification
    - b. Environments where the ambient humidity is outside of the product specification
    - c. Environments where abrupt temperature changes may cause condensation
    - d. Environments where corrosive gas, flammable gas or other volatile flammable substances are stored
    - e. Environments where the product may be exposed to conductive powder such as iron powder or dust, oil mist, salt, organic solvent, machining chips, particles or cutting oil (including water and any liquids), etc.
    - f. Environments where ventilated air from an air conditioner is directly applied to the product
    - g. Enclosed or poorly ventilated environments
    - h. Environments that are exposed to direct sunlight or heat radiation
    - i. Environments where strong electromagnetic noise is generated, such as strong electrical and magnetic fields or supply voltage spikes
    - j. Environments where static electricity is generated
    - k. Environments where a strong high frequency occurs
    - l. Environments that are subject to potential lightning strikes
    - m. Environments where the product may receive direct impact or vibration
    - n. Environments where the product may be subjected to forces or weight that could cause physical deformation
4. Do not use an air containing mist or dust.
  - The air containing mist or dust will cause the performance to decrease and shorten the maintenance cycle.
  - Install an air dryer (IDF series), air filter (AF/AFF series), and/or mist separator (AFM/AM series) to obtain clean compressed air (compressed air quality of Class 2.4.3., 2.5.3., 2.6.3 or higher according to ISO 8573-1:2010 (JIS B 8392-1:2012) is recommended for operation).
5. Controller, high voltage power supply module, bar, nozzle, and AC adapter are not resistant to lightning surge.
6. Effects on implantable medical devices
  - The electromagnetic waves emitted from this product may interfere with implantable medical devices such as cardiac pacemakers and cardioverter defibrillators, resulting in the malfunction of the medical device or other adverse effects.
  - Please use extreme caution when operating equipment which may have an adverse effect on your implantable medical device. Be sure to thoroughly read the precautions stated in the catalog, operation manual, etc., of your implantable medical device, or contact the manufacturer directly for further details on what types of equipment need to be avoided.

Technical Data

IZT40/41/42

IZT43

Glossary

Specific Product Precautions



# I/ZT40/41/42/43 Series

## Specific Product Precautions 5

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.

### Maintenance

#### Warning

##### 1. Periodically inspect the ionizer and clean the emitters.

- Check regularly if the product is operating with undetected failures or not.
- The maintenance must be performed by an operator who has sufficient knowledge and experience.
- If the product is used for an extended period with dust present on the emitters, the product performance will be reduced.
- An emitter dirt detection function is available with the IZT41, IZT42, and IZT43. When emitter contamination is detected, clean the emitter.
- In cases where the emitter dirt detection function is not used on the IZT41, IZT42, or IZT43, or when the IZT40 is used, perform a neutralizing performance test and set a maintenance cycle for periodic cleaning.
- The emitter contamination level is different depending on the installation environment and supply pressure.
- If the performance is not recovered after cleaning, it is possible that emitters are worn. Replace the emitter cartridge.

#### Danger High Voltage

This product contains a high voltage generation circuit. When performing maintenance inspection, be sure to confirm that the power supply to the ionizer is turned off. Never disassemble or modify the ionizer, as this may not only impair the product's functionality but could cause an electric shock or electric leakage.

##### 2. When cleaning the emitter or replacing the emitter cartridge, be sure to turn off the power supply or air supply to the controller, high voltage power supply module, bar, and nozzle.

- Never touch the emitters with the power supplied to the controller, high voltage power supply module, bar, and nozzle. Electric shock may cause injury.
- If an attempt to replace the emitter cartridges is performed before removing air supply, the emitter cartridges may eject unexpectedly due to presence of the compressed air. Remove supply air before replacing the cartridges.
- If emitter cartridges are not securely mounted to the bar, they may eject or release when air is supplied to the product.
- Securely mount or remove the emitter cartridges referencing the instructions shown to the right.
- Securely mount or remove the emitter cartridges with hands and do not use tools.

Bar type


Emitter cartridge tightening torque: 0.2 to 0.3 N·m

Nozzle type


Emitter cartridge tightening torque: 0.1 to 0.2 N·m

#### Bar

##### Removal of emitter cartridge

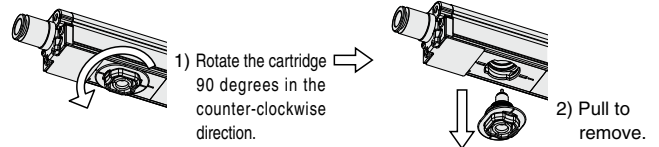


##### Mounting of emitter cartridge

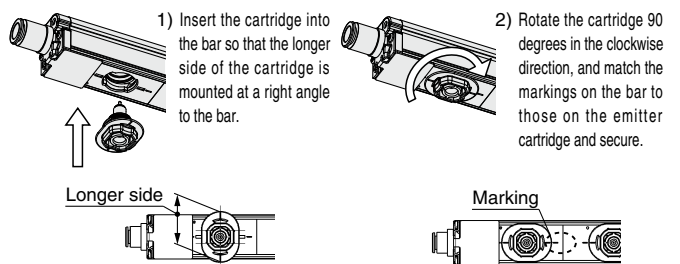


#### Nozzle

##### Removal of emitter cartridge

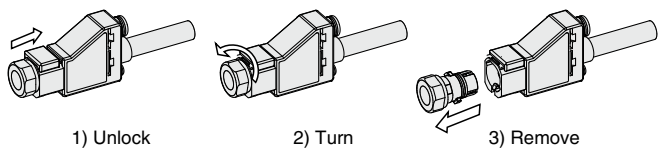

##### Mounting of emitter cartridge

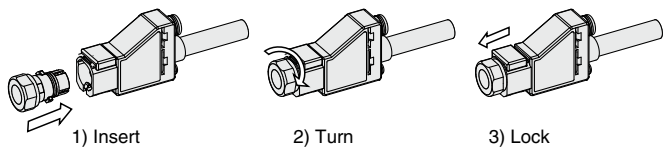


##### 3. Do not disassemble or modify the product.

- Disassembling or modifying the product may cause accidents such as electric shock, failure or fire.
- The product will not be guaranteed if it is disassembled and/or modified.

##### 4. Do not operate the product with wet hands.

- Never operate the product with wet hands. It may cause electric shock or other accidents.

##### 5. When replacing the high voltage cable for the nozzle, be sure to turn off the power supply or air supply to the controller, high voltage power supply module, and nozzle.

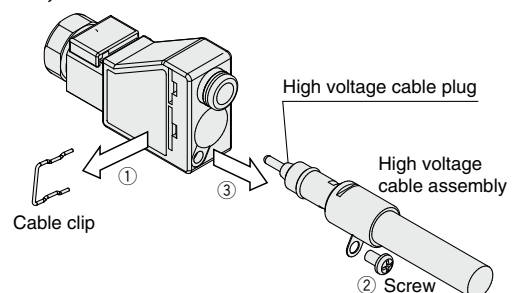



## IZT40/41/42/43 Series


# Specific Product Precautions 6

Be sure to read this before handling the products.  
Refer to the back cover for safety instructions.


### Handling

#### ⚠ Caution

- 1. Do not apply excessive external force or impact (100 m/s<sup>2</sup> or more).**
  - Even though the controller, high voltage power supply module, bar, and nozzle do not appear to be damaged, the internal parts may be damaged and cause a malfunction.
- 2. If the bar length exceeds 820 mm, hold both ends and the middle of the bar to avoid a moment load being applied.**
  - Handling the product by holding either end of the bar may cause deformation or damage of the product.
- 3. The power cable must be connected and disconnected by hand.**
  - The use of tools can result in damage to the product.
  - Hold the connector by hand and pull it out straight.
  - If the connector has a lock mechanism, release the lock and then pull out the connector.
- 4. If smoking, fire, or foul smell occurs in the product, immediately shut off the power supply.**
- 5. Do not touch part A of the high voltage connector and part B of the high voltage cable plug by hand. Be careful that moisture or foreign matter does not adhere to the connector and plug.**
  - Do not touch part A of the high voltage connector and part B of the high voltage cable plug while handling.
  - Keep the high voltage connector and high voltage cable plug free from contamination. Adhesion of moisture, oil, or foreign matter on part A and part B may cause high-voltage electric leakage.
  - If moisture, oil, or foreign matter adheres to part A or part B, clean it with ethanol.

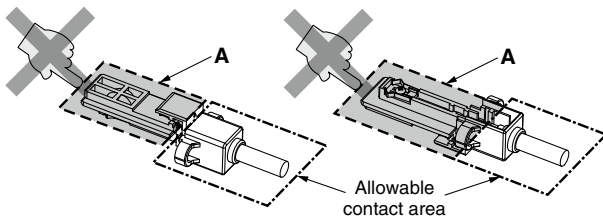


High voltage connector

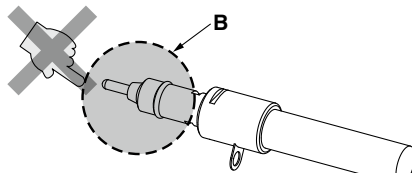



High voltage cable plug

## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

\*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots – Safety.  
etc.

### Warning

#### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

#### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

#### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### Caution

#### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.  
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.  
If anything is unclear, contact your nearest sales branch.

### Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

#### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)  
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.  
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

##### \*2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.  
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

#### Revision History

**Edition B** \* The energy saving high-efficiency cartridge has been added.  
\* The contents of the technical data have been revised.  
\* The weight of the high voltage power supply module has been changed.  
\* Information on the effects on implantable medical devices has been added to the specific product precautions.  
\* Number of pages has been increased from 40 to 44. YQ

**Edition C** \* The nozzle type, IZT43 series has been added.  
\* Number of pages has been increased from 44 to 64. YU

## Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.